



THE DATASHEET OF BSO215C



SIPMOS® Small-Signal-Transistor



Features

- Dual N- and P -Channel
- Enhancement mode
- Logic Level
- Avalanche rated
- dv/dt rated

Product Summary

		N	P	
Drain source voltage	V_{DS}	20	-20	V
Drain-Source on-state resistance	$R_{DS(on)}$	0.1	0.1	Ω
Continuous drain current	I_D	3.7	-3.7	A

Type	Package	Ordering Code
BSO 215 C	SO 8	Q67041-S4025



Maximum Ratings, at $T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Value		Unit
		N	P	
Continuous drain current $T_A = 25\text{ °C}$ $T_A = 70\text{ °C}$	I_D	3.7 3	-3.7 -3	A
Pulsed drain current $T_A = 25\text{ °C}$	$I_{D\text{ puls}}$	14.8	-14.8	
Avalanche energy, single pulse $I_D = 3\text{ A}$, $V_{DD} = 15\text{ V}$, $R_{GS} = 25\ \Omega$ $I_D = -3.7\text{ A}$, $V_{DD} = -15\text{ V}$, $R_{GS} = 25\ \Omega$	E_{AS}	26 -	- 68	mJ
Avalanche energy, periodic limited by $T_{j\text{max}}$	E_{AR}	0.2	0.2	
Reverse diode dv/dt, $T_{j\text{max}} = 150\text{ °C}$ $I_S = 3\text{ A}$, $V_{DS} = 16\text{ V}$, $di/dt = 200\text{ A}/\mu\text{s}$ $I_S = -2.7\text{ A}$, $V_{DS} = -16\text{ V}$, $di/dt = -200\text{ A}/\mu\text{s}$	dv/dt	6 -	- 6	kV/ μs
Gate source voltage	V_{GS}	± 20	± 20	V
Power dissipation $T_A = 25\text{ °C}$	P_{tot}	2	2	W
Operating and storage temperature	T_j, T_{stg}	-55...+150		$^{\circ}\text{C}$
IEC climatic category; DIN IEC 68-1		55/150/56		

Thermal Characteristics

Parameter	Symbol	Values			Unit
		min.	typ.	max.	

Dynamic Characteristics

Thermal resistance, junction - soldering point	N P	R_{thJS}	- -	- -	40 40	K/W
SMD version, device on PCB: @ min. footprint; $t \leq 10$ sec.	N	R_{thJA}	-	-	110	
@ 6 cm ² cooling area 1); $t \leq 10$ sec.	N		-	-	62.5	
@ min. footprint; $t \leq 10$ sec.	P		-	-	100	
@ 6 cm ² cooling area 1); $t \leq 10$ sec.	P		-	-	62.5	

Static Characteristics, at $T_j = 25$ °C, unless otherwise specified

Drain- source breakdown voltage $V_{GS} = 0$ V, $I_D = 250$ μ A $V_{GS} = 0$ V, $I_D = -250$ μ A	N P	$V_{(BR)DSS}$	20 -20	- -	- -	V
Gate threshold voltage, $V_{GS} = V_{DS}$ $I_D = 10$ μ A $I_D = -450$ μ A	N P	$V_{GS(th)}$	1.2 -1	1.5 -1.5	2 -2	
Zero gate voltage drain current $V_{DS} = 20$ V, $V_{GS} = 0$ V, $T_j = 25$ °C $V_{DS} = 20$ V, $V_{GS} = 0$ V, $T_j = 125$ °C $V_{DS} = -20$ V, $V_{GS} = 0$ V, $T_j = 25$ °C $V_{DS} = -20$ V, $V_{GS} = 0$ V, $T_j = 125$ °C	N N P P	I_{DSS}	- - - -	0.1 10 -0.1 -10	1 100 -1 -100	μ A
Gate-source leakage current $V_{GS} = 20$ V, $V_{DS} = 0$ V $V_{GS} = -20$ V, $V_{DS} = 0$ V	N P	I_{GSS}	- -	10 -10	100 -100	nA
Drain-Source on-state resistance $V_{GS} = 4.5$ V, $I_D = 3$ A $V_{GS} = -4.5$ V, $I_D = -3$ A	N P	$R_{DS(on)}$	- -	0.1 0.1	0.15 0.15	Ω
Drain-Source on-state resistance $V_{GS} = 10$ V, $I_D = 3.7$ A $V_{GS} = -10$ V, $I_D = -3.7$ A	N P	$R_{DS(on)}$	- -	0.05 0.06	0.1 0.1	Ω

¹Device on 40mm*40mm*1.5mm epoxy PCB FR4 with 6cm² (one layer, 70 μ m thick) copper area for drain connection. PCB is vertical without blown air.

Electrical Characteristics, at $T_j = 25\text{ °C}$, unless otherwise specified


Parameter	Symbol	Values			Unit	
		min.	typ.	max.		
Characteristics						
Transconductance		g_{fs}				S
$V_{DS} \geq 2 \cdot I_D \cdot R_{DS(on)max}$, $I_D = 3\text{ A}$	N		2.1	4.4	-	
$V_{V_{DS} \geq 2 \cdot I_D \cdot R_{DS(on)max}}$, $I_D = -3\text{ A}$	P		2.6	5.2	-	
Input capacitance		C_{iss}				pF
$V_{GS} = 0\text{ V}$, $V_{DS} = 25\text{ V}$, $f = 1\text{ MHz}$	N		-	197	246	
$V_{GS} = 0\text{ V}$, $V_{DS} = -25\text{ V}$, $f = 1\text{ MHz}$	P		-	380	475	
Output capacitance		C_{oss}				
$V_{GS} = 0\text{ V}$, $V_{DS} = 25\text{ V}$, $f = 1\text{ MHz}$	N		-	109	136	
$V_{GS} = 0\text{ V}$, $V_{DS} = -25\text{ V}$, $f = 1\text{ MHz}$	P		-	290	360	
Reverse transfer capacitance		C_{rss}				
$V_{GS} = 0\text{ V}$, $V_{DS} = 25\text{ V}$, $f = 1\text{ MHz}$	N		-	59	74	
$V_{GS} = 0\text{ V}$, $V_{DS} = -25\text{ V}$, $f = 1\text{ MHz}$	P		-	103	128	
Turn-on delay time		$t_{d(on)}$				ns
$V_{DD} = 10\text{ V}$, $V_{GS} = 4.5\text{ V}$, $I_D = 3\text{ A}$, $R_G = 33\text{ }\Omega$	N		-	15	22.5	
$V_{DD} = -10$, $V_{GS} = -4.5\text{ V}$, $I_D = -3\text{ A}$, $R_G = 13\text{ }\Omega$	P		-	24	36	
Rise time		t_r				
$V_{DD} = 10\text{ V}$, $V_{GS} = 4.5\text{ V}$, $I_D = 3\text{ A}$, $R_G = 33\text{ }\Omega$	N		-	88	132	
$V_{DD} = -10$, $V_{GS} = -4.5\text{ V}$, $I_D = -3\text{ A}$, $R_G = 13\text{ }\Omega$	P		-	236	354	
Turn-off delay time		$t_{d(off)}$				
$V_{DD} = 10\text{ V}$, $V_{GS} = 4.5\text{ V}$, $I_D = 3\text{ A}$, $R_G = 33\text{ }\Omega$	N		-	12.3	18.5	
$V_{DD} = -10$, $V_{GS} = -4.5\text{ V}$, $I_D = -3\text{ A}$, $R_G = 13\text{ }\Omega$	P		-	87	130	
Fall time		t_f				
$V_{DD} = 10\text{ V}$, $V_{GS} = 4.5\text{ V}$, $I_D = 3\text{ A}$, $R_G = 33\text{ }\Omega$	N		-	17.1	25.7	
$V_{DD} = -10\text{ V}$, $V_{GS} = -4.5\text{ V}$, $I_D = -3\text{ A}$, $R_G = 13\text{ }\Omega$	P		-	168	252	

Electrical Characteristics, at $T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Values			Unit	
		min.	typ.	max.		
Characteristics						
Gate to source charge $V_{DD} = 16, I_D = 3.7\text{ A}$ $V_{DD} = -16, I_D = -3.7\text{ A}$	N P	Q_{gs}	- -	1.3 1.9	2 2.9	nC
Gate to drain charge $V_{DD} = 16, I_D = 3.7\text{ A}$ $V_{DD} = -16, I_D = -3.7\text{ A}$	N P	Q_{gd}	- -	3 4.4	4.5 6.6	
Gate charge total $V_{DD} = 16, I_D = 3.7\text{ A}, V_{GS} = 0\text{ to }10\text{ V}$ $V_{DD} = -16, I_D = -3.7\text{ A}, V_{GS} = 0\text{ to }-10\text{ V}$	N P	Q_g	- -	7.7 13.2	11.5 19.8	
Gate plateau voltage $V_{DD} = 16, I_D = 3.7\text{ A}$ $V_{DD} = -16, I_D = -3.7\text{ A}$	N P	$V_{(plateau)}$	- -	3.5 2.8	- -	V
Reverse Diode						
Inverse diode continuous forward current $T_A = 25\text{ °C}$	N P	I_S	- -	- -	3.7 -3.7	A
Inverse diode direct current, pulsed $T_A = 25\text{ °C}$	N P	I_{SM}	- -	- -	14.8 -14.8	
Inverse diode forward voltage $V_{GS} = 0\text{ V}, I_F = I_S$ $V_{GS} = 0\text{ V}, I_F = I_S$	N P	V_{SD}	- -	0.84 -0.82	1.1 -1	V
Reverse recovery time $V_R = 10\text{ V}, I_F = I_S, di_F/dt = 100\text{ A}/\mu\text{s}$ $V_R = -10\text{ V}, I_F = I_S, di_F/dt = -100\text{ A}/\mu\text{s}$	N P	t_{rr}	- -	46.5 137	70 205	ns
Reverse recovery charge $V_R = 10\text{ V}, I_F = I_S, di_F/dt = 100\text{ A}/\mu\text{s}$ $V_R = -10\text{ V}, I_F = I_S, di_F/dt = -100\text{ A}/\mu\text{s}$	N P	Q_{rr}	- -	18.4 80	27.6 120	μC


Power Dissipation (N-Ch.)

$$P_{\text{tot}} = f(T_A)$$

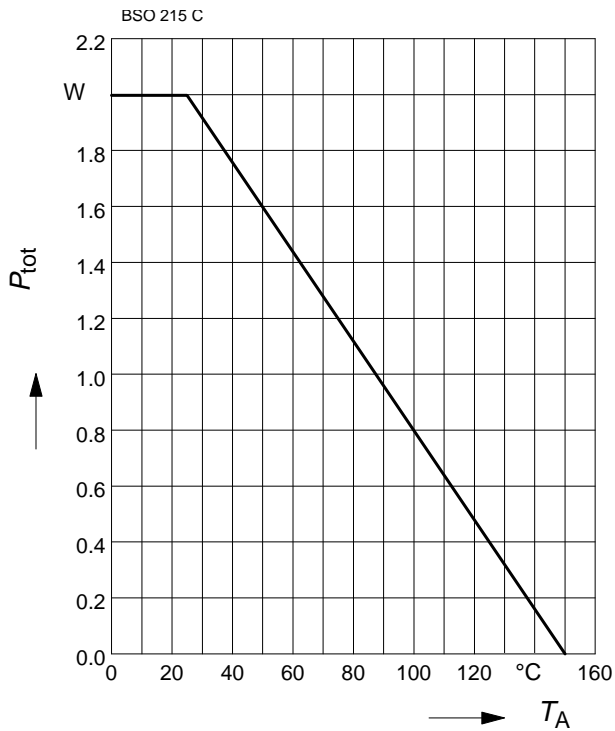

Power Dissipation (P-Ch.)


$$P_{\text{tot}} = f(T_A)$$

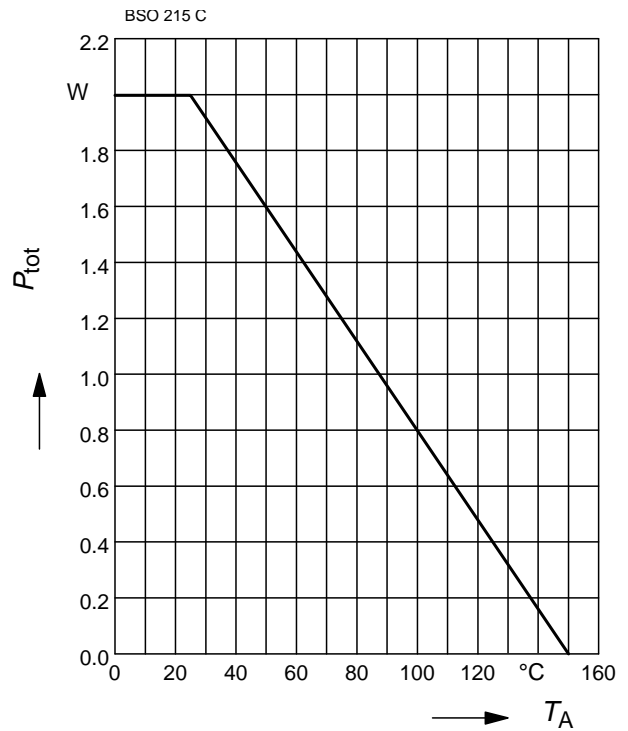

Drain current (N-Ch.)

$$I_D = f(T_A)$$


parameter: $V_{GS} \geq 10$ V

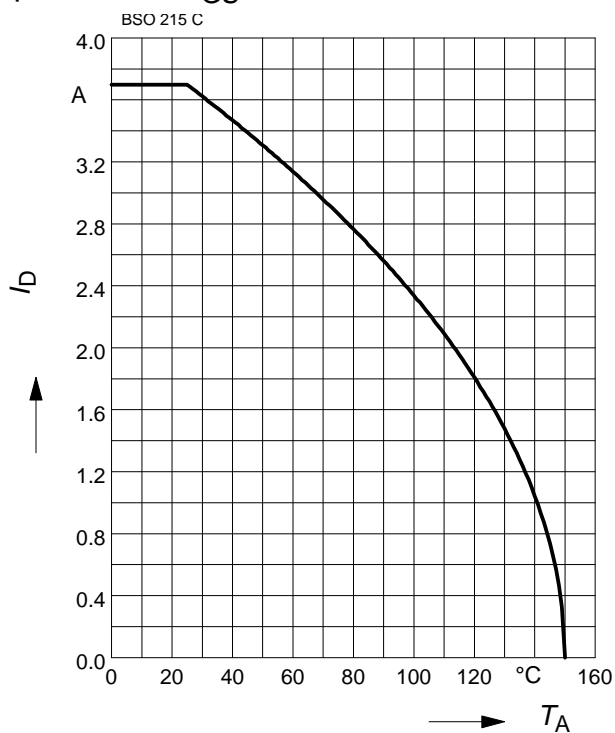

Drain current (P-Ch.)

$$I_D = f(T_A)$$


parameter: $V_{GS} \geq -10$ V

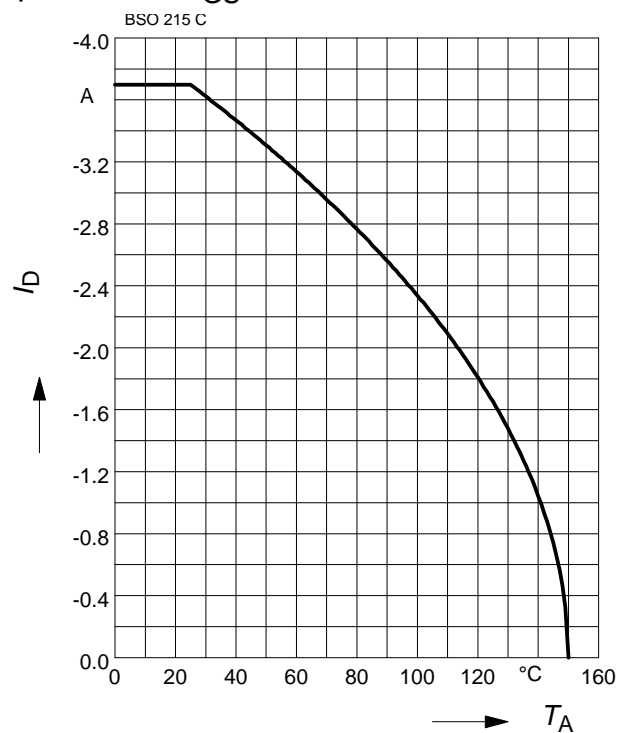

Safe operating area (N-Ch.)

$$I_D = f(V_{DS})$$


parameter : $D = 0$, $T_A = 25\text{ }^\circ\text{C}$

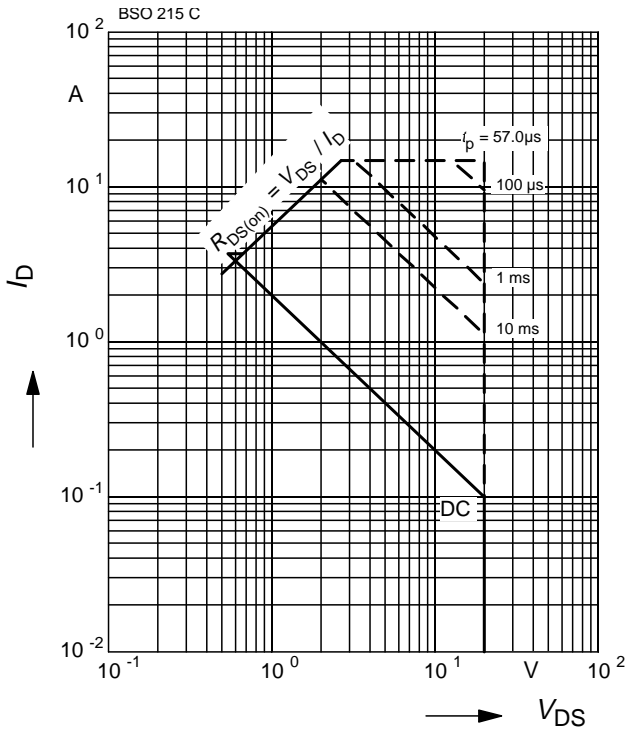

Safe operating area (P-Ch.)

$$I_D = f(V_{DS})$$


parameter : $D = 0$, $T_A = 25\text{ }^\circ\text{C}$

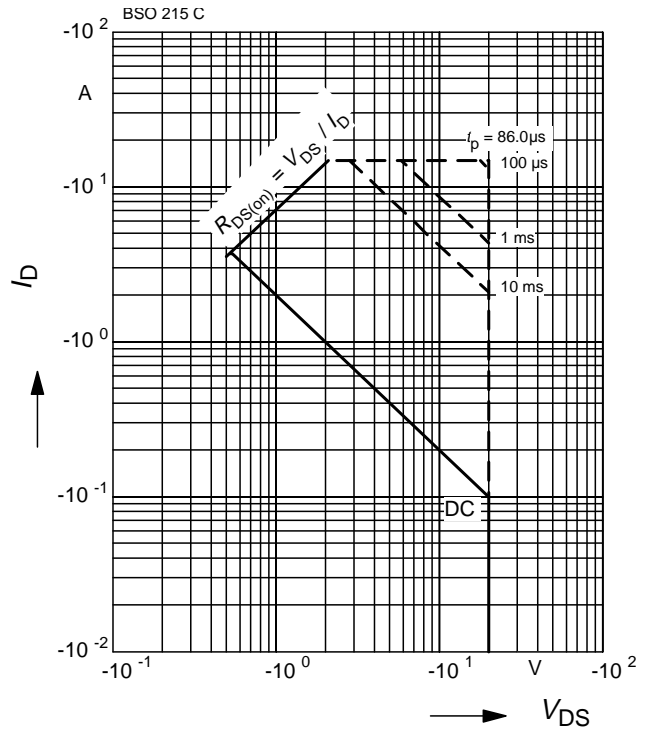

Transient thermal impedance (N-Ch.)

$$Z_{thJC} = f(t_p)$$


parameter : $D = t_p/T$

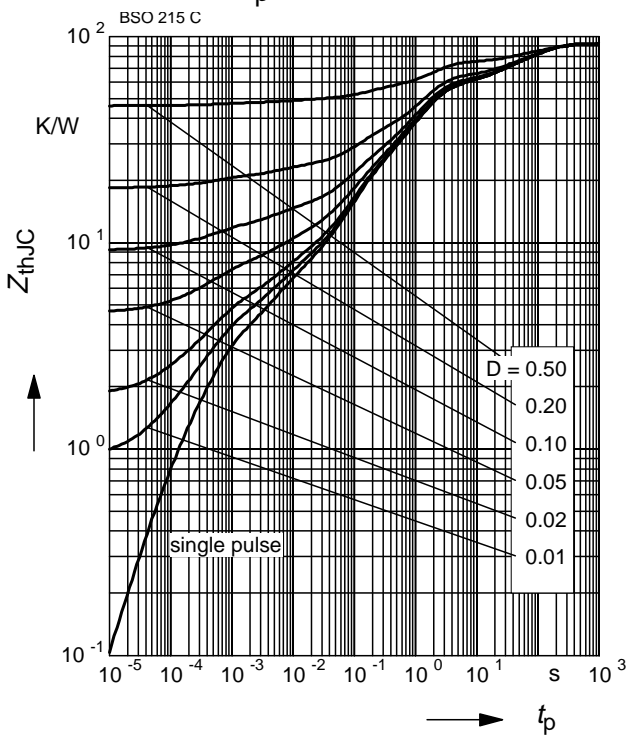

Transient thermal impedance (P-Ch.)

$$Z_{thJC} = f(t_p)$$


parameter : $D = t_p/T$

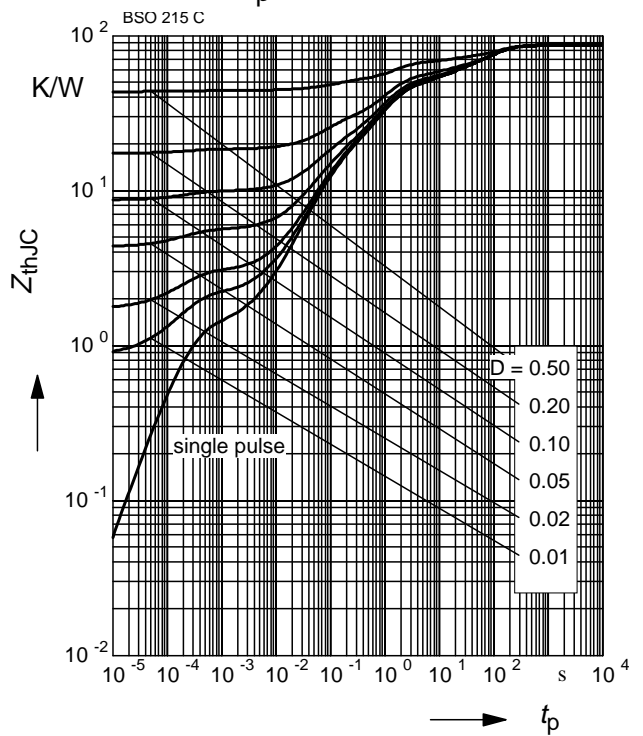

Typ. output characteristics (N-Ch.)

$$I_D = f(V_{DS})$$


parameter: $t_p = 80 \mu s$

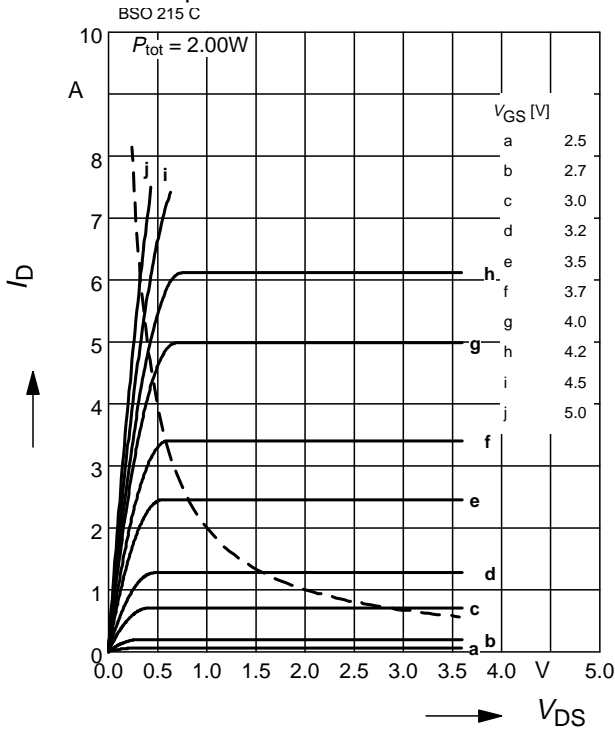

Typ. output characteristics (P-Ch.)

$$I_D = f(V_{DS})$$


parameter: $t_p = 80 \mu s$

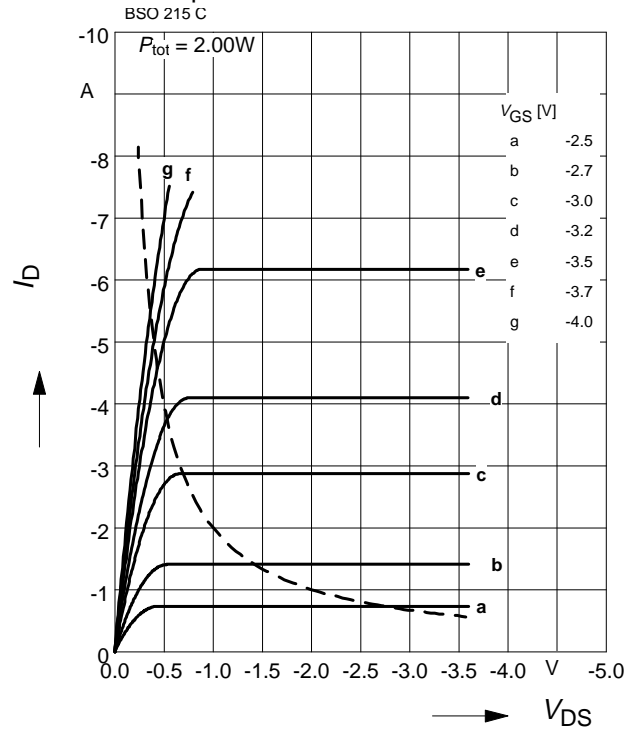

Typ. drain-source-on-resistance (N-Ch.)

$$R_{DS(on)} = f(I_D)$$


parameter: V_{GS}

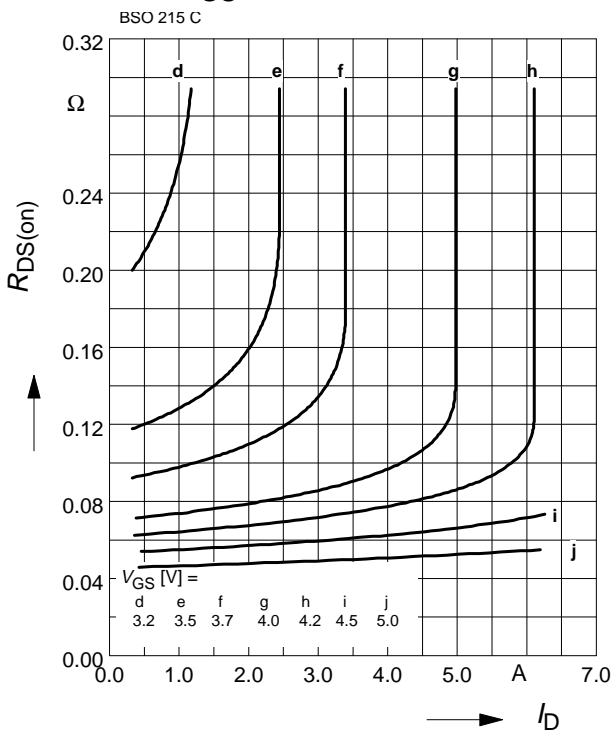

Typ. drain-source-on-resistance (P-Ch.)

$$R_{DS(on)} = f(I_D)$$


parameter: V_{GS}

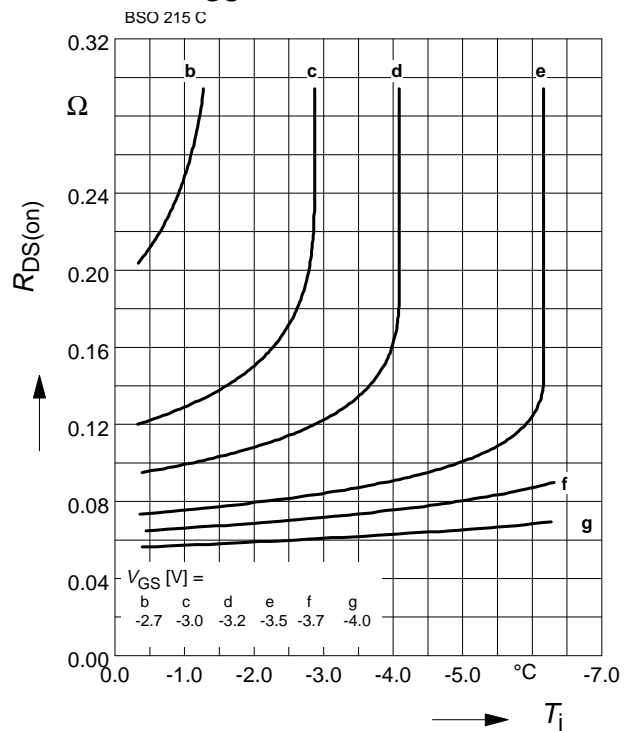

Typ. transfer characteristics (N-Ch.)

parameter: $t_p = 80 \mu s$


$I_D = f(V_{GS}), V_{DS} \geq 2 \times I_D \times R_{DS(on)max}$

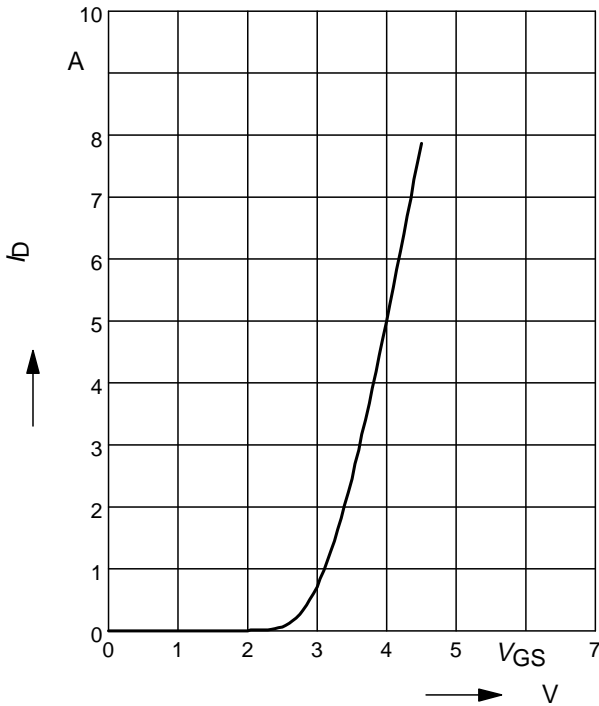

Typ. transfer characteristics (P-Ch.)

parameter: $t_p = 80 \mu s$


$I_D = f(V_{GS}), V_{DS} \geq 2 \times I_D \times R_{DS(on)max}$

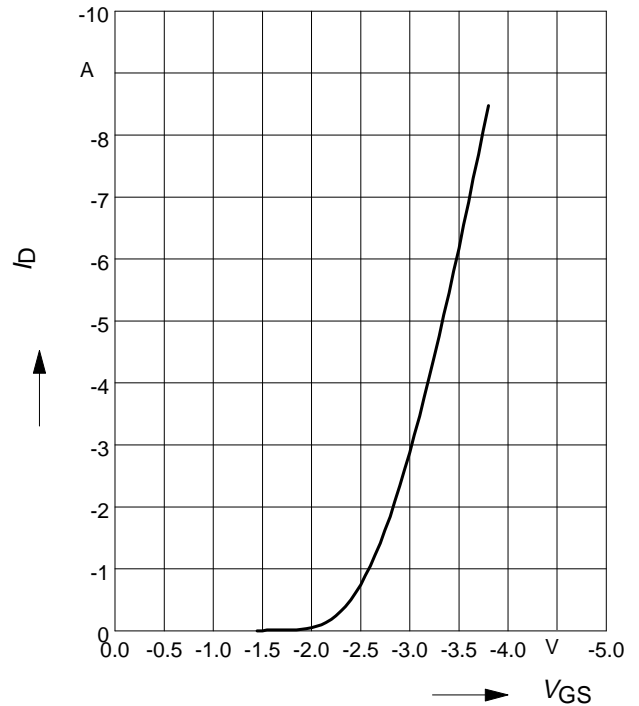

Typ. forward transconductance (N-Ch.)

$g_{fs} = f(I_D); T_j = 25 \text{ }^\circ\text{C}$


parameter: g_{fs}

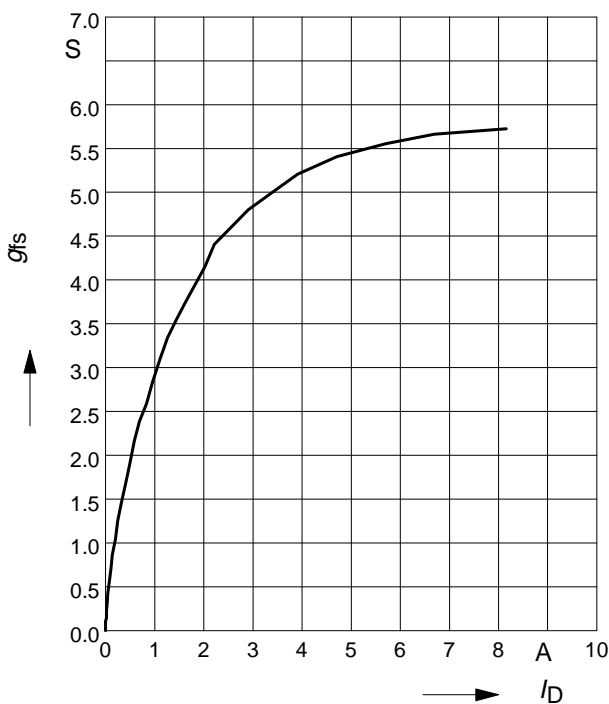

Typ. forward transconductance (P-Ch.)

$g_{fs} = f(I_D); T_j = 25 \text{ }^\circ\text{C}$


parameter: g_{fs}

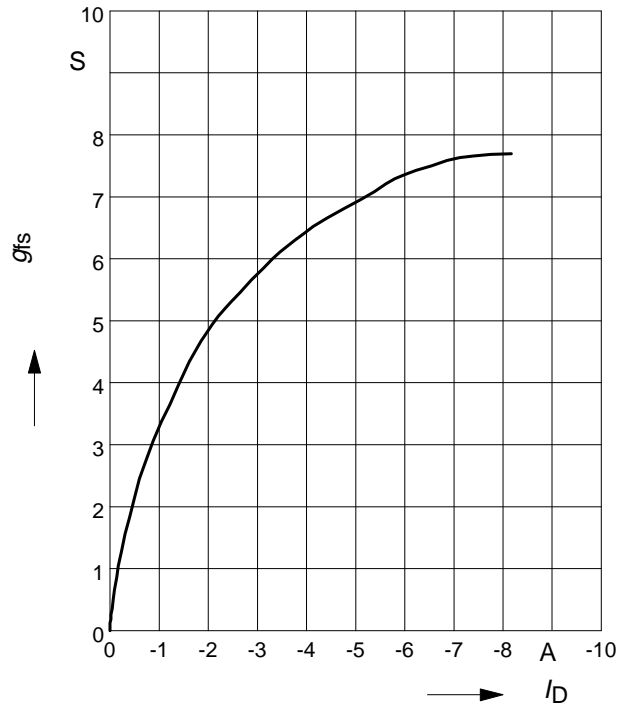

Drain-source on-resistance (N-Ch.)

$$R_{DS(on)} = f(T_j)$$


parameter : $I_D = 3.7 \text{ A}$, $V_{GS} = 10 \text{ V}$

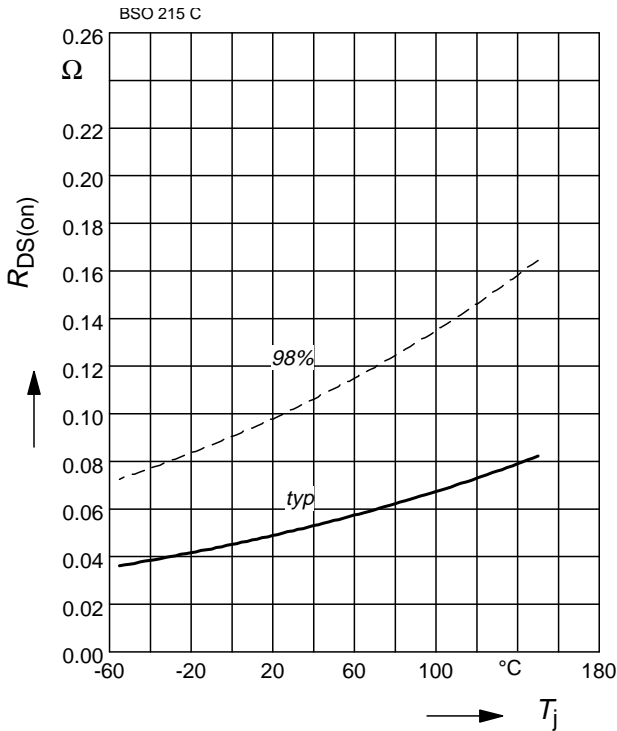

Drain-source on-resistance (P-Ch.)

$$R_{DS(on)} = f(T_j)$$


parameter : $I_D = -3.7 \text{ A}$, $V_{GS} = -10 \text{ V}$

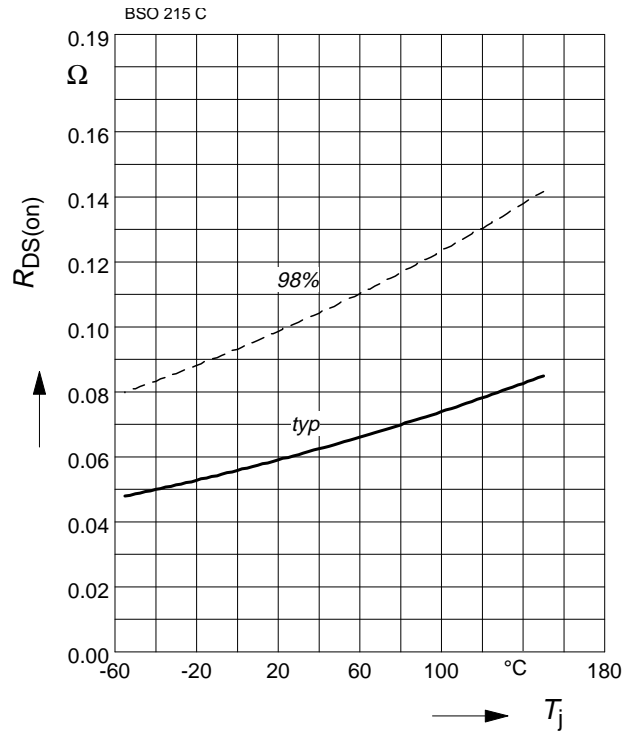

Gate threshold voltage (N-Ch.)

$$V_{GS(th)} = f(T_j)$$


parameter: $V_{GS} = V_{DS}$, $I_D = 10 \mu\text{A}$

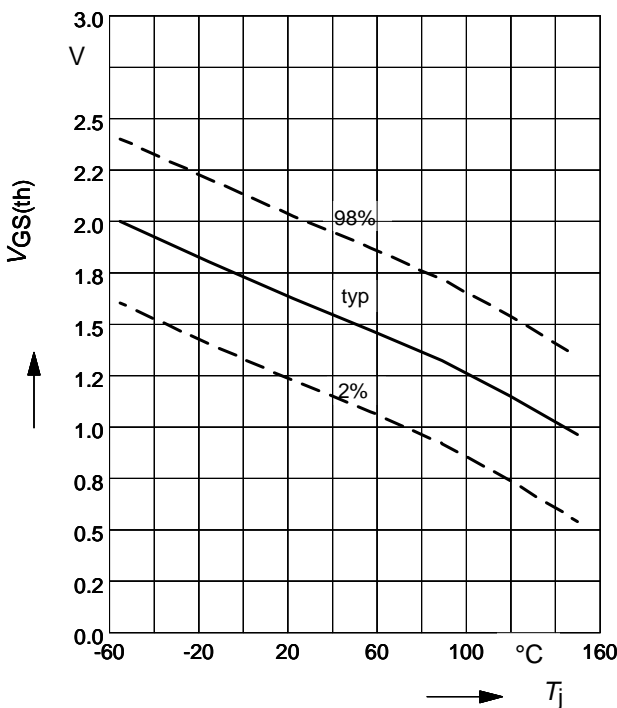

Gate threshold voltage (P-Ch.)

$$V_{GS(th)} = f(T_j)$$


parameter: $V_{GS} = V_{DS}$, $I_D = -450 \mu\text{A}$

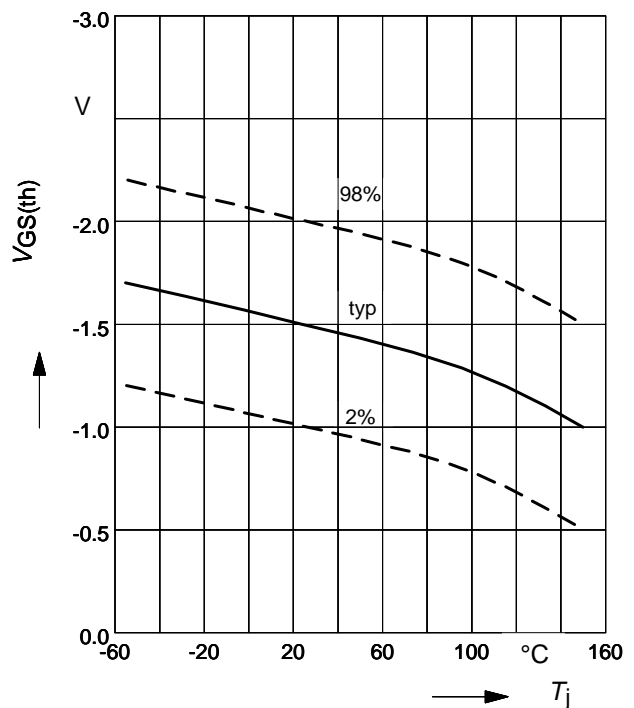

Typ. capacitances (N-Ch.)

$C = f(V_{DS})$


parameter: $V_{GS}=0\text{ V}$, $f=1\text{ MHz}$

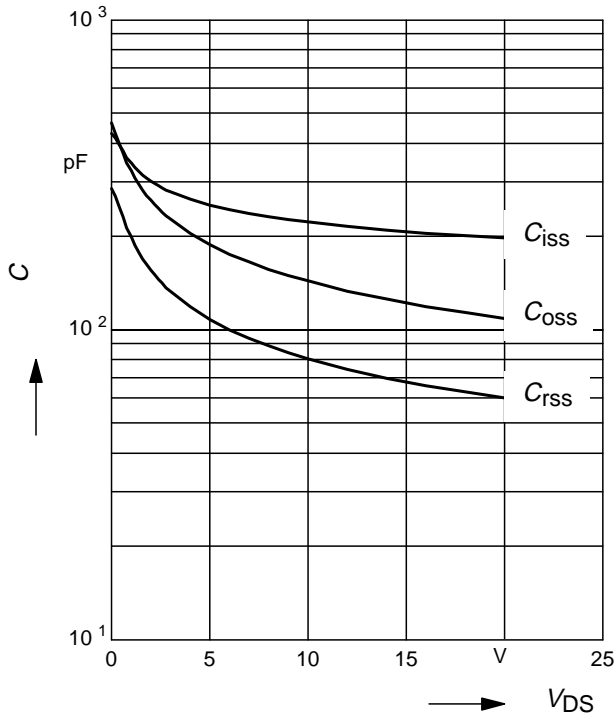

Typ. capacitances (P-Ch.)

$C = f(V_{DS})$


parameter: $V_{GS}=0\text{ V}$, $f=1\text{ MHz}$

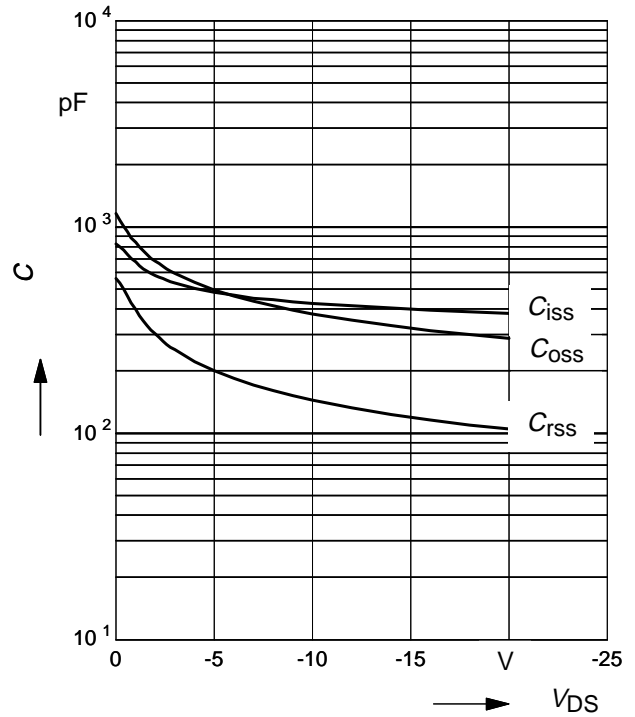

Forward characteristics of reverse diode

$I_F = f(V_{SD})$, (N-Ch.)


parameter: T_j , $t_p = 80\ \mu\text{s}$

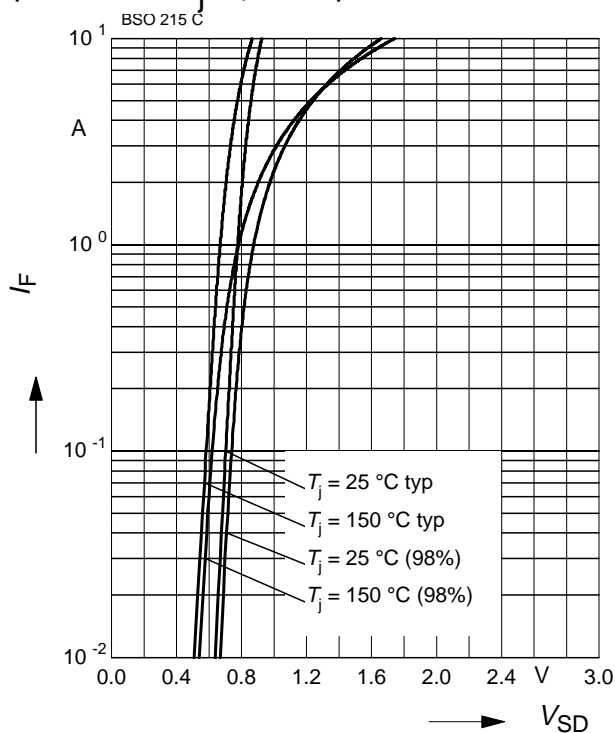

Forward characteristics of reverse diode

$I_F = f(V_{SD})$, (P-Ch.)


parameter: T_j , $t_p = 80\ \mu\text{s}$

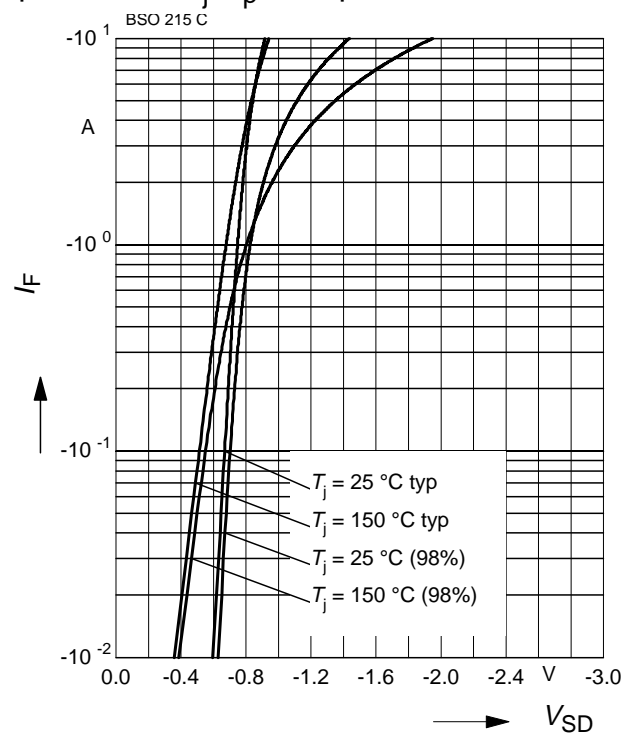

Avalanche Energy $E_{AS} = f(T_j)$ (N-Ch.)

parameter: $I_D = 3 \text{ A}$, $V_{DD} = 15 \text{ V}$


$R_{GS} = 25 \Omega$

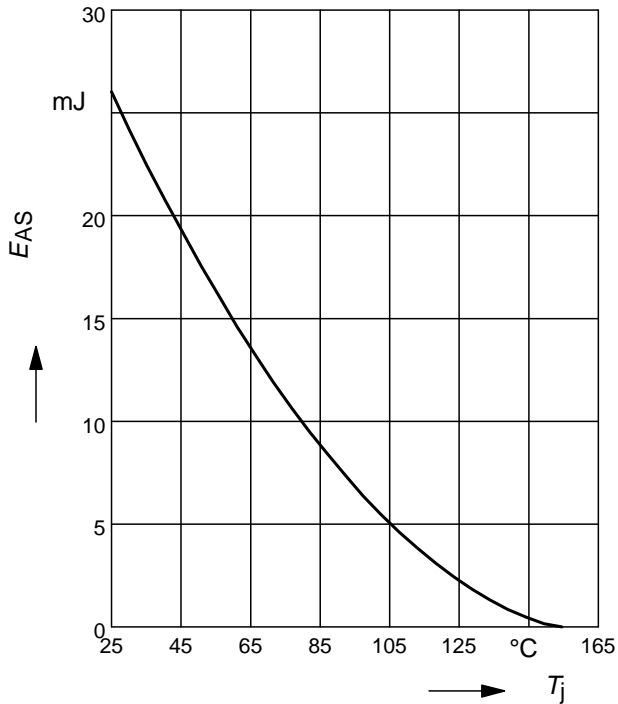

Avalanche Energy $E_{AS} = f(T_j)$

parameter: $I_D = -3.7 \text{ A}$, $V_{DD} = -15 \text{ V}$


$R_{GS} = 25 \Omega$

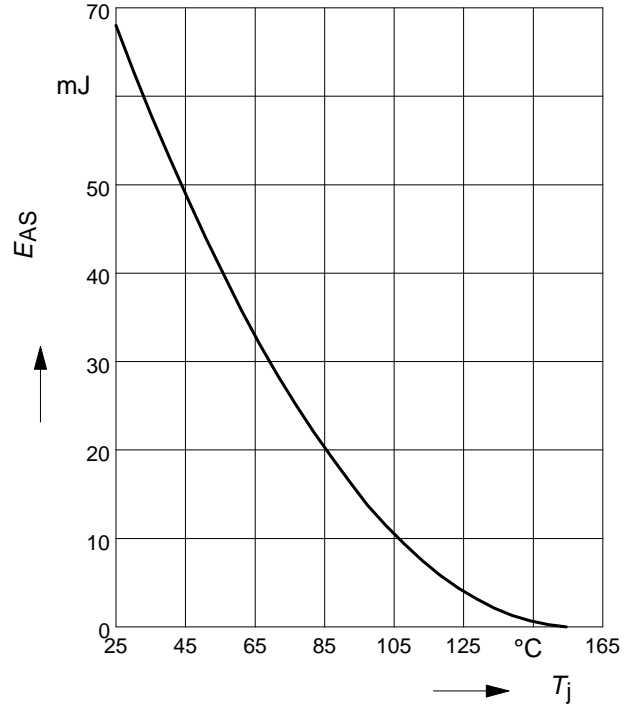

Typ. gate charge (N-Ch.)

$V_{GS} = f(Q_{Gate})$


parameter: $I_D = 3.7 \text{ A}$

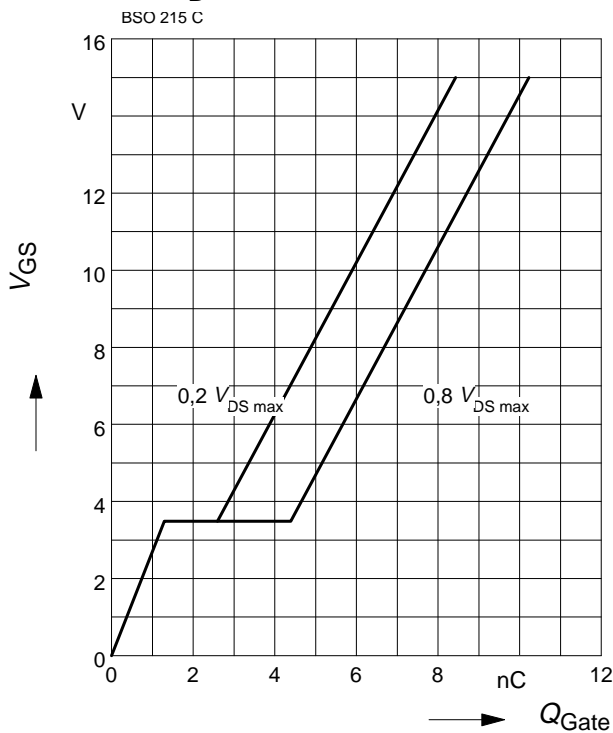

Typ. gate charge (P-Ch.)


$V_{GS} = f(Q_{Gate})$

parameter: $I_D = -3.7 \text{ A}$

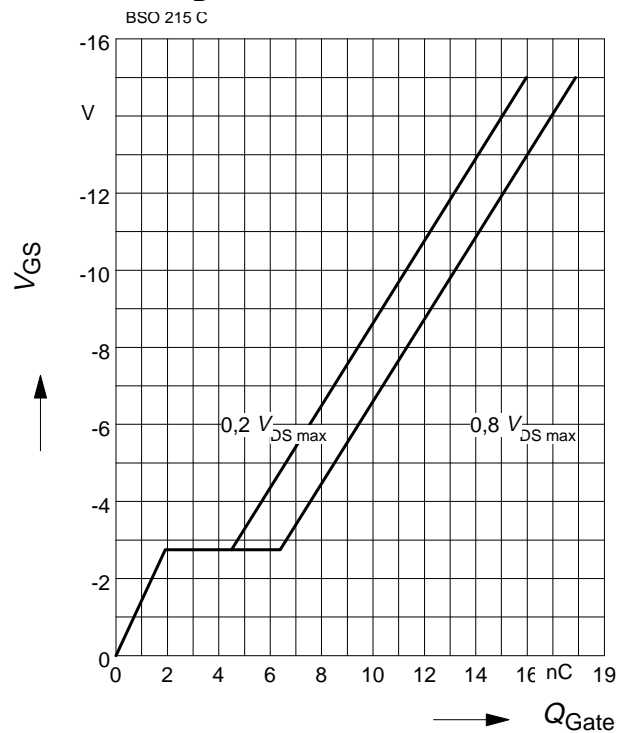


Drain-source breakdown voltage

$$V_{(BR)DSS} = f(T_j), \text{ (N-Ch.)}$$

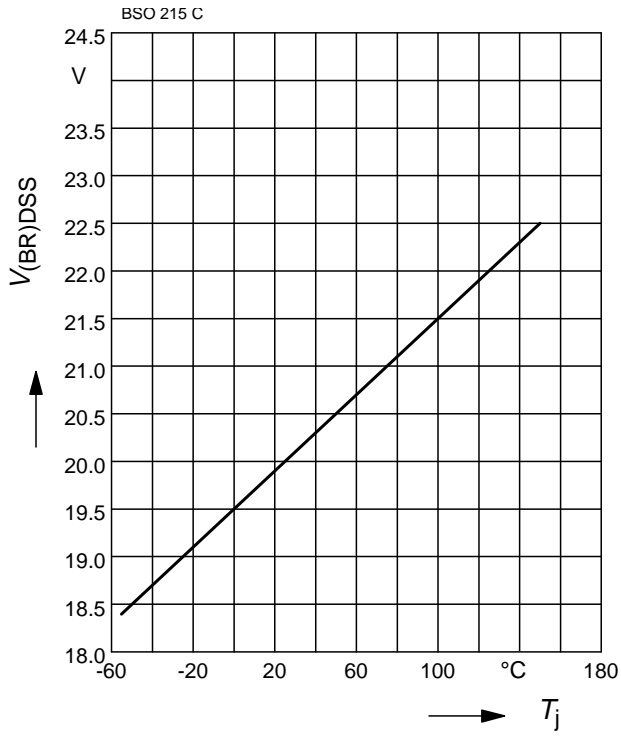

Drain-source breakdown voltage

$$V_{(BR)DSS} = f(T_j)$$

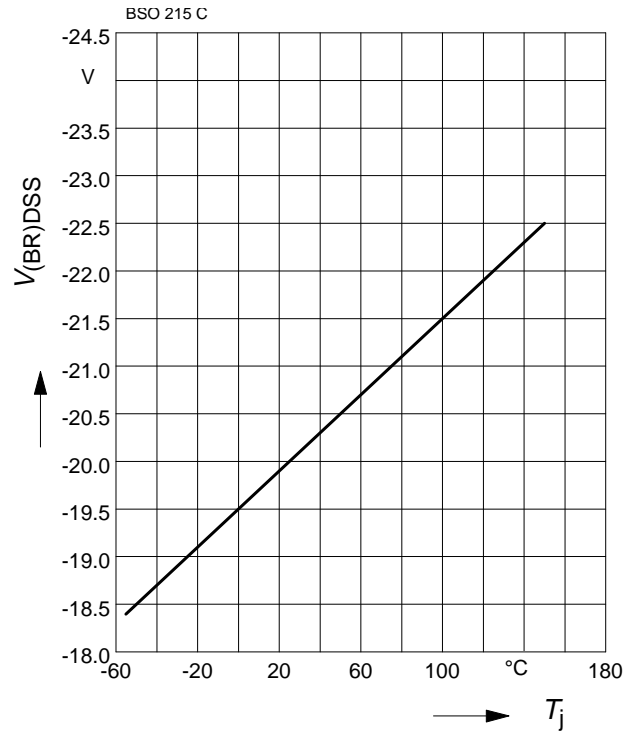

Published by
Infineon Technologies AG,
Bereichs Kommunikation
St.-Martin-Strasse 53,
D-81541 München
© Infineon Technologies AG 1999
All Rights Reserved.

Attention please!

The information herein is given to describe certain components and shall not be considered as warranted characteristics.

Terms of delivery and rights to technical change reserved.

We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

Infineon Technologies is an approved CECC manufacturer.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office in Germany or our Infineon Technologies Representatives worldwide (see address list).

Warnings



Due to technical requirements components may contain dangerous substances.

For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View BSO215C on WIN SOURCE](#)
-  [Infineon Technologies Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management