



**THE DATASHEET OF
AS5304A-ATST**



AS5304

Magnet Specification

Magnetic Multipole Strip MS20-150 Pole Length 2.0mm, 150 Poles

1 General

This specification defines the dimensional and magnetic properties of a multipole magnetic strip for use with the AS5304 magnetic linear motion and off-axis rotary angle encoder.

Material: Strontium ferrite bonded

2 Dimensional Specification

Parameter	Symbol	Min	Typ	Max	Unit	Note
Strip Length	L		300±2		mm	Active length = 300mm
Strip Width	W		10±0.2		mm	Active width = 10mm
Strip Thickness	T		1,3±0,15		mm	1mm rubber bonded magnet on 0.3mm stainless steel strip
Thermal Expansion			17		$\times 10^{-6}/K$	Mechanical length expansion
Density		3.5 1.43	3.65 4.64	3.8 7.85	g/cm^3	magnetic rubber stainless steel
Delivery	Single cut pieces without adhesive, rolls of 25m, 50m (up to 100m max.)					

3 Magnet Specification

Parameter	Symbol	Min	Typ	Max	Unit	Note
Pole Length	L_p		2.00		mm	Results in pole pair length of 4.0mm (150 poles @ 1.0mm)
Pole Length Deviation			1	1.5	% of $2 \cdot L_p$	Measured at $B_z=0$, all poles within active area
Amplitude Variation				±10	% of B_{pk}	All poles within active area
Number of Poles			150		poles	Excluding poles with $L < L_p$ at the ends of the strip
Resolution	Res		25		μm	AS5304 @ incremental output
Magnetic Field Amplitude @ 0.8mm Distance	B_{pk}				mT	Vertical component of the magnetic field strength in the center of the strip at 25°C
Magnetic Field Temperature Drift	Tk_{B_r}		-0.2		%/K	

Parameter	Symbol	Min	Typ	Max	Unit	Note
Cumulative error				40 20 10	μm/m	depending on accuracy grade standard A20 A10
Thermal Expansion				1E-4	1/K	Mechanical length expansion
Temperature Range	Tamb	-40	25	100	°C	scale mounted, no bending

Magnetization

The MS20-150 magnet strip is magnetized on the top side and bonded on a steel support with elastomer adhesive (bottom). Note that the polarization of the magnet will change when it is rotated as the pole arrangement not symmetric. This will influence the position of the index pulse. An index pulse is generated when the North and South poles are placed over the Hall array as shown in Figure 2.

The incremental output count increases when the magnet is moving to the left, facing the chip with pin#1 at the lower left corner (see Figure 2, top drawing). At the same time, the absolute position information increases.

Likewise, the position information decreases when the magnet is moved in the opposite direction. Note that there is no hysteresis at the absolute output. In order to get a stable 12-bit absolute reading, it may be necessary to filter the values by averaging, e.g. a moving average calculation in the external microcontroller. Averaging 4 readings results in 6dB (=50%) noise and jitter reduction. An average of 16 readings reduces the jitter by a factor of 4.

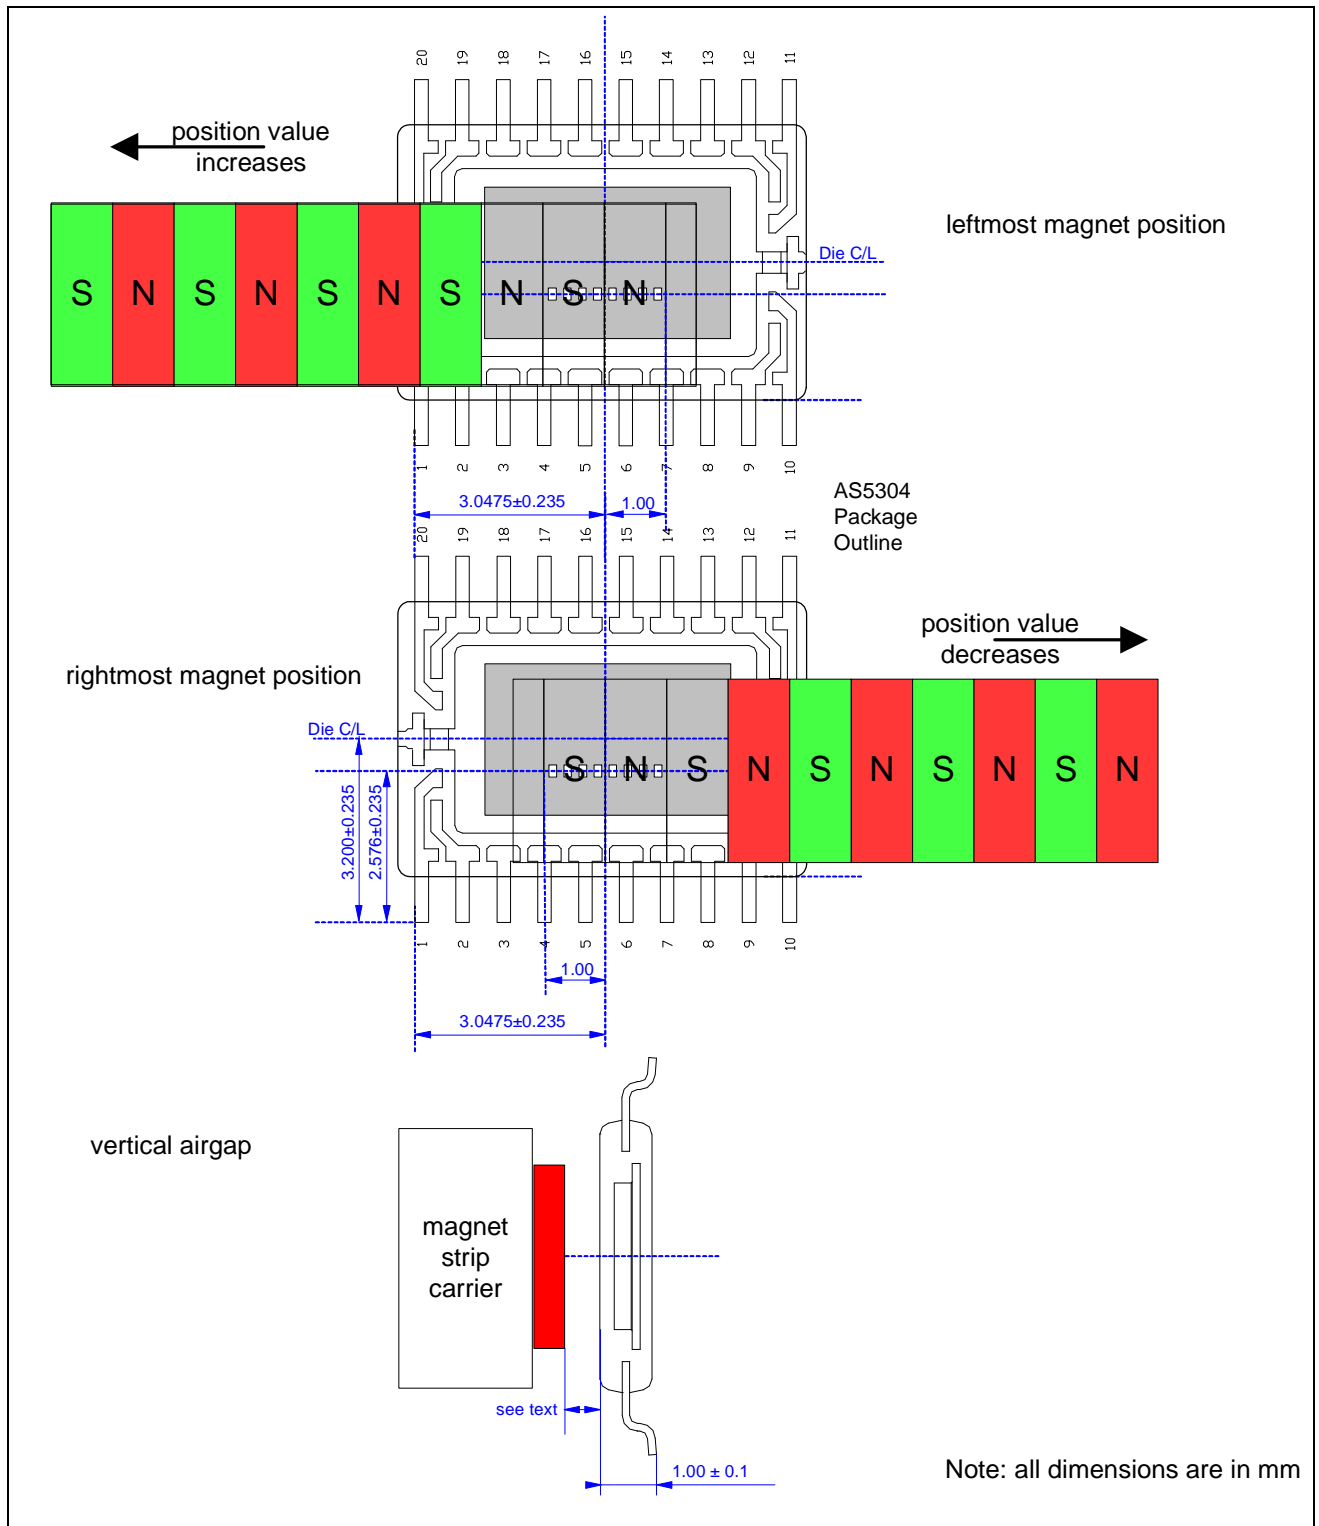
Mounting the Magnet Strip

The magnet strip may be mounted directly on magnetic or non-magnetic surfaces. When magnetic surfaces are used, the strip must be mounted on top of the surface, but not immersed in a cavity, as this may weaken the magnetic field of the magnet. When mounting the magnet on a non-magnetic surface, either method is acceptable.

For more rigid demands, magnet suppliers offer customized solutions where the magnet material is directly overmolded on the carrier, e.g. a shaft, bushing, plate, etc..





Please contact your magnet supplier for more information. A list of recommended suppliers is available for download on the austriamicrosystems website.

Figure 2: Alignment of magnet strip with AS5304 sensor IC



Note that the polarization of the magnet will be reversed when it is rotated or flipped (see Magnetization for more details).

5 Adhesive Tape Specification

	Adhesive	Acrylic	
	Colour	Transparent	
	Thickness of adhesive tape	0.13 mm	
	Protective cap	Paper	
	Temperature resistance permanently short term	150°C 260°C	
	Peel Force ASTM D3330, after 72h, 300 mm/Min.; 90°; RT; Steel	131 (N/100mm)	
	Tensile Strength ASTM D-897, after 72h; Steel 12.7 mm/Min.; 6.45cm²; RT	69 (N/cm²)	
	Shearing Strength Dynamic ASTM D-1002, after 72h; Steel 12.7 mm/Min.; 6,45cm²; RT	55 (N/cm²)	
	Shearing strength static ASTM D-3654 after 72h; Steel; > 10.000 Min.; 3.23cm²; RT	20°C	1000g
		65°C	1000g
		90°C	1000g
		120°C	1000g
		150°C	500g
		175°C	500g
	Length of reel	55m/165m	
	Roll width minimum maximum	6 mm 1200 mm	
	Cutting tolerance	± 0.4mm	
	Inner core diameter	76.2 mm	

Copyrights

Copyright © 2011, austriamicrosystems AG, Schloss Premstaetten, 8141 Unterpremstaetten, Austria-Europe.

Trademarks Registered ®. All rights reserved. The material herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner.

All products and companies mentioned are trademarks or registered trademarks of their respective companies.

Disclaimer

Devices sold by austriamicrosystems AG are covered by the warranty and patent indemnification provisions appearing in its Term of Sale. austriamicrosystems AG makes no warranty, express, statutory, implied, or by description regarding the information set forth herein or regarding the freedom of the described devices from patent infringement. austriamicrosystems AG reserves the right to change specifications and prices at any time and without notice. Therefore, prior to designing this product into a system, it is necessary to check with austriamicrosystems AG for current information. This product is intended for use in normal commercial applications. Applications requiring extended temperature range, unusual environmental requirements, or high reliability applications, such as military, medical life-support or lifesustaining equipment are specifically not recommended without additional processing by austriamicrosystems AG for each application.

The information furnished here by austriamicrosystems AG is believed to be correct and accurate. However, austriamicrosystems AG shall not be liable to recipient or any third party for any damages, including but not limited to personal injury, property damage, loss of profits, loss of use, interruption of business or indirect, special, incidental or consequential damages, of any kind, in connection with or arising out of the furnishing, performance or use of the technical data herein. No obligation or liability to recipient or any third party shall arise or flow out of austriamicrosystems AG rendering of technical or other services.



Contact Information

Headquarters

austriamicrosystems AG

A-8141 Schloss Premstaetten, Austria

Tel: +43 (0) 3136 500 0

Fax: +43 (0) 3136 525 01

Magnet Supplier Information

Bogen Electronic GmbH1,

Potsdamer Strasse 12-13

14163 Berlin

Germany

<http://www.bogen-electronic.de/>

For Sales Offices, Distributors and Representatives, please visit:

<http://www.austriamicrosystems.com/contact>

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View AS5304A-ATST on WIN SOURCE](#)
- ⊖ [ams Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management