




**THE DATASHEET OF
LA50P12004**



OUTLINE REF.	MOUNTING** TYPE	DIMENSIONS IN INCHES (mm in parentheses)						
		A	B	C	D	E	F	G
LA50P900 TO 1200	4, 4T†	6.97 (177)	3.00 (76.2)	3.22 (81.8)	4.97 (126)	0.63 (16.0)	2.38 (60.5)	0.44 (11.1)

†OPTIONAL TRIGGER INDICATOR (TI)

**MOUNTING TYPE: 4 - BOLT-IN BLADES

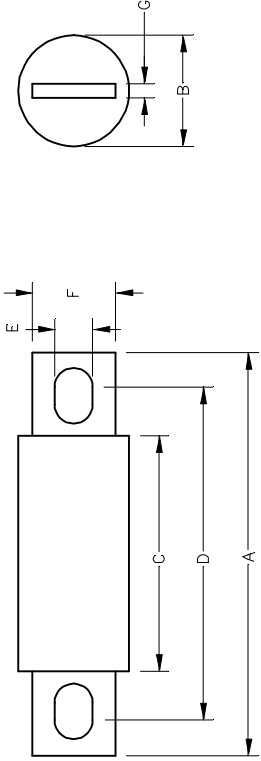

RATINGS

AC: 900-1200A 500VAC, 100KA I.R.

DC: 900-1000A 450VDC, 79KA I.R.

L/R = 10 ms

CATALOG NUMBER	FUSE AMPERE RATINGS	INDICATOR	LPC CODE
LA50P9004	900	NO	079458 15145
LA50P10004	1000	NO	079458 15146
LA50P10004TI	1000	YES	079458 15148
LA50P12004	1200	NO	079458 15147
LA50P12004TI	1200	YES	079458 15149

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

● DENOTES CRITICAL CHARACTERISTICS.

CPK DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE

ST DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITELFUSE INSPECTION INSTRUCTIONS.

CP DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.

DRM	1 9 18	2 10 19	60989
MATL SPEC	COPLES TO	LTR	A
FINISH			

SCALE	DATE	MRD
1:2	02/21/03	

BILL OF MATERIAL

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View LA50P12004 on WIN SOURCE](#)

 [Littelfuse Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management