




**THE DATASHEET OF  
CDEP134NP-1R8MC-H**



# SMD Power Inductor CDEP134



## Description

- Ferrite core construction.
- Magnetically shielded.
- L × W × H: 13.9 × 13.9 × 4.9 mm Max.
- Product weight: 2.6g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

## Environmental Data

- Operating temperature range: -40°C ~ +125°C (including coil's self temperature rise)
- Storage temperature range: -40°C ~ +125°C
- Solder reflow temperature: 260 °C peak.


## Packaging

- Carrier tape and reel packaging
- 11.8" diameter reel
- 500pcs per reel


## Applications

- Ideally used in Notebook PC CPU power supply.

## Dimension - [mm]

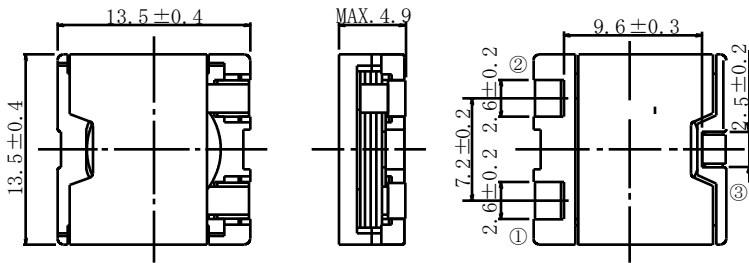

## Land pattern and Schematics - [mm]

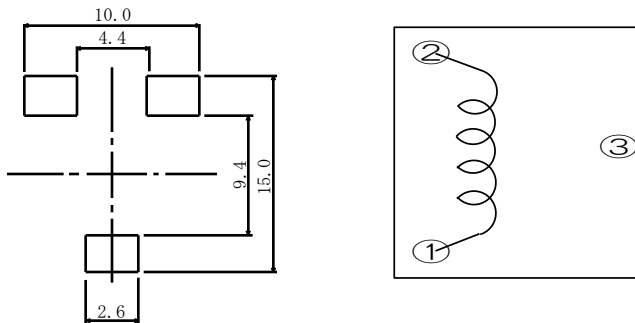



### Electrical Characteristics

#### Electrical Characteristics - 1

PART NO.	STAMP	INDUCTANCE [WITHIN] ※1	D.C.R. (mΩ) [MAX.] (Typ.) (at 20°C)	SATURATION CURRENT ( A ) ※2		TEMPERATURE RISE CURRENT ( A ) ※3 ΔT=40°C
				(at 20°C)	(at100°C)	
CDEP134NP-0R4NC	0R4N	0.4μH±30%	1.9(1.6)	32.0	27.0	18.5
CDEP134NP-0R9MC	0R9M	0.9μH±20%	2.5(2.1)	21.6	18.4	17.0
CDEP134NP-1R6MC	1R6M	1.6μH±20%	3.7(3.1)	16.0	13.8	15.0
CDEP134NP-2R5MC	2R5M	2.5μH±20%	6.6(5.5)	12.8	11.0	10.5
CDEP134NP-3R6MC	3R6M	3.6μH±20%	10.8(9.0)	10.9	9.1	8.0
CDEP134NP-4R8MC	4R8M	4.8μH±20%	12.0(10.0)	9.3	8.0	7.5
CDEP134NP-6R4MC	6R4M	6.4μH±20%	16.3(13.6)	8.0	6.8	7.0
CDEP134NP-8R0MC	8R0M	8.0μH±20%	18.4(15.3)	7.2	6.1	6.5

#### Electrical Characteristics - 2

PART NO.	STAMP	INDUCTANCE [WITHIN] ※1	D.C.R. (mΩ) [MAX.] (Typ.) (at 20°C)	SATURATION CURRENT ( A ) ※2		TEMPERATURE RISE CURRENT ( A ) ※3 ΔT=40°C
				(at 20°C)	(at100°C)	
CDEP134NP-0R3NC-H	0R3NH	0.3μH±30%	1.9(1.6)	35.0	32.0	18.5
CDEP134NP-0R6NC-H	0R6NH	0.66μH±30%	2.5(2.1)	29.0	24.0	17.0
CDEP134NP-1R2MC-H	1R2MH	1.2μH±20%	3.7(3.1)	21.0	17.6	15.0
CDEP134NP-1R8MC-H	1R8MH	1.8μH±20%	6.6(5.5)	17.6	14.4	10.5
CDEP134NP-2R7MC-H	2R7MH	2.7μH±20%	10.8(9.0)	14.7	12.0	8.0
CDEP134NP-3R6MC-H	3R6MH	3.6μH±20%	12.0(10.0)	12.5	10.2	7.5
CDEP134NP-4R8MC-H	4R8MH	4.8μH±20%	16.3(13.6)	11.0	9.0	7.0
CDEP134NP-6R0MC-H	6R0MH	6.0μH±20%	18.4(15.3)	9.6	8.0	6.5

※1. Measuring condition: at 100kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 65% (while the inductance tolerance is ±30%) or 75% (while the inductance tolerance is ±20%) of it's nominal.


※3. Temperature rise current: The value of D.C. current when the temperature rise is Δt=40°C (Ta=20°C).

# SMD Power Inductor CDEP134



## Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) —  $\Delta T$




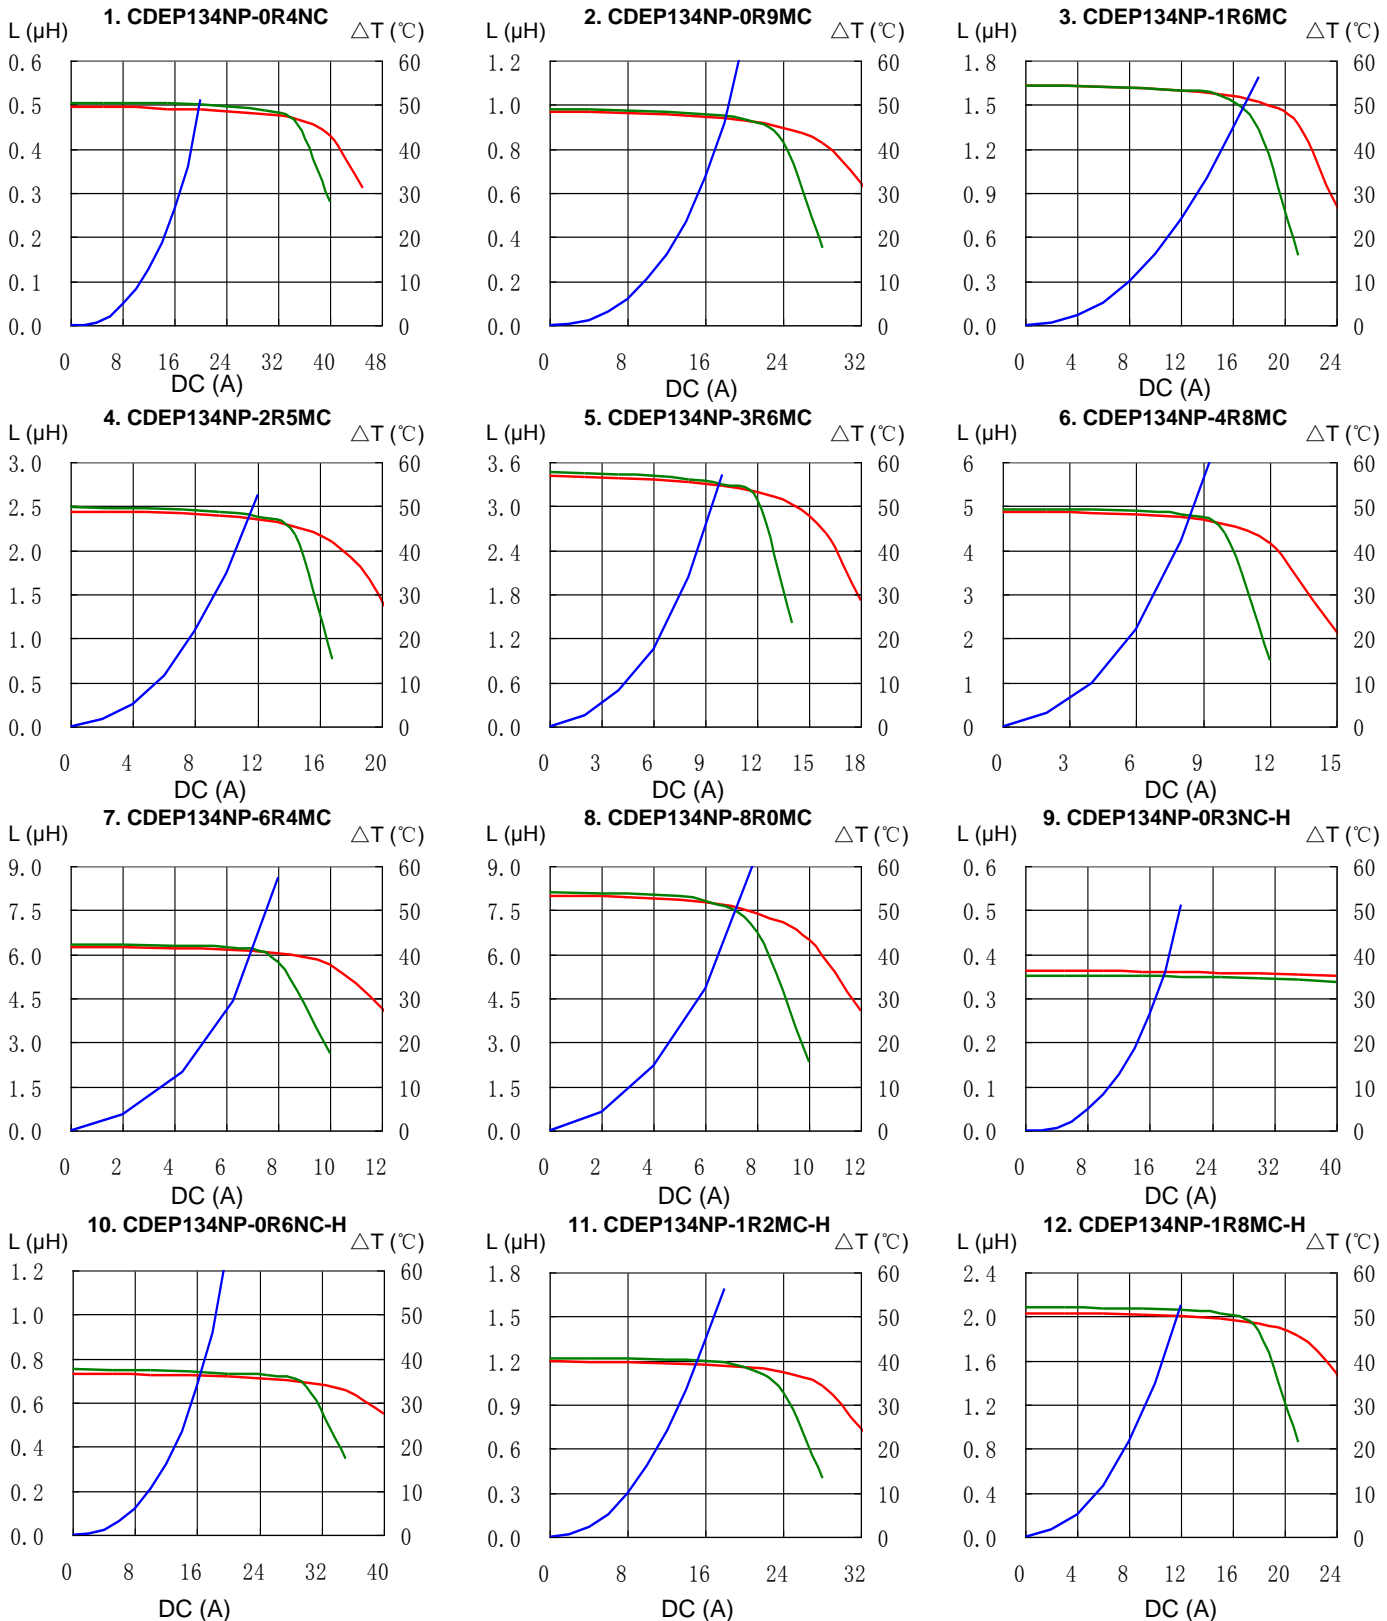


# SMD Power Inductor CDEP134




## Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) —  $\Delta T$

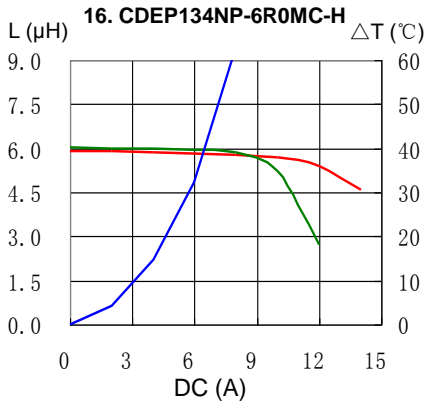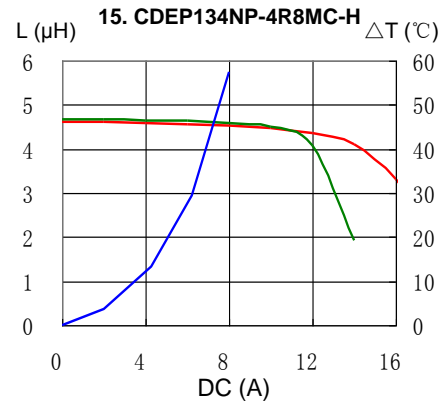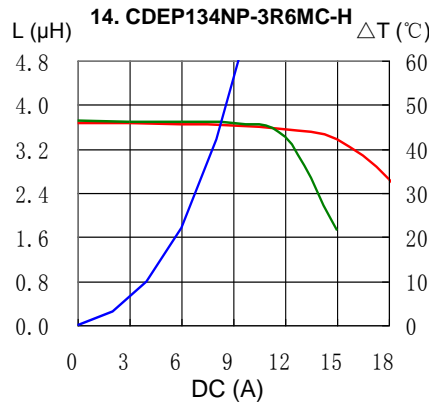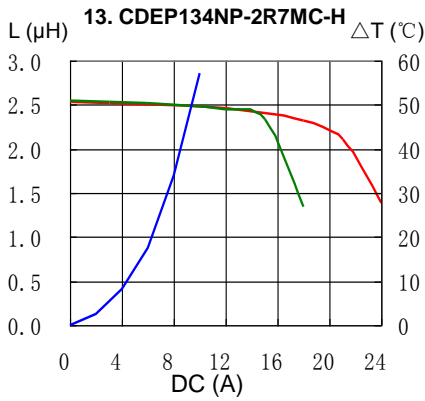


## Solder Reflow Condition

Heat Endurance

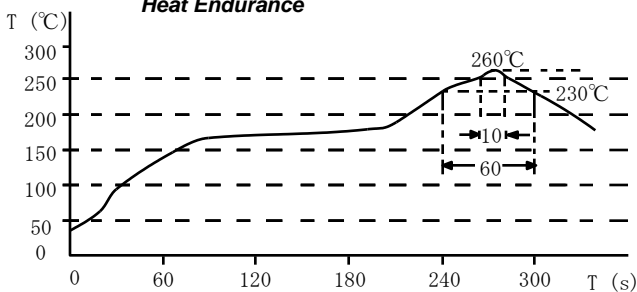

Temperature Chart

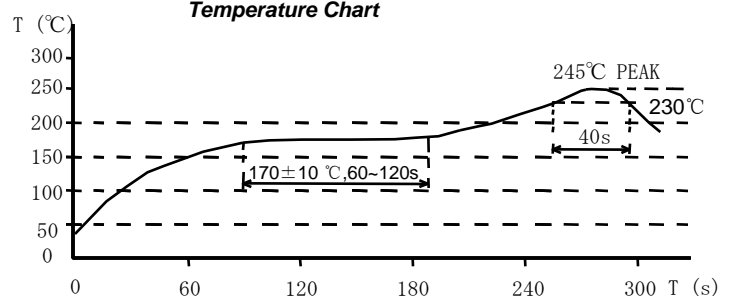

Please refer to the sales offices on our website - <http://www.sumida.com>

### Hong Kong

Tel.+852-2880-6781  
FAX.+852-2565-9600  
[sales@hk.sumida.com](mailto:sales@hk.sumida.com)

### Saitama(Japan)

Tel.+81-48-691-7300  
FAX.+81-48-691-7340  
[sales@jp.sumida.com](mailto:sales@jp.sumida.com)

### Chicago

Tel.+1-847-545-6700  
FAX. +1-847-545-6720  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

### Shanghai

Tel.+86-21-5836-3299  
FAX.+86-21-5836-3266  
[shanghai.sales@cn.sumida.com](mailto:shanghai.sales@cn.sumida.com)

### Seoul

Tel.+82-2-6237-0777  
FAX.+82-2-6237-0778  
[sales@kr.sumida.com](mailto:sales@kr.sumida.com)

### Obernzell

Tel.+49-8591-937-0  
FAX. +49-8591-937-103  
[contact@eu.sumida.com](mailto:contact@eu.sumida.com)

### Shenzhen

Tel.+86-755-8291-0228  
FAX.+86-755-8291-0338  
[shenzhen.sales@cn.sumida.com](mailto:shenzhen.sales@cn.sumida.com)

### Singapore

Tel.+65-6296-3388  
FAX.+65-6841-4426  
[sales@sg.sumida.com](mailto:sales@sg.sumida.com)

### Neumarkt

Tel.+49-9181-4509-110  
FAX. +49-9181-4509-310  
[infocomp@eu.sumida.com](mailto:infocomp@eu.sumida.com)

### Taipei

Tel.+886-2-8751-2737  
FAX.+886-2-8751-2738  
[sales@tw.sumida.com](mailto:sales@tw.sumida.com)

### San Jose







Tel.+1-408-321-9660  
FAX.+1-408-321-9308  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View CDEP134NP-1R8MC-H on WIN SOURCE](#)
-  [Sumida America Components Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management