




THE DATASHEET OF SSF2145CH6




Main Product Characteristics

$V_{(BR)DSS}$	20V	-20V
$R_{DS(ON)} (Typ.)$	38m Ω	68m Ω
I_D	4.8A	-2.9A



TSOP-6

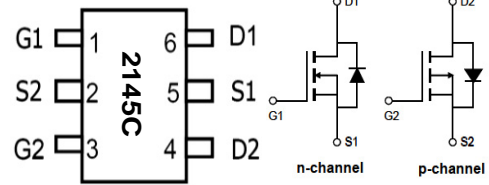

Marking and Pin Assignment

Schematic Diagram

Features and Benefits

- Advanced trench MOSFET process technology
- Designed for load switching and battery protection applications
- 150°C operating temperature



Description

The SSF2145CH6 utilizes the latest techniques to achieve high cell density and low on-resistance. These features make this device extremely efficient and reliable for use in high efficiency switch mode power supply and a wide variety of other applications.

Absolute Max Ratings

Symbol	Parameter	Max.		Unit
		N-channel	P-channel	
$I_D @ T_C = 25^\circ\text{C}$	Continuous Drain Current, $V_{GS} @ 4.5\text{V}^{(1)}$	4.8	-2.9	A
$I_D @ T_C = 100^\circ\text{C}$	Continuous Drain Current, $V_{GS} @ 4.5\text{V}^{(1)}$	3.9	-2.4	
I_{DM}	Pulsed Drain Current ⁽²⁾	17	-11	
$P_D @ T_C = 25^\circ\text{C}$	Power Dissipation ⁽³⁾	1.7	1.7	W
V_{DS}	Drain-Source Voltage	20	-20	V
V_{GS}	Gate-to-Source Voltage	± 8	± 8	V
T_J, T_{STG}	Operating Junction and Storage Temperature Range	-55 to + 150	-55 to + 150	$^\circ\text{C}$

Thermal Resistance

Symbol	Characteristics	Typ.	Max.		Unit
			N-channel	P-channel	
$R_{\theta JA}$	Junction-to-Ambient ($t \leq 10\text{s}$) ⁽⁴⁾	—	76	114	$^\circ\text{C/W}$
	Junction-to-Ambient (PCB mounted, steady-state) ⁽⁴⁾	—	53	53	$^\circ\text{C/W}$

Electrical Characteristics (T_A=25°C unless otherwise specified)

Symbol	Parameter		Min.	Typ.	Max.	Unit	Conditions
V _{(BR)DSS}	Drain-to-Source Breakdown Voltage	N-Channel	20	—	—	V	V _{GS} = 0V, I _D = 250μA
			22	—	—		T _J = 125°C
		P-Channel	-20	—	—		V _{GS} = 0V, I _D = -250μA
			-22	—	—		T _J = 125°C
R _{DS(ON)}	Static Drain-to-Source On-Resistance	N-Channel	—	38	55	mΩ	V _{GS} =4.5V, I _D = 3.6A
		P-Channel	—	68	80		V _{GS} =-4.5V, I _D = -3A
		N-Channel	—	64	75		V _{GS} =2.5V, I _D = 3.1A
		P-Channel	—	89	100		V _{GS} =-3.5V, I _D = -2A
		N-Channel	—	55	63		V _{GS} =1.8V, I _D = 2A
		P-Channel	—	129	148		V _{GS} =-1.8V, I _D = -1A
V _{GS(th)}	Gate Threshold Voltage	N-Channel	0.4	0.72	1	V	V _{DS} = V _{GS} , I _D = 250μA
		P-Channel	-0.4	-0.56	-1		T _J = 125°C
		N-Channel	0.4	0.78	1		V _{DS} = V _{GS} , I _D = -250μA
		P-Channel	-0.4	-0.66	-1		T _J = 125°C
I _{DSS}	Drain-to-Source Leakage Current	N-Channel	—	—	1	μA	V _{DS} = 20V, V _{GS} = 0V
		P-Channel	—	—	-1		V _{DS} = -20V, V _{GS} = 0V
I _{GSS}	Gate-to-Source Forward Leakage	N-Channel	—	—	100	nA	V _{GS} = 8V
		N-Channel	—	—	100		V _{GS} = -8V
		P-Channel	—	—	-100		V _{GS} = 8V
		P-Channel	—	—	-100		V _{GS} = -8V
C _{iss}	Input Capacitance	N-Channel	—	348	420	pF	V _{GS} = 0V, V _{DS} = 10V, f = 1.0MHz
C _{oss}	Output Capacitance	N-Channel	—	58	70		
C _{rss}	Reverse Transfer Capacitance	N-Channel	—	32	39		
C _{iss}	Input Capacitance	P-Channel	—	519	622		V _{GS} = 0V, V _{DS} = -10V, f = 1.0MHz
C _{oss}	Output Capacitance	P-Channel	—	75	90		
C _{rss}	Reverse Transfer Capacitance	P-Channel	—	58	70		
t _{d(on)}	Turn-On Delay Time	N-Channel	—	5	12		
t _r	Rise Time	N-Channel	—	10	30		
t _{d(off)}	Turn-Off Delay Time	N-Channel	—	10	30		
t _f	Fall Time	N-Channel	—	7	28		
t _{d(on)}	Turn-On Delay Time	P-Channel	—	13.6	27.2	nS	V _{DD} =-10V, I _D =-3A V _{GS} =-4.5V, R _{GEN} =3Ω
t _r	Rise Time	P-Channel	—	8.6	17.2		
t _{d(off)}	Turn-Off Delay Time	P-Channel	—	73.6	147.2		
t _f	Fall Time	P-Channel	—	34.6	69.2		



Source-Drain Ratings and Characteristics

Symbol	Parameter		Min.	Typ.	Max.	Unit	Conditions
I _S	Continuous Source Current (Body Diode)	N-Channel	—	—	4.8	A	MOSFET symbol showing the integral reverse p-n junction diode.
		P-Channel	—	—	-2.9		
I _{SM}	Pulsed Source Current (Body Diode)	N-Channel	—	—	17	A	
		P-Channel	—	—	-11		
V _{SD}	Diode Forward Voltage	N-Channel	—	0.69	1.2	V	I _S =0.94A, V _{GS} =0V
		P-Channel	—	-0.72	-1.2		I _S =-0.75A, V _{GS} =0V

Notes:

1. The maximum current rating is limited by bond-wires.
2. Repetitive rating; pulse width limited by max. junction temperature.
3. The power dissipation P_D is based on max. junction temperature, using junction-to-ambient thermal resistance.
4. The value of R_{θJA} is measured with the device mounted on 1 in² FR-4 board with 2oz. Copper, in a still air environment with T_A=25°C

Typical Electrical and Thermal Characteristics

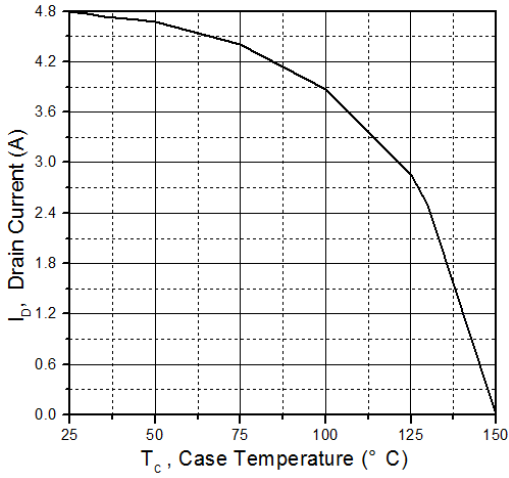


Figure 1. Maximum Drain Current Vs. Case Temperature (N-Channel)

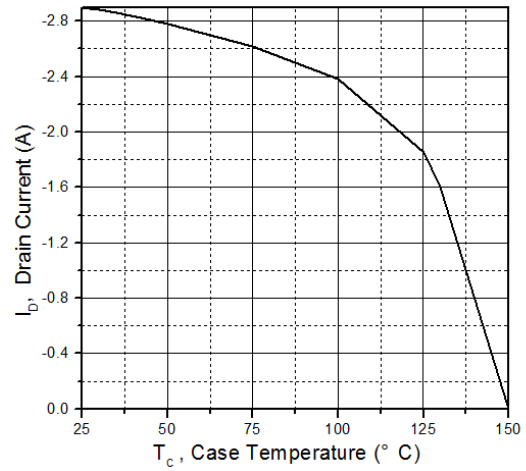


Figure 2. Maximum Drain Current Vs. Case Temperature (P-Channel)

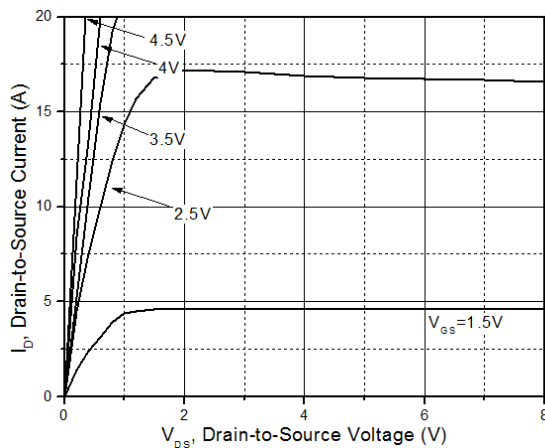


Figure 3. Typical Output Characteristics (N-Channel)

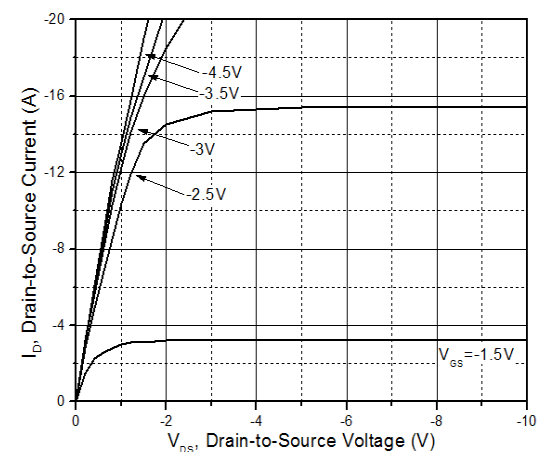


Figure 4. Typical Output Characteristics (P-Channel)

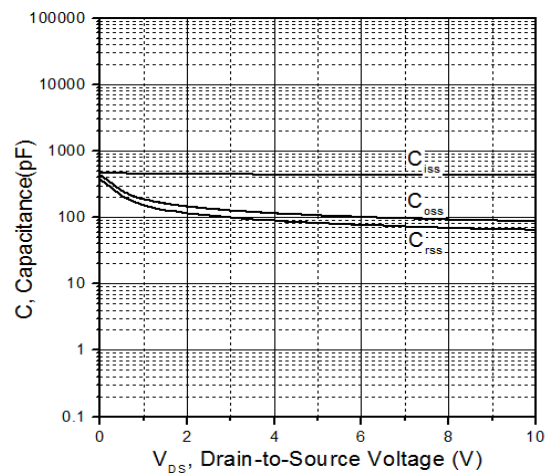


Figure 5. Typical Capacitance Vs. Drain-to-Source Voltage (N-Channel)


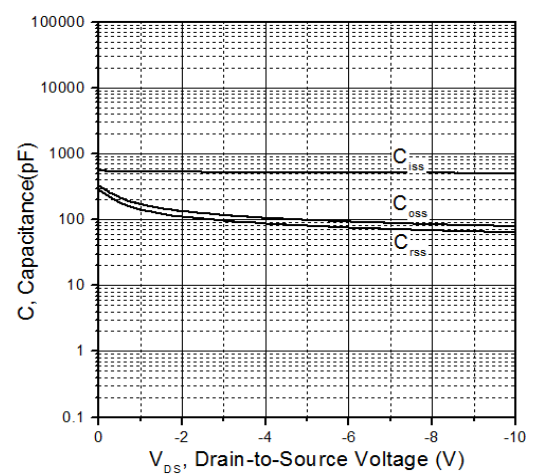


Figure 6. Typical Capacitance Vs. Drain-to-Source Voltage (P-Channel)

Mechanical Data: TSOP-6

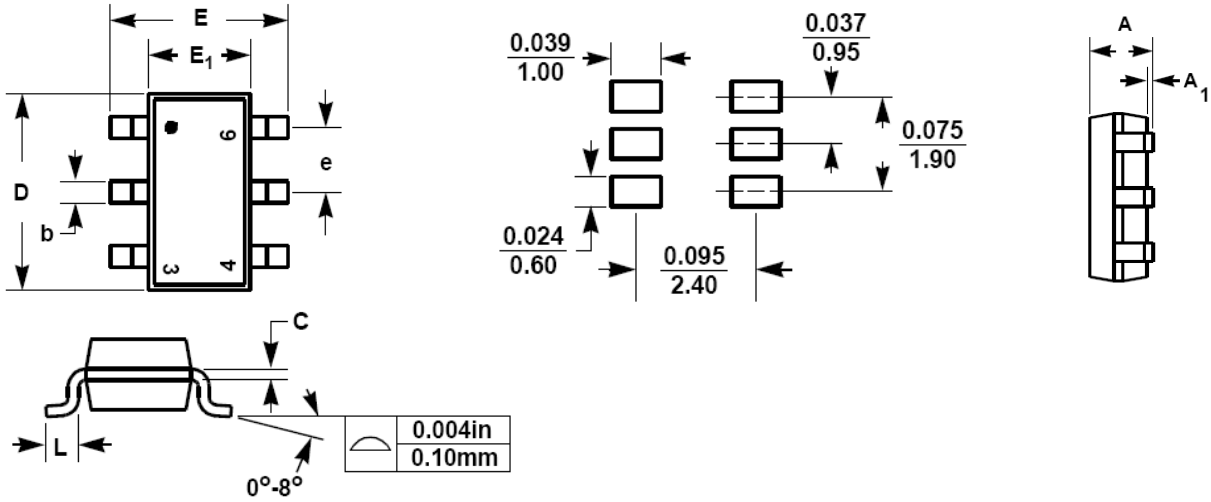

SYMBOL	Millimeters	
	MIN	MAX
A	0.90	1.30
A1	0.10	
b	0.30	0.50
c	0.08	0.20
D	2.80	3.10
E	2.60	3.00
E1	1.50	1.70
e	0.95 BSC	
L	0.35	0.55

Notes:



1. Dimensions are inclusive of plating
2. Package body sizes exclude mold flash and gate burrs. Mold flash at the non-lead sides should be less than 6 mils
3. Dimension L is measured in gauge plane.
4. Controlling dimension is millimeter, converted inch dimensions are not necessarily exact.

Order Information

Device	Package	Marking	Carrier	Quantity
SSF2145CH6	TSOP-6	2145C	Tape & Reel	3,000pcs / Reel

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View SSF2145CH6 on WIN SOURCE](#)
-  [GOOD-ARK Electronics](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management