




**THE DATASHEET OF
DK-1611-007/WH**



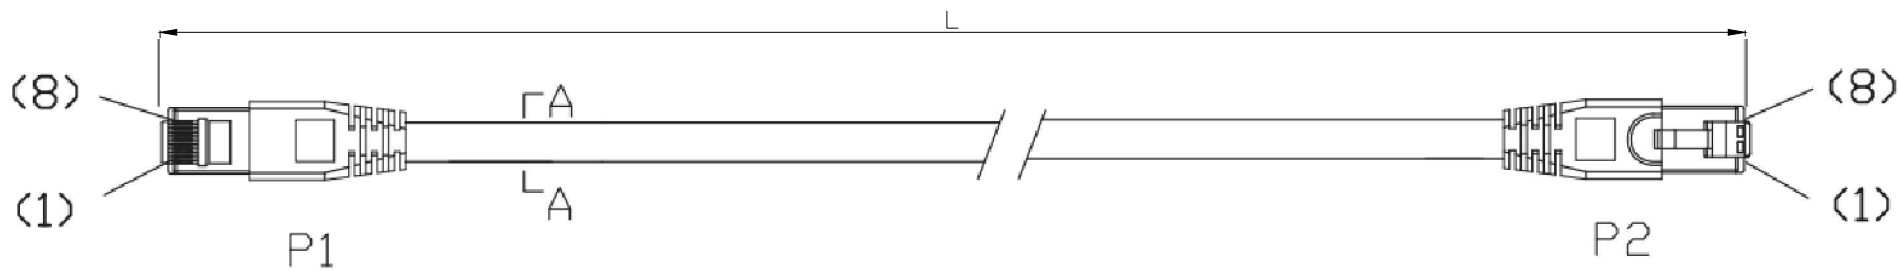

TOLERANCE

Length-ft	max-ft	min-ft
1	0.10	0.05
3	0.15	0.12
5	0.15	0.15
7	0.21	0.21
10	0.3	0.3
15	0.45	0.45
20	0.6	0.6
25	0.75	0.75
50	1.5	1.5
100	3	3


Material:

- Conductor: 24AWG 7*0.19±0.015mm
- Conductor Insulation color coding: (1) White/Orange, (1) Orange, (1) White/Green, (1) Green, (1) Blue, (1) White/Blue, (1) White/Brown, (1) Brown
- Cable jacket printing: DIGITUS Cat6 U-UTP PATCH CORD ISO/IEC 11801 & TIA/EIA 568-B.2-1 24AWGx4p CM(UL) C(UL)
- Wiring T568B Color
- P1 & P2 Contact plug: RJ45 8P8C 3μ pc UL 94V-2
- Cable tie: White
- Cable jacket color: Black, White, Blue, or Grey
- Dielectric strength: 2.5KV dc-2seconds
- Working temperatures: -20°C ~ +60°C


PIN OUT

P1	WIRE COLOR	P2
1	ORANGE/WHITE	1
2	ORANGE	2
3	GREEN/WHITE	3
6	GREEN	6
4	BLUE	4
5	BLUE/WHITE	5
7	BROWN/WHITE	7
8	BROWN	8

PACKING



RoHS compliant
Unit: mm

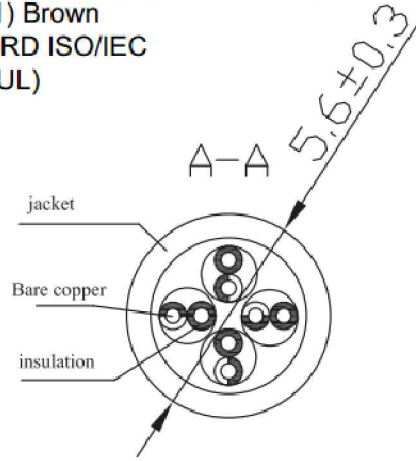

Order Code: DK-1611-xxx/x
Order lengths in feet: 1,3,5,7,10,15, 20,25,50,100
Cable Jacket colors: Black(BL), White(WH), Blue(B), Green(GR), or Grey(G)

Scale	FREE					Date	Name	
TOLERANCE						Drawn	15.12.2015	Joanna
						Approved	15.12.2015	Joanna
DIM	TOL							
		①	Drawn	15.12.2015	Joanna			
Angle	TOL	Id.	Modification	Date	Name			

Customer-No.	
ASSMANN WSW-No. DK-1611-XXX/X	
Drawing-No.	
ASS 7510 CA	rev00
Replace	Sheet