



**THE DATASHEET OF
RTP200HR010SA**





High Current Reflowable Thermal Protection Device

PRODUCT: RTP200HR010SA

DOCUMENT: SCD28246
REV LETTER: B
REV DATE: JANUARY 16, 2014
PAGE NO.: 1 OF 5

Specification Status: Released

PIN CONFIGURATION AND DESCRIPTION:

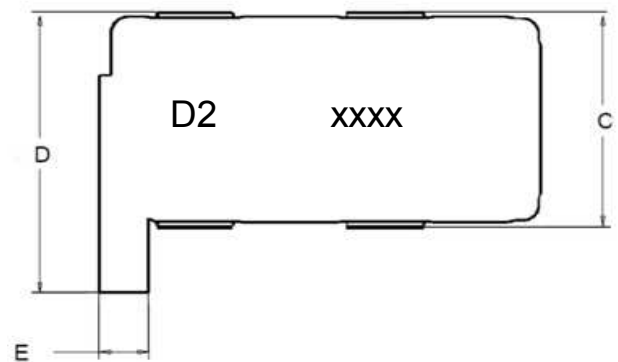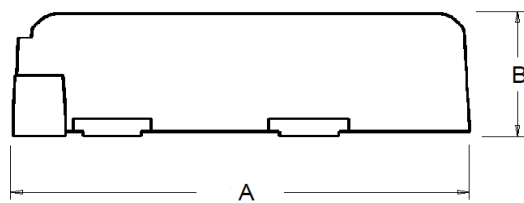

Note: D2 is product code
xxxx is Batch code

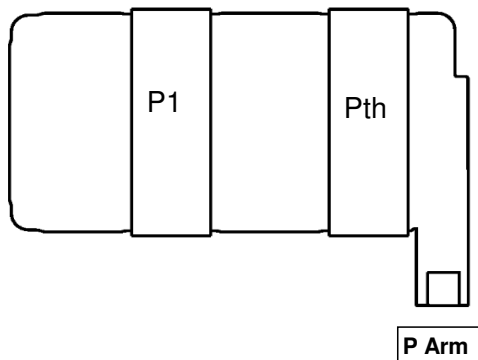


TABLE 1. DIMENSIONS:

	A		B		C		D		E	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm	11.35	11.85	3.00	3.70	5.70	6.40	7.90	8.40	1.30	1.60
in:	(0.447)	(0.467)	(0.118)	(0.146)	(0.224)	(0.252)	(0.311)	(0.331)	(0.051)	(0.063)

High Current Reflowable Thermal Protection Device

PRODUCT: RTP200HR010SA

DOCUMENT: SCD28246
REV LETTER: B
REV DATE: JANUARY 16, 2014
PAGE NO.: 2 OF 5

TABLE 2. ABSOLUTE MAX RATINGS:

Absolute Max Ratings	Max	Units	Conditions
Max DC Open Voltage ¹	16	V _{DC}	
Max DC Interrupt Current ¹	500	A	@ 16 VDC
ESD rating (Human Body Model)	25	KV	
Max Reflow Temperature (pre-arming)	260	°C	
Operating temperature limits, Junction (Pth) and Storage Temperature	-55 150	°C	
	175	°C	10A, 100 h

- Performance capability at these conditions can be influenced by board design. Performance should be verified in the user's system.

TABLE 3. PERFORMANCE CHARACTERISTICS (Typical unless otherwise specified):

Resistance and Open Characteristics P ₁ to P _{TH}		Min	Typ	Max	Units
R _{PP} (Resistance from P ₁ to P _{TH})	@ 23+/-3°C @ 150+/-3°C		100 150	150 250	μΩ
Operating Voltage			16		V _{DC}
Open Temperature, post-arming	I _{PP} = 0	202	210	218	°C
Installation dependent Operating Current, post-arming ²	@ 23+/-3°C	90			A
	@ 140+/-3°C	45			
Moisture Sensitivity Level Rating ³			1		

- Results obtained on 44.4mm x 57.2mm x 1.6mm of 2-sided FR4 board T4350 with 4.0 oz Copper trace. RTP device pad connection of:
 - 283 sq. mm 4.0 oz copper heat spreader connected to I P1 pad.
 - 237 sq. mm 4.0 oz copper heat spreader connected to I PTH pad.
 Results are highly installation-dependent. Users should confirm for their own applications.

- As per JEDEC J-STD-020C

High Current Reflowable Thermal Protection Device

PRODUCT: RTP200HR010SA

DOCUMENT: SCD28246
REV LETTER: B
REV DATE: JANUARY 16, 2014
PAGE NO.: 3 OF 5

TABLE 4. ARMING CHARACTERISTICS:

Arming Characteristics ARM		Min	Typ	Max	Units
Arming Type		Electronically Armed			
R _{ARM} (Resistance from ARM to P ₁ or P _{TH})	Pre-Arming		500		mΩ
	Post-Arming	10			KΩ
Arming Current (I _{ARM}) ⁴		@ 23 +/-3°C	2	5	A
Arming Time (@23 +/-3°C) ⁴	@ 2A		0.020		Sec
	@ 5A		0.005		

4. Results obtained on 44.4mm x 57.2mm x 1.6mm of 2-sided FR4 board T4350 with 4.0 oz Copper trace.

RTP device pad connection of:

- 283 sq. mm 4.0 oz copper heat spreader connected to I P1 pad.
- 237 sq. mm 4.0 oz copper heat spreader connected to I PTH pad.

Solder Reflow Recommendation:

Classification Reflow Profiles

Profile Feature **Pb-Free Assembly**

Average ramp up rate (T_SMAX to T_p) 3°C/second max.

Preheat

- Temperature min. (T_SMIN) 150°C
- Temperature max. (T_SMAX) 200°C
- Time (t_SMIN to t_SMAX) 60-180 seconds

Time maintained above:

- Temperature (T_L) 217°C
- Time (t_L) 60-150 seconds

Peak/Classification temperature (T_p) 260°C


Time within 5°C of actual peak temperature

Time (t_p) 20-40 seconds

Ramp down rate 6°C/second max.

Time 25°C to peak temperature 8 minutes max.

Note: All temperatures refer to topside of the package, measured on the package body surface.

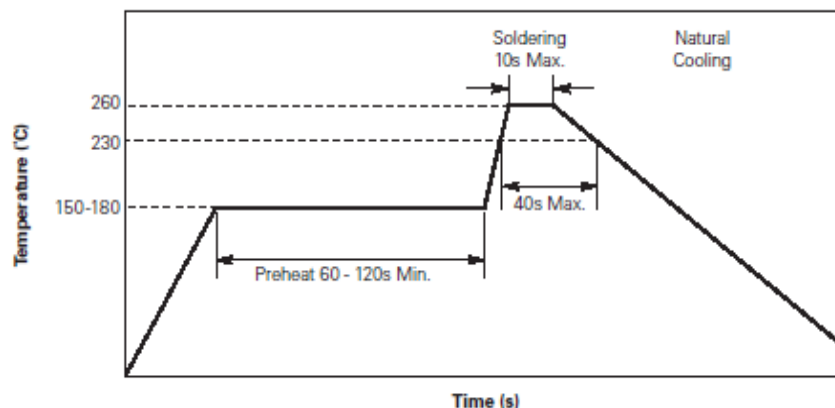


High Current Reflowable Thermal Protection Device


PRODUCT: RTP200HR010SA

DOCUMENT: SCD28246
REV LETTER: B
REV DATE: JANUARY 16, 2014
PAGE NO.: 4 OF 5

Recommended Pad Layout (dimensions in mm):

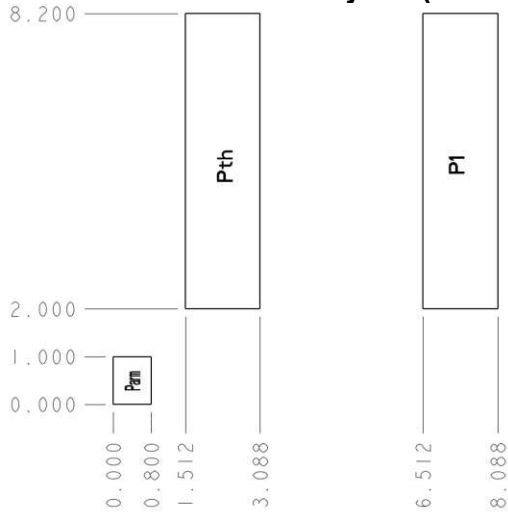

Package Information (dimensions are in mm):

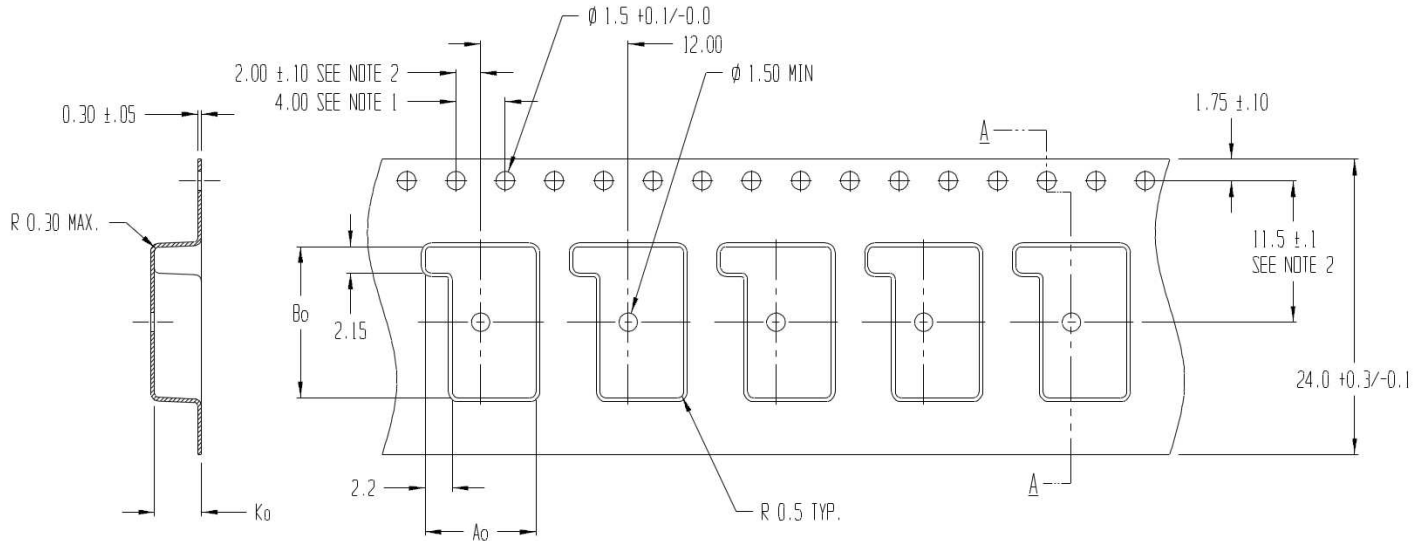


SECTION A - A

A₀ = 9.00
B₀ = 12.30
K₀ = 3.80

High Current Reflowable Thermal Protection Device

PRODUCT: RTP200HR010SA

DOCUMENT: SCD28246
REV LETTER: B
REV DATE: JANUARY 16, 2014
PAGE NO.: 5 OF 5

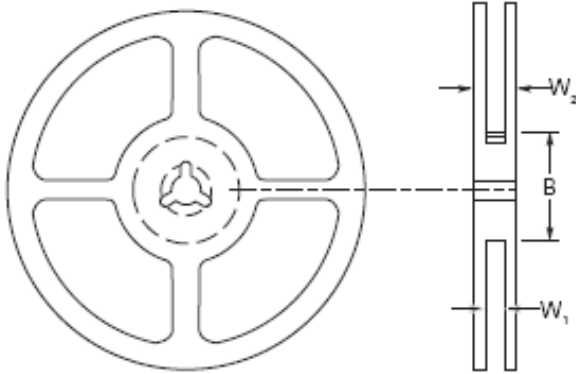

	B	W₁	W₂ Max
mm	102.0 ± 2.0	24	29
(inch)	(4.0 ± 0.079)	(0.945)	(1.14)

Precedence: This specification takes precedence over documents referenced herein.
Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.

Important Installation Instructions:

Note 1: RTP200HR010SA devices are to be board-mounted using only solder pastes referenced in Engineering Report: Q40213
Note 2: RTP200HR010SA devices are not compatible with conformal coating. If selective coatings are used, avoid covering the RTP200HR010SA device.

MATERIALS INFORMATION

RoHS Compliant

Directive 2002/95/EC
Compliant

ELV Compliant

Directive 2000/53/EC
Compliant

Pb-Free



Halogen Free*



* Halogen Free refers to: Br≤900ppm, Cl≤900ppm, Br+Cl≤1500ppm.

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Tyco Electronics Corporation and its affiliates in the TE Connectivity Ltd. group of companies ("TE") reserves the right to change or update, without notice, any information contained in this publication; to change, without notice, the design, construction, processing, or specification of any product; and to discontinue or limit production or distribution of any product. This publication supersedes and replaces all information previously supplied. Without express written consent by an officer of TE, TE does not authorize the use of any of its products as components in nuclear facility applications, aerospace, or in critical life support devices or systems. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. TE's only obligations are those in the TE Standard Terms and Conditions of Sale and in no case will TE be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of its products.