THE DATASHEET OF


MA4E1318

GaAs Flip Chip
Schottky Barrier Diodes


MA4Exxxx Series
Rev. V14

Features


- Low Series Resistance
- Low Capacitance
- High Cutoff Frequency
- Silicon Nitride Passivation
- Polyimide Scratch Protection
- Designed for Easy Circuit Insertion




MA4E1317



MA4E1318



MA4E1319 -1



MA4E2160

Description and Applications

The MA4E1317 single, MA4E1318 anti-parallel pair, MA4E1319-1 reverse tee and MA4E2160 unconnected anti-parallel pair are gallium arsenide flip chip Schottky barrier diodes.

These devices are fabricated on OMCVD epitaxial wafers using a process designed for high device uniformity and extremely low parasitics. The diodes are fully passivated with silicon nitride and have an additional layer of polyimide for scratch protection. The protective coatings prevent damage to the junction during automated or manual handling. The flip chip configuration is suitable for pick and place insertion. The high cutoff frequency of these diodes allows use through millimeter wave frequencies.

Typical applications include single and double balanced mixers in PCN transceivers and radios, police radar detectors, and automotive radar detectors. The devices can be used through 80 GHz.

The MA4E1318 anti-parallel pair is designed for use in sub harmonically pumped mixers. Close matching of the diode characteristics results in high LO suppression at the RF input.

Ordering Information

Part Number	Package
MA4E1317 MA4E1318 MA4E1319-1 MA4E2160	100 piece Gel Pack
MADS-001317-1278HP MADS-001318-1197HP	3000 piece Reel

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.

For further information and support please visit:
https://www.macom.com/support

Electrical Specifications @ +25°C

Parameters and Test Conditions	Symbol	Units	MA4E1317			MA4E1318		
			Min.	Typ.	Max.	Min.	Typ.	Max.
Junction Capacitance @ 0 V, 1 MHz	C_J	pF	-	.020	-	-	.020[3]	-
Total Capacitance @ 0 V, 1 MHz[1]	C_T	pF	.030	.045	.060	.030[3]	.045[3]	.060[3]
Junction Capacitance Difference	DC_J	pF	-	-	-	-	-	-
Series Resistance @ +10 mA[2]	R_S	Ω	-	4	7	-	4	7
Forward Voltage @+1 mA	V_F1	V	.60	.70	.80	.60	.70	.80
Forward Voltage Difference @ +1 mA	DV_F	V	-	-	-	-	.005	.010
Reverse Breakdown Voltage @ -10 µA	V_{BR}	V	4.5	7.0	-	-	-	-
SSB Noise Figure	NF	dB	-	6.5[4]	-	-	6.5[4]	-

Parameters and Test Conditions	Symbol	Units	MA4E1319-1			MA4E2160		
			Min.	Typ.	Max.	Min.	Typ.	Max.
Junction Capacitance at 0 V at 1 MHz	C_J	pF	-	.020[3]	-	-	.020[3]	-
Total Capacitance at 0 V at 1 MHz[1]	C_T	pF	.030[3]	.045[3]	.060[3]	.030[3]	.045[3]	.060[3]
Junction Capacitance Difference	DC_J	pF	-	.005	.010	-	.005	.010
Series Resistance at +10 mA[2]	R_S	Ω	-	4	7	-	4	7
Forward Voltage at +1 mA	V_F1	V	.60	.70	.80	.60	.70	.80
Forward Voltage Difference at +1 mA	DV_F	V	-	.005	.010	-	.005	.010
Reverse Breakdown Voltage at -10 µA	V_{BR}	V	4.5	7.0	-	4.5	7.0	-
SSB Noise Figure	NF	dB	-	6.5[4]	-	-	6.5[4]	-

1. Total capacitance is equivalent to the sum of junction capacitance and parasitic capacitance.
2. Series resistance is determined by measuring the dynamic resistance and subtracting the junction resistance of 2.6 Ω.
3. Capacitance for the MA4E1318, MA4E2160 and MA4E1319-1 is per Schottky diode.
4. Measured at a LO frequency of 9.375 GHz, with an IF frequency of 300 MHz, LO drive level is +6 dBm for a single Schottky junction. The IF noise figure contribution (1.5 dB) is included.

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.


For further information and support please visit:
https://www.macom.com/support

Absolute Maximum Ratings[5,6]

Parameter	Absolute Maximum
Operating Temperature	-65°C to +125°C
Storage Temperature	-65°C to +150°C
Incident LO Power	+20 dBm
Incident RF Power	+20 dBm
Mounting Temperature	+235°C for 10 seconds

5. Exceeding any one or combination of these limits may cause permanent damage to this device.
6. MACOM does not recommend sustained operation near these survivability limits.

Forward Current vs. Temperature

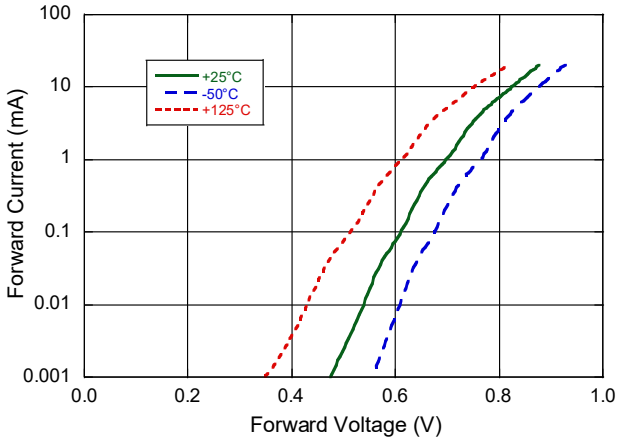

Mounting Techniques

These chips were designed to be inserted onto hard or soft substrates with the junction side down. They can be mounted with conductive epoxy or with a low temperature solder preform. The die can also be assembled with the junction side up, and wire or ribbon bonds made to the pads.

Solder Die Attach:

Solder which does not scavenge gold, such as Indalloy # 2, is recommended. Sn-Pb based solders are not recommended due to solder embrittlement. Do not expose die to a temperature >235°C, or >200°C for longer than 10 seconds. No more than 3 seconds of scrubbing should be required for attachment.

Epoxy Die Attach:

Assembly can be preheated to 125 - 150°C. Use a minimum amount of epoxy. Cure epoxy as per manufacturer's schedule. For extended cure times, temperatures should be kept below 200°C.

Handling Procedures

The following precautions should be observed to avoid damaging these chips:

Cleanliness:

The chips should be handled in a clean environment. Do not attempt to clean die after installation.

Static Sensitivity:

Schottky barrier diodes are ESD sensitive and can be damaged by static electricity. Proper ESD techniques should be used when handling these Class 0 devices.


General Handling:

The protective polymer coating on the active areas of these die provides scratch protection, particularly for the metal air bridge which contacts the anode. Die can be handled with tweezers or vacuum pickups and are suitable for use with automatic pick-and-place equipment.

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.

For further information and support please visit:
https://www.macom.com/support


Flip Chip Outline Drawings

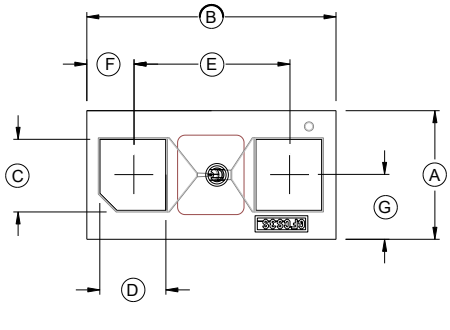


MA4E1317
Case Style 1278



DIM.	INCHES		MILLIMETERS	
	MIN.	MAX.	MIN.	MAX.
A	0.013	0.014	0.330	0.335
B	0.026	0.027	0.660	0.685
C	0.008	0.009	0.203	0.228
D	0.007	0.008	0.177	0.203
E	0.016	0.017	0.406	0.430
F	0.004	0.006	0.101	0.152
G	0.006	0.007	0.152	0.177
H	0.0075	0.0085	0.190	0.216

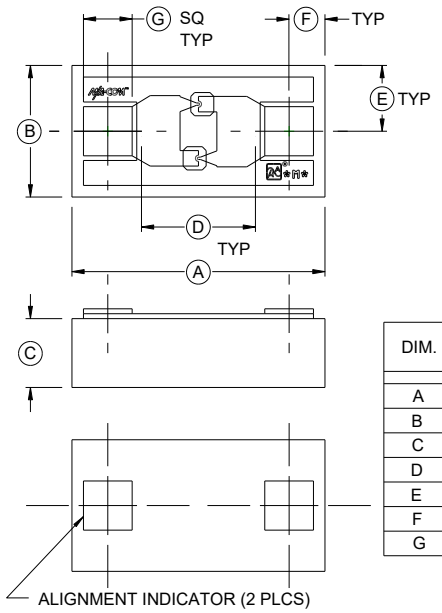

MA4E1318
Case Style 1197




DIM.	INCHES		MILLIMETERS	
	MIN.	MAX.	MIN.	MAX.
A	.025	.027	.64	.69
B	.012	.015	.32	.37
C	.006	.008	.15	.20
D	.018	.020	.45	.50
E	.0075	.0085	.190	.216
F	.003	.005	.08	.13
G	.004	.006	.10	.15

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.

For further information and support please visit:
https://www.macom.com/support

Flip Chip Outline Drawings

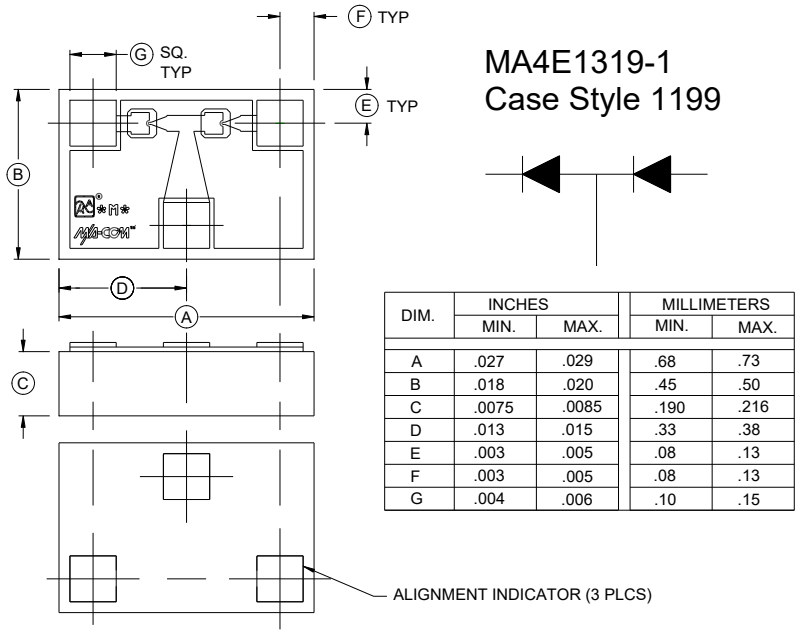


MA4E1319-1
Case Style 1199

DIM.	INCHES		MILLIMETERS	
	MIN.	MAX.	MIN.	MAX.
A	.027	.029	.68	.73
B	.018	.020	.45	.50
C	.0075	.0085	.190	.216
D	.013	.015	.33	.38
E	.003	.005	.08	.13
F	.003	.005	.08	.13
G	.004	.006	.10	.15

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.

For further information and support please visit:
https://www.macom.com/support

Flip Chip Outline Drawings

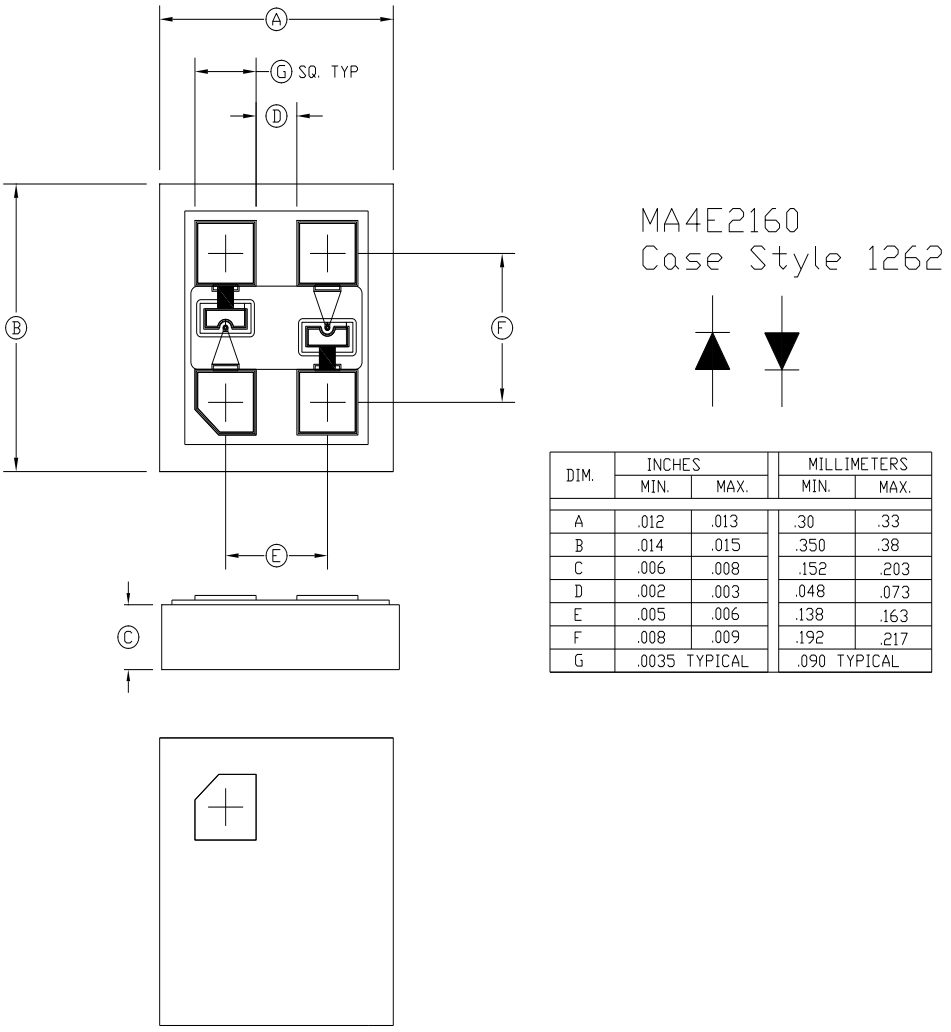

DIM.	INCHES		MILLIMETERS	
	MIN.	MAX.	MIN.	MAX.
A	.012	.013	.30	.33
B	.014	.015	.350	.38
C	.006	.008	.152	.203
D	.002	.003	.048	.073
E	.005	.006	.138	.163
F	.008	.009	.192	.217
G	.0035 TYPICAL		.090 TYPICAL	

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.
Visit www.macom.com for additional data sheets and product information.

For further information and support please visit:
https://www.macom.com/support

MACOM Technology Solutions Inc. (“MACOM”). All rights reserved.
These materials are provided in connection with MACOM’s products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- View MA4E1318 on WIN SOURCE
- M/A-Com Technology Solutions Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- Global Sourcing Solution
- Obsolete Management
- Cost Control Management
- Shortage Management
- Alternative Solution
- Excess Inventory Management