



THE DATASHEET OF

512810694

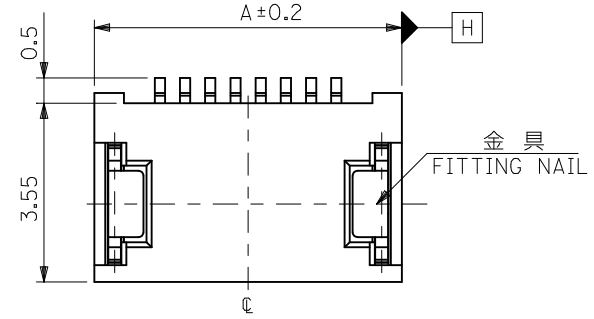


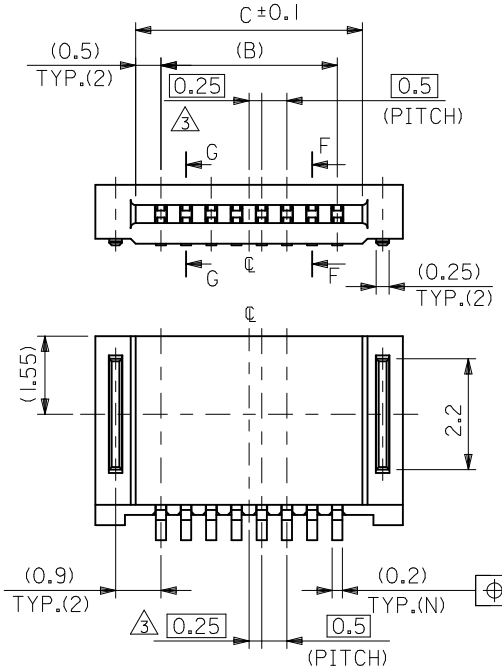




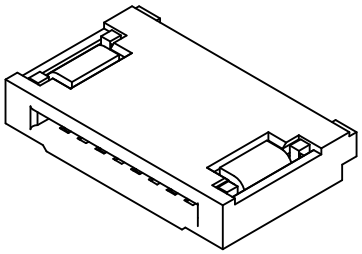

ISO VIEW（参考）

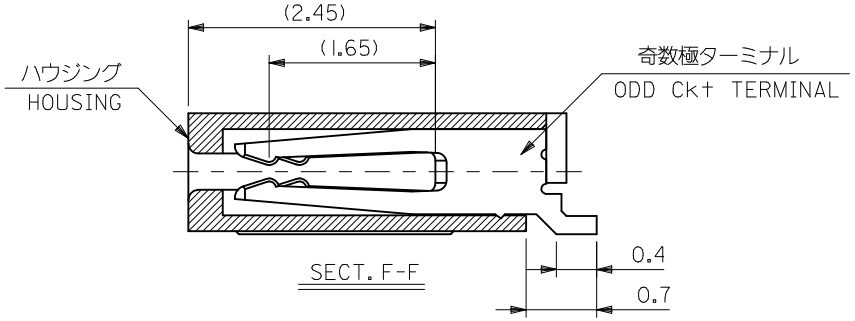

SECT. F-F

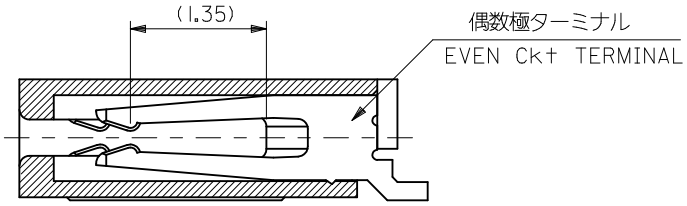

SECT. G-G

13.5	12.5	15.1	51281-2694	26
12.5	11.5	14.1	51281-2494	24
11.5	10.5	13.1	51281-2294	22
10.5	9.5	12.1	51281-2094	20
9.5	8.5	11.1	51281-1894	18
8.5	7.5	10.1	51281-1694	16
7.5	6.5	9.1	51281-1494	14
6.5	5.5	8.1	51281-1294	12
6.0	5.0	7.6	51281-1194	11
5.5	4.5	7.1	51281-1094	10
5.0	4.0	6.6	51281-0994	9
4.5	3.5	6.1	51281-0894	8
4.0	3.0	5.6	51281-0794	7
3.5	2.5	5.1	51281-0694	6
3.0	2.0	4.6	51281-0594	5
C	B	A	EMBOSSED TAPE ORDER No. オーダー番号	CIRCUIT

CONNECTOR SERIES NO. : 51281-**40

REVISED
EC NO: J2011-0538 2010/10/12
DRWN:TONO 2010/10/12
CH'KD:HIIJIMA 2010/10/13
APPR:KMORIKAWA
DESCRIPTION
REV J


GENERAL TOLERANCES (UNLESS SPECIFIED)

10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGULAR	±3 °


DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE	MM ONLY
SCALE	---
DESIGN UNITS	METRIC
	THIRD ANGLE PROJECTION
DRAWN BY / DATE	KENSUZUKI 2004/10/19
CHECKED BY / DATE	NUKITA 2004/10/19
APPROVED BY / DATE	KMORIKAWA 2010/10/13
MATERIAL NO.	SEE TABLE
TITLE	0.5 FPC CONN NON-ZIF HSG ASSY (HGT=1.2MM)
	MOLEX INCORPORATED
DOCUMENT NO.	SD-51281-011
SHEET NO.	1 OF 2
SIZE	A3


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

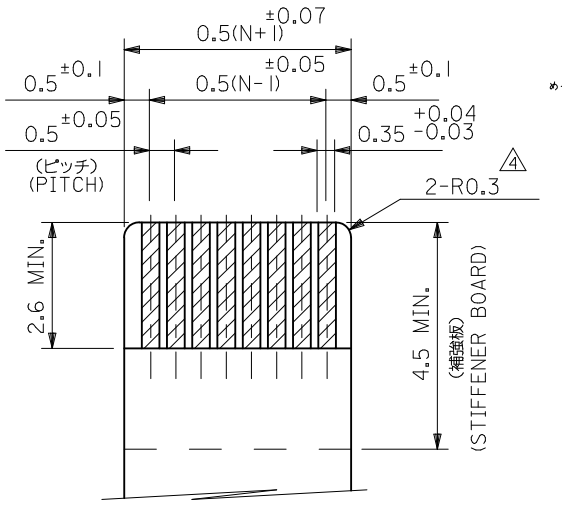


適合ＦＰＣ推奨寸法
APPLICABLE FPC
RECOMMENDED DIMENSION
（仕上がり厚さ：0.3±0.03）
(THICKNESS:0.3±0.03)

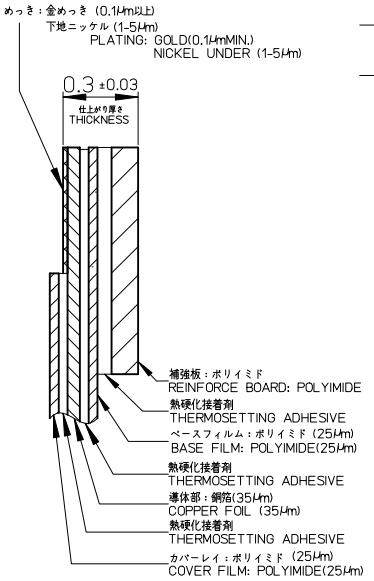

FPC構成推奨仕様
STRUCTURE OF FPC

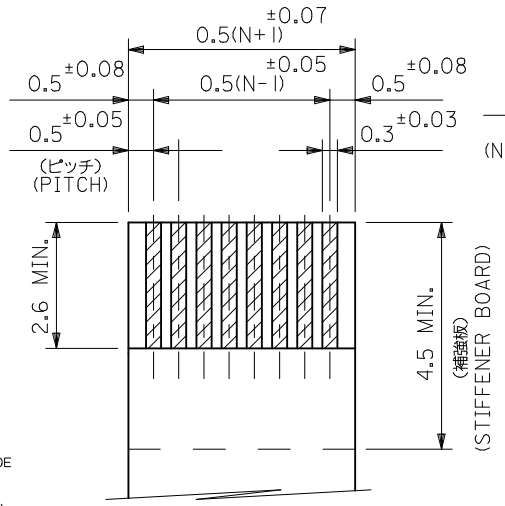

適合ＦＦＣ推奨寸法
APPLICABLE FFC
RECOMMENDED DIMENSION
（仕上がり厚さ：0.3±0.03）
(THICKNESS:0.3±0.03)

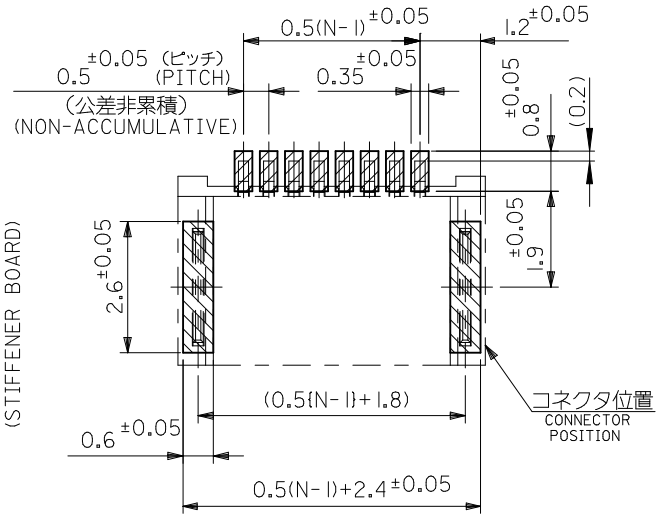

参考基板レイアウト図
RECOMMENDED P.C.BOARD LAYOUT
（マウント面）
(MOUNTING SIDE)

注記 NOTES

1. 使用材料 MATERIAL
ハウジング　：液晶ポリマー　ガラス充填　ＵＬ９４Ｖ－０
HOUSING : LIQUID CRYSTAL POLYMER (GRASS FILLED) UL94V-0
ターミナル　：リン青銅（ｔ＝０．２），ニッケル下地　コンタクト部：金メッキ　テール部：錫メッキ
TERMINAL : PHOSPHOR-BRONZE , TAIL : TIN　CONTACT : GOLD OVER NICKEL PLATING
金具　：　リン青銅（ｔ＝０．２５），ニッケル下地　純錫メッキ
FITTING NAIL : PHOSPHOR-BRONZE , PURE-TIN OVER NICKEL PLATING.

2. ソルダーテール半田付け面のズレ量、及び金具半田付け面のズレ量は、基準面 J に対し、上方向　０．１ＭＡＸＩＭＵＭ　下方向　０．１５ＭＡＸＩＭＵＭ　とする。
又、相互のバラツキ量は　０．１ＭＡＸＩＭＵＭ　とする。
MISALIGNMENT OF SOLDER TAILS AND FITTING NAILS FROM J
UPPER DIRECTION : 0.1 MAXIMUM , LOWER DIRECTION : 0.15 MAXIMUM.
OFFSET BETWEEN SOLDER TAILS AND FITTING NAILS : 0.1 MAXIMUM.

3. 偶数極に適用。
TO BE APPLIED ONLY WHEN ALL CIRCUIT ARE EVEN.

4. ＲＯ．３は、ＦＰＣの導体部にかからないこと。
RO.3 MUST NOT BE ERLAPPED TO PATTERN OF FPC.

5. ＦＰＣ／ＦＦＣについて：
打抜き方向は導体側から補強板側を推奨いたします。
導体部については軟銅箔35μｍまたは50μｍ
メッキ厚 0.1μm 以上 金メッキ（電気メッキ）
を推奨いたします。
RECOMMENDED PUNCHER DIRECTION :
FROM CONDUCTOR SIDE TO STIFFENER BOARD SIDE.
RECOMMENDED CONDUCTOR SPEC :
THICKNESS OF SOFT COPPER FOIL : 35 μm or 50 μm
GOLD PLATING : 0.1 μm MIN. (ELECTRICAL PLATING)

6. 本製品は５１２８１－＊＊２０の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 51281-**20.

7. ソルダーテールの平坦度は、0.1 MAXIMUM とする。
SOLDER TAIL COPLANARITY IS 0.1 MAXIMUM.

8. ELV 及び RoHS 適合品.
ELV AND RoHS COMPLIANT.

REVISED
EC NO: J2011-0538
DRWN:TONO 2010/10/12
CHKD:HIJIMA 2010/10/12
APPR:KMORIKAWA 2010/10/13
DESCRIPTION
REV: J


GENERAL TOLERANCES (UNLESS SPECIFIED)


10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGULAR	±3 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE	MM ONLY
SCALE	---
DESIGN UNITS	METRIC
	THIRD ANGLE PROJECTION
DRAWN BY / DATE	KENSUZUKI 2004/10/19
CHECKED BY / DATE	NUKITA 2004/10/19
APPROVED BY / DATE	KMORIKAWA 2010/10/13
MATERIAL NO.	SEE SHEET 1 OF 2
TITLE	0.5 FPC CONN NON-ZIF HSG ASSY (HGT=1.2MM)
	MOLEX INCORPORATED
DOCUMENT NO.	SD-51281-011
SHEET NO.	2 OF 2
SIZE	A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

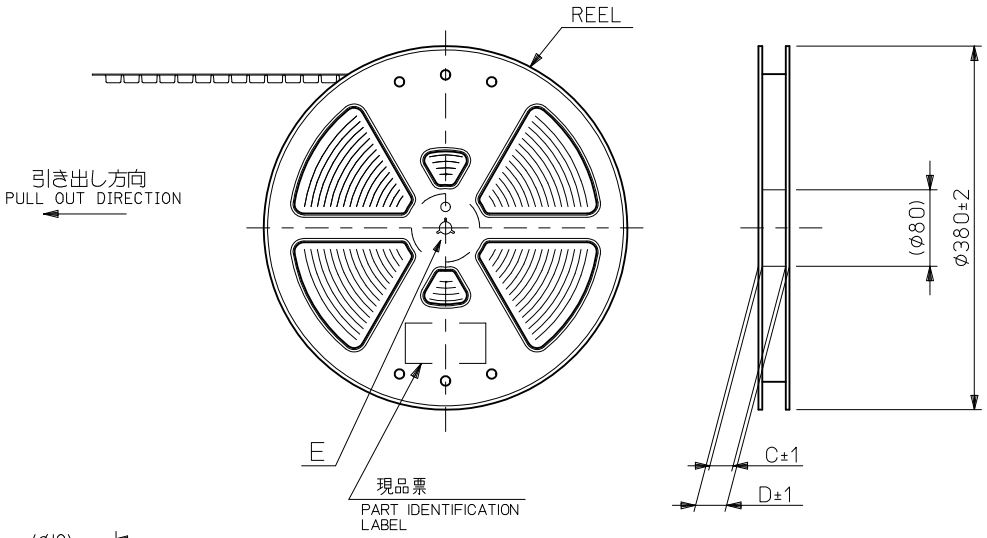





DETAIL E

NOTES

1. 製品詳細寸法については図面　SD-51281-011　を参照下さい。
   RE DETAILED DIMENSION, SEE SD-51281-011
2. 梱包数量：３０００個／リール
   NUMBER OF CONNECTORS : 3000PCS/REEL
3. リードテープ長さ LEAD TAPE LENGTH

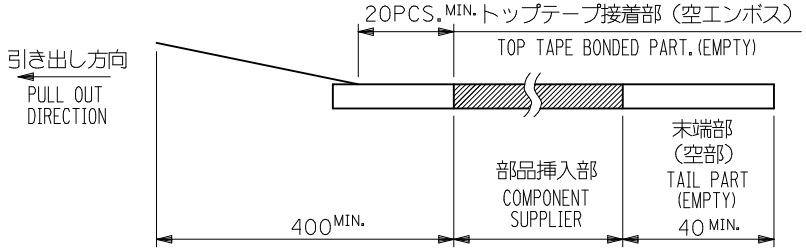

4. トップテープの剥離強度：0.1N～1.3N {10gf～130gf}
   （剥離方向は下図参照）
   尚、本規格値は出荷時に適用。（但し、輸送時に剥離が発生しないこと。）
   PEELING OFF FORCE OF TOP TAPE : 0.1N～1.3N {10gf～130gf}
   (PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
   THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT.
   PEEL OFF SHOULD NOT BE ALLOWED , DURING TRANSPORTATION.

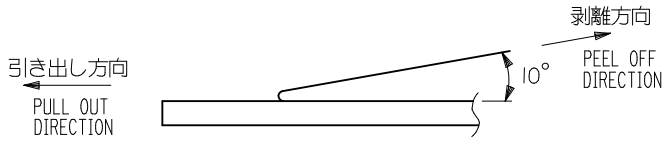

5. 材料 (MATERIAL)
   キャリアテープ(CARRIER TAPE)：ポリプロピレン(POLYPROPYLENE)
   トップテープ(TOPTAPE)：PET , PE , PEF
   リール(REEL)：ポリスチレン(PS)〈リサイクル材含む〉
   POLYSTYRENE (PS)<RECYCLE MATERIAL CONTAINED>
6. C,D 寸法は SHEET 2 ～ 3 を参照下さい。
   SEE SHEET 2 ～ 3 (DIMENSION C,D).
7. ELV 及び RoHS 適合品.
   ELV AND RoHS COMPLIANT.

REVISED				
EC NO: J2010-2187	2010/04/30			
DRWN:TONO	2010/09/15			
CH'KD:HIIJIMA	2010/10/04			
APPR:KMORIKAWA				
DESCRIPTION				
REV				
C				

GENERAL TOLERANCES (UNLESS SPECIFIED)	
10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGULAR ±3 °	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE	SCALE	DESIGN UNITS	
MM ONLY	---	METRIC	THIRD ANGLE PROJECTION

	DRAWN BY	DATE
	KENSUZUKI	2004/10/19
	CHECKED BY	DATE
	NUKITA	2004/10/19
	APPROVED BY	DATE
	NUKITA	2004/10/19


TITLE: 0.5 FPC CONN NON-ZIF (HGT=1.2MM) EMBSTP PKG

molex MOLEX INCORPORATED

MATERIAL NO.	DOCUMENT NO.	SHEET NO.
SEE SHEET 2~4	SD-51281-012	1 OF 4

SIZE A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

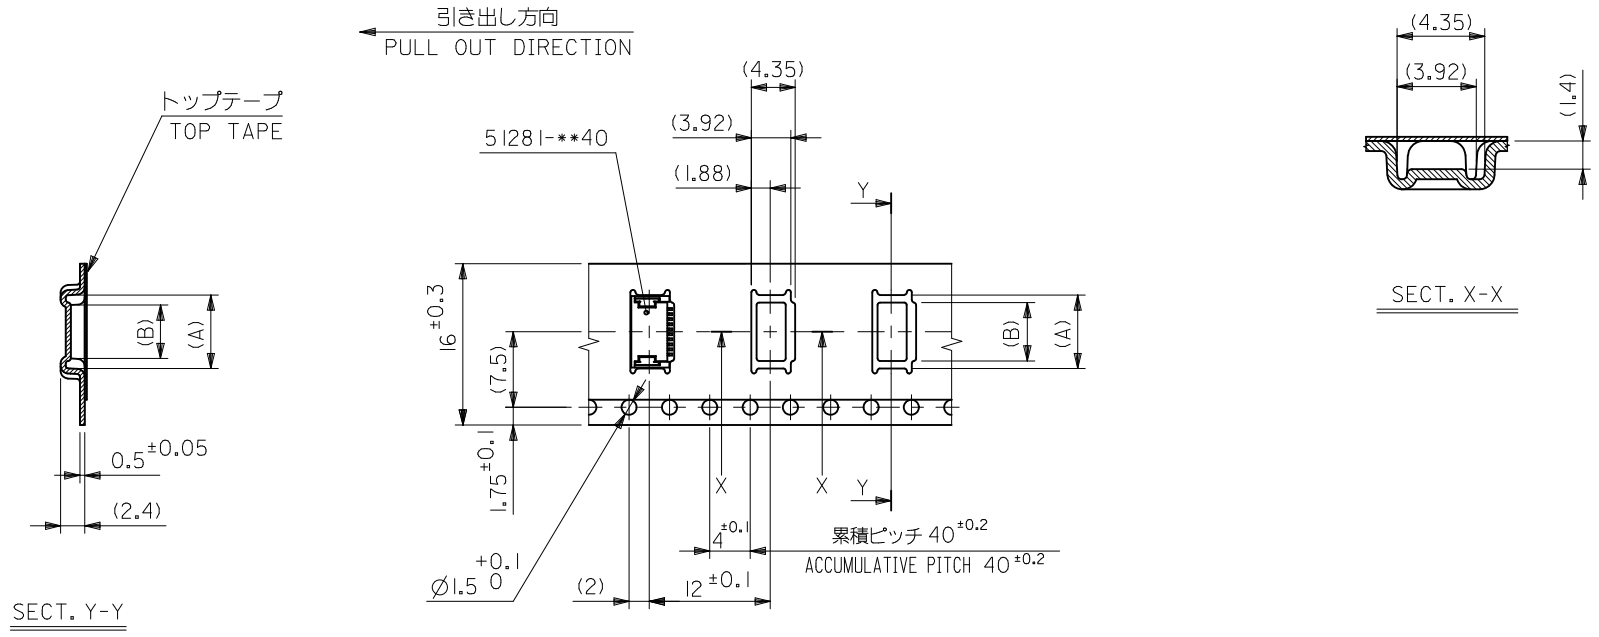

16mm幅キャリアテープ
16mm WIDTH CARRIER TAPE

キャリアテープ幅 CARRIER TAPE WIDTH	D	C	(B)	(A)	製品番号 MATERIAL No.	極数 CIRCUIT
16	21.4	17.4	4.3	6.3	51281-0894	8
			3.8	5.8	51281-0794	7
			3.3	5.3	51281-0694	6
			2.8	4.8	51281-0594	5

REVISED
EC NO: J2010-2187 2010/04/30
DRWN:TONO 2010/09/15
CH'KD:HIIJIMA 2010/10/04
APPR:KMORIKAWA
DESCRIPTION
REV
C

GENERAL TOLERANCES (UNLESS SPECIFIED)

10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGULAR	±3 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: ---
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: KENSUZUK DATE: 2004/10/19
CHECKED BY: NUKITA DATE: 2004/10/19
APPROVED BY: NUKITA DATE: 2004/10/19


TITLE: 0.5 FPC CONN NON-ZIF (HGT=1.2MM) EMBSTP PKG

MOLEX INCORPORATED


MATERIAL NO.: SEE TABLE
DOCUMENT NO.: SD-51281-012
SHEET NO.: 2 OF 4


SIZE A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

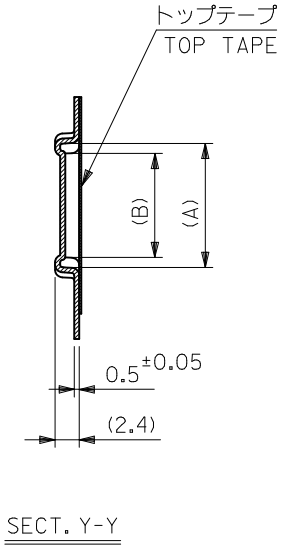

SECT. Y-Y

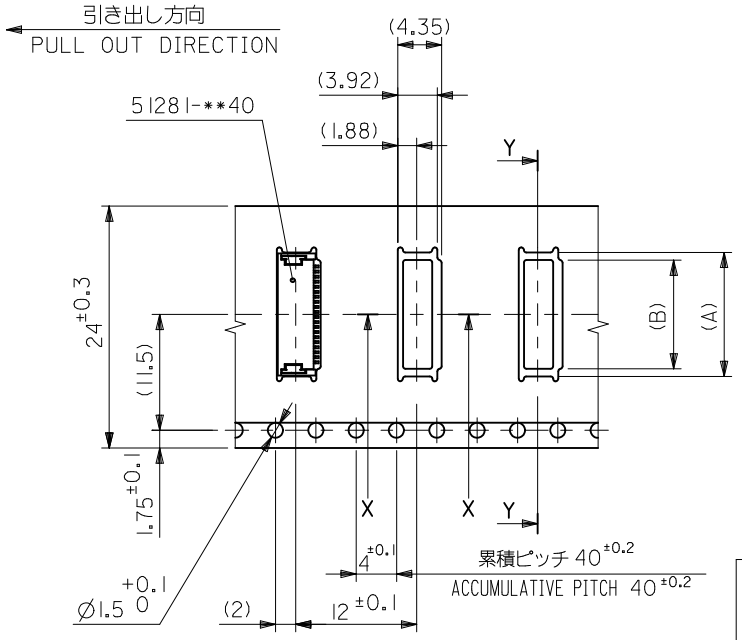



SECT. X-X

24mm幅キャリアテープ
24mm WIDTH CARRIER TAPE

キャリアテープ幅 CARRIER TAPE WIDTH	D	C	(B)	(A)	製品番号 MATERIAL No.	極数 CIRCUIT
24	29.4	25.4	12.3	14.3	51281-2494	24
			11.3	13.3	51281-2294	22
			10.3	12.3	51281-2094	20
			9.3	11.3	51281-1894	18
			8.3	10.3	51281-1694	16
			7.3	9.3	51281-1494	14
			6.3	8.3	51281-1294	12
			5.8	7.8	51281-1194	11
			5.3	7.3	51281-1094	10
			4.8	6.8	51281-0994	9

REVISED
EC NO: J2010-2187
DRWN:TONO 2010/04/30
CH'KD:HIIJIMA 2010/09/15
APPR:KMORIKAWA 2010/10/04
DESCRIPTION
REV C

GENERAL TOLERANCES (UNLESS SPECIFIED)

10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGULAR	±3 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: ---
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION


DRAWN BY	KENSUZUKI	DATE 2004/10/19
CHECKED BY	NUKITA	DATE 2004/10/19
APPROVED BY	NUKITA	DATE 2004/10/19

TITLE: 0.5 FPC CONN NON-ZIF (HGT=1.2MM) EMBSTP PKG

MOLEX INCORPORATED

MATERIAL NO.: SEE TABLE
DOCUMENT NO.: SD-51281-012
SHEET NO.: 3 OF 4
SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

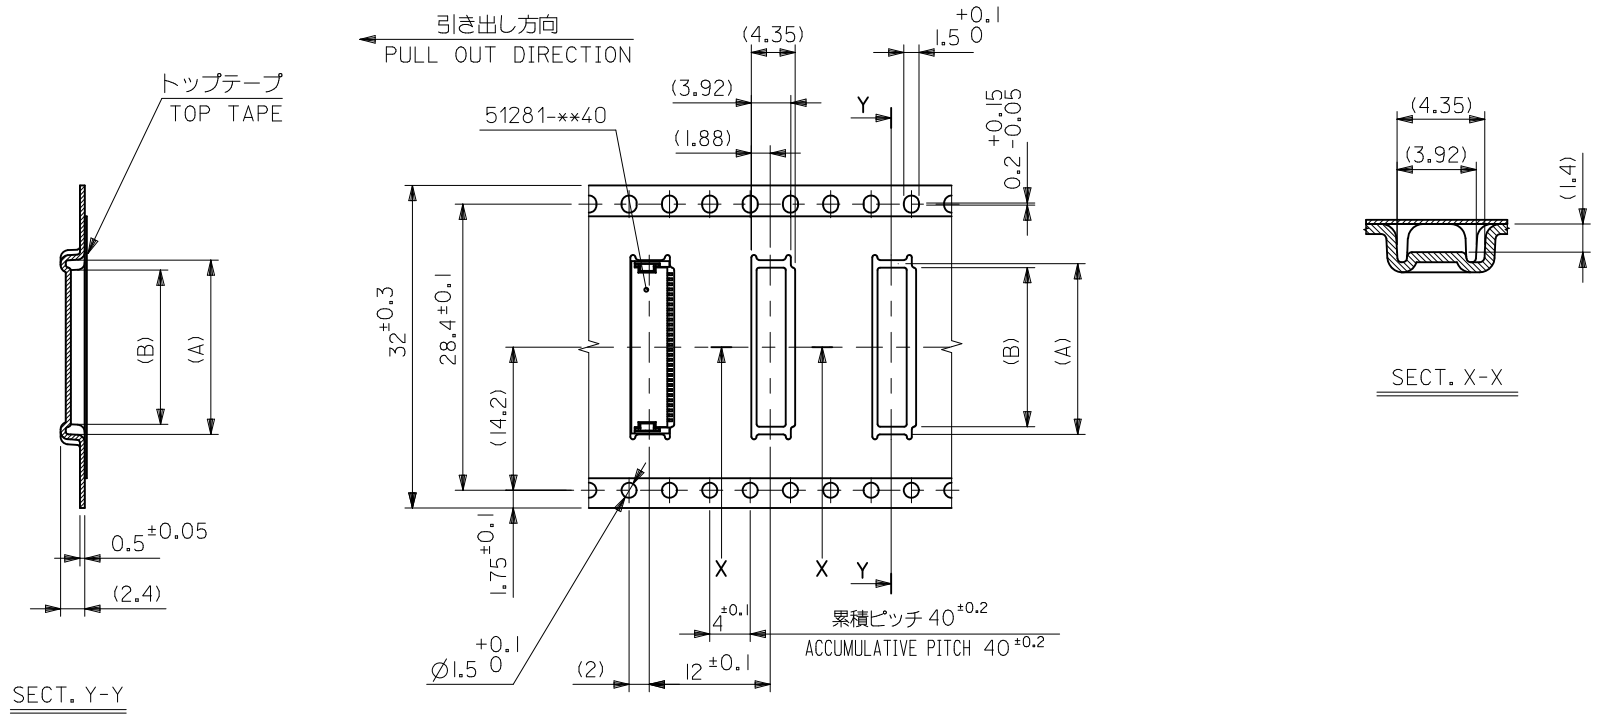

32mm幅キャリアテープ
32mm WIDTH CARRIER TAPE

32	37.4	33.4	13.3	15.3	51281-2694	26
キャリアテープ幅 CARRIER TAPE WIDTH	D	C	(B)	(A)	製品番号 MATERIAL No.	極数 CIRCUIT

REVISED
EC NO: J2010-2187 2010/04/30
DRWN:TONO 2010/09/15
CH'KD:HIIJIMA 2010/10/04
APPR:KMORIKAWA
DESCRIPTION
REV
C

GENERAL TOLERANCES (UNLESS SPECIFIED)

10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGULAR	±3 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: ---
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: KENSUZUKI DATE: 2004/10/19
CHECKED BY: NUKITA DATE: 2004/10/19
APPROVED BY: NUKITA DATE: 2004/10/19

TITLE: 0.5 FPC CONN NON-ZIF (HGT=1.2MM) EMBSTP PKG

MOLEX INCORPORATED

MATERIAL NO.: SEE TABLE
DOCUMENT NO.: SD-51281-012
SHEET NO.: 4 OF 4
SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- View 512810694 on WIN SOURCE
- Molex, LLC Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- Global Sourcing Solution
- Obsolete Management
- Cost Control Management
- Shortage Management
- Alternative Solution
- Excess Inventory Management