THE DATASHEET OF

G3VM-41LR5(TR05)

www.win-source.net 0086-755-83957316

G3VM-41LR5

MOS FET Relays

World's Smallest* SSOP Package MOS FET Relays with Low Output Capacitance and ON Resistance (C × R = 10 pF • Ω) in a 40-V Load Voltage Model.

- **ON resistance of 1 Ω (typical) suppresses output signal attenuation.**

* As of March 2011 Survey by OMRON

RoHS compliant




Note: The actual product is marked differently from the image shown here.

■ Application Examples

- **Semiconductor test equipment**
- **Test & Measurement equipment**
- **Communication equipment**
- **Data loggers**

■ Terminal Arrangement/Internal Connections

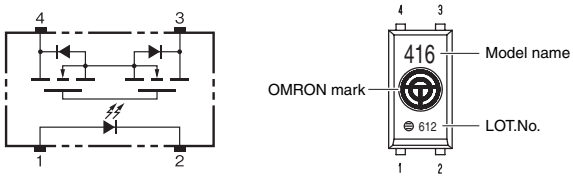

Note: The actual product is marked differently from the image shown here.

■ List of Models

Package type	Contact form	Terminals	Load voltage (peak value) *	Model	Minimum package quantity
					Number per tape and reel
SSOP4	1a (SPST-NO)	Surface-mounting Terminals	40 V	**G3VM-41LR5**	-
				G3VM-41LR5 (TR05)	500
				G3VM-41LR5 (TR10)	1,000
				G3VM-41LR5 (TR)	1,500

Note: Ask your OMRON representative for orders under 1,500 pcs, 1,000 pcs, or 500 pcs. We can supply products with the tape already cut.
Tape-cut SSOPs are packaged without humidity resistance. Use manual soldering to mount them.
Refer to common precautions.

* The AC peak and DC value are given for the load voltage.

■ Absolute Maximum Ratings (Ta = 25 °C)


Item		Symbol	Rating	Unit	Measurement conditions
Input	**LED forward current**	I_F	50	mA	
	LED forward current reduction rate	ΔI_F/°C	−0.5	mA/°C	Ta ≥ 25 °C
	LED reverse voltage	V_R	5	V	
	Connection temperature	T_J	125	°C	
Output	**Load voltage (AC peak/DC)**	V_{OFF}	40	V	
	Continuous load current (AC peak/DC)	I_O	300	mA	
	ON current reduction rate	ΔI_O/°C	−3.0	mA/°C	Ta ≥ 25 °C
	Connection temperature	T_J	125	°C	
Dielectric strength between I/O (See note 1.)		V_{I-O}	1500	Vrms	AC for 1 min
Ambient operating temperature		Ta	−20 to +85	°C	With no icing or condensation
Ambient storage temperature		Tstg	−40 to +125	°C	With no icing or condensation
Soldering temperature		-	260	°C	10 s

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

■ Electrical Characteristics (Ta = 25 °C)

Item		Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions
Input	**LED forward voltage**	V_F	1.0	1.15	1.3	V	I_F = 10 mA
	Reverse current	I_R	-	-	10	μA	V_R = 5 V
	Capacity between terminals	C_T	-	15	-	pF	V = 0, f = 1 MHz
	Trigger LED forward current	I_{FT}	-	-	4	mA	I_O = 100 mA
Output	**Maximum resistance with output ON**	R_{ON}	-	1.0	1.5	Ω	I_F = 5 mA, I_O = 300 mA, t = 10 ms
	Current leakage when the relay is open	I_{LEAK}	-	-	1.0	nA	V_{OFF} = 30 V, Ta = 50 °C
	Capacity between terminals	C_{OFF}	-	10	14	pF	V = 0, f = 100 MHz, t < 1 s
Capacity between I/O terminals		C_{I-O}	-	0.8	-	pF	f = 1 MHz, V_S = 0 V
Insulation resistance between I/O terminals		R_{I-O}	1000	-	-	MΩ	V_{I-O} = 500 VDC, RoH ≤ 60 %
Turn-ON time		t_{ON}	-	0.2	0.5	ms	I_F = 5 mA, R_L = 200 Ω, V_{DD} = 10 V (See note 2.)
Turn-OFF time		t_{OFF}	-	0.2	0.5	ms	

Note: 2. Turn-ON and Turn-OFF Times




■ Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.


Item	Symbol	Minimum	Typical	Maximum	Unit
Load voltage (AC peak/DC)	V_{DD}	-	-	32	V
Operating LED forward current	I_F	10	-	30	mA
Continuous load current (AC peak/DC)	I_O	-	-	300	mA
Ambient operating temperature	Ta	25	-	60	°C

■ Engineering Data


LED forward current vs. Ambient temperature

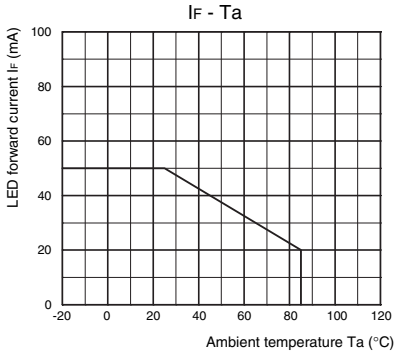


Continuous load current vs. Ambient temperature

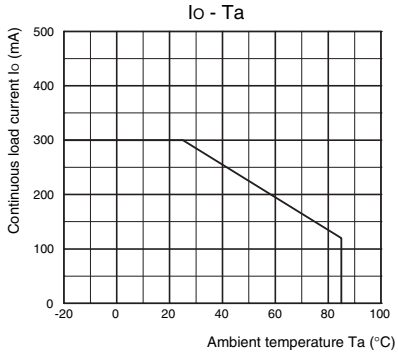


LED forward current vs. LED forward voltage

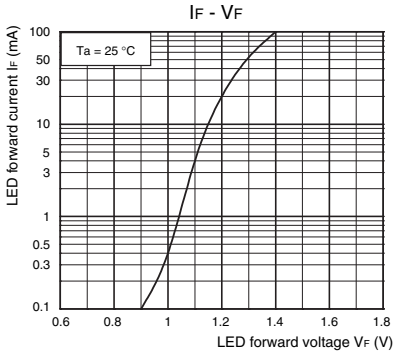


Continuous load current vs. On-state voltage

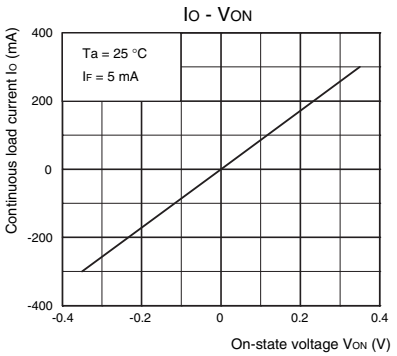


On-state resistance vs. Ambient temperature

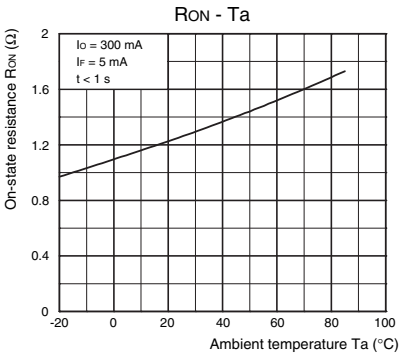


Trigger LED forward current vs. Ambient temperature

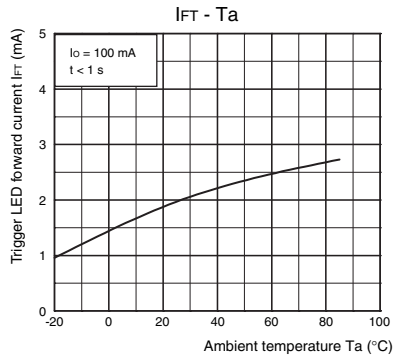


Turn ON, Turn OFF time vs. LED forward current

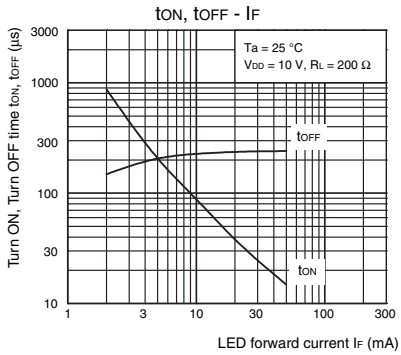


Turn ON, Turn OFF time vs. Ambient temperature

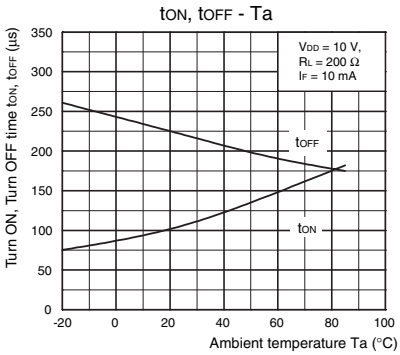

Current leakage vs. Load voltage

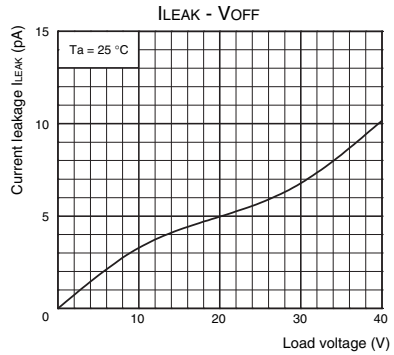

Output terminal capacitance vs. Load voltage

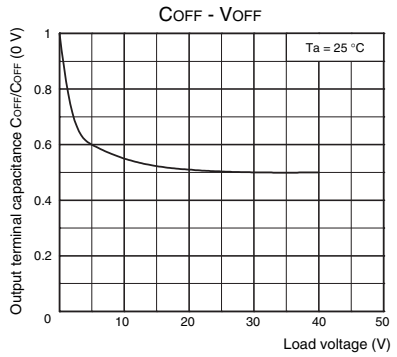


■ Safety Precautions

- Refer to **"Common Precautions"** for all G3VM models.

Appearance/Dimensions SSOP4 type

■ Appearance


SSOP (Shrink Small Outline Package)
SSOP4



Note: The actual product is marked differently from the image shown here.


■ Dimensions

(Unit: mm)



Surface-mounting Terminals


Weight: 0.03 g



Unless otherwise specified, the dimensional tolerance is ± 0.1 mm.

Actual Mounting Pad Dimensions

(Recommended Value, TOP VIEW)



Note: The actual product is marked differently from the image shown here.

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

OMRON Corporation
ELECTRONIC AND MECHANICAL COMPONENTS COMPANY **Contact: www.omron.com/ecb**

Cat. No. K200-E1-01
0412(0412)(O)

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- View G3VM-41LR5(TR05) on WIN SOURCE
- Omron Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- Global Sourcing Solution
- Obsolete Management
- Cost Control Management
- Shortage Management
- Alternative Solution
- Excess Inventory Management