




# THE DATASHEET OF CVC055CC-3205-3317




| PERFORMANCE SPECIFICATION                       | MIN  | TYP  | MAX  | UNITS              |
|-------------------------------------------------|------|------|------|--------------------|
| Lower Frequency:                                |      |      | 3205 | MHz                |
| Upper Frequency:                                | 3317 |      |      | MHz                |
| Tuning Voltage:                                 | 0.3  |      | 4.7  | VDC                |
| Supply Voltage:                                 | 4.75 | 5.0  | 5.25 | VDC                |
| Output Power:                                   | 0    | +3.0 | +6.0 | dBm                |
| Supply Current:                                 |      | 40   |      | mA                 |
| Harmonic Suppression (2 <sup>nd</sup> Harmonic) |      | -15  |      | dBc                |
| Pushing:                                        |      |      | 2.0  | MHz/V              |
| Pulling, all Phases:                            |      |      | 3.0  | MHz pk-pk          |
| Tuning Sensitivity:                             |      | 40   |      | MHz/V              |
| Phase Noise @ 10kHz offset:                     |      | -107 | -102 | dBc/Hz             |
| Phase Noise @ 100kHz offset:                    |      | -127 |      | dBc/Hz             |
| Load Impedance:                                 |      | 50   |      | $\Omega$           |
| Input Capacitance:                              |      |      | 15   | pF                 |
| Operating Temperature Range:                    | -40  |      | +85  | $^{\circ}\text{C}$ |
| Storage Temperature Range:                      | -45  |      | +90  | $^{\circ}\text{C}$ |

Phase Noise (1 Hz BW, Typical)

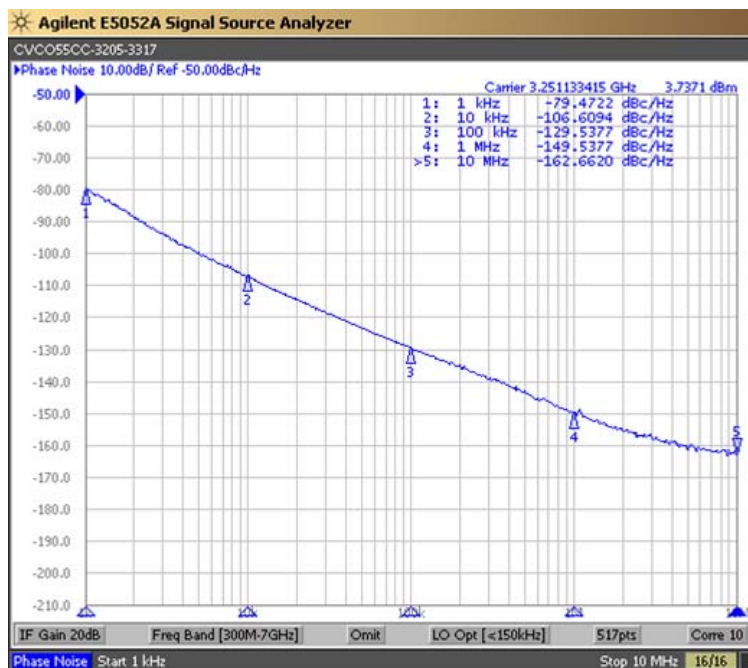


Tuning Curve (Typical)

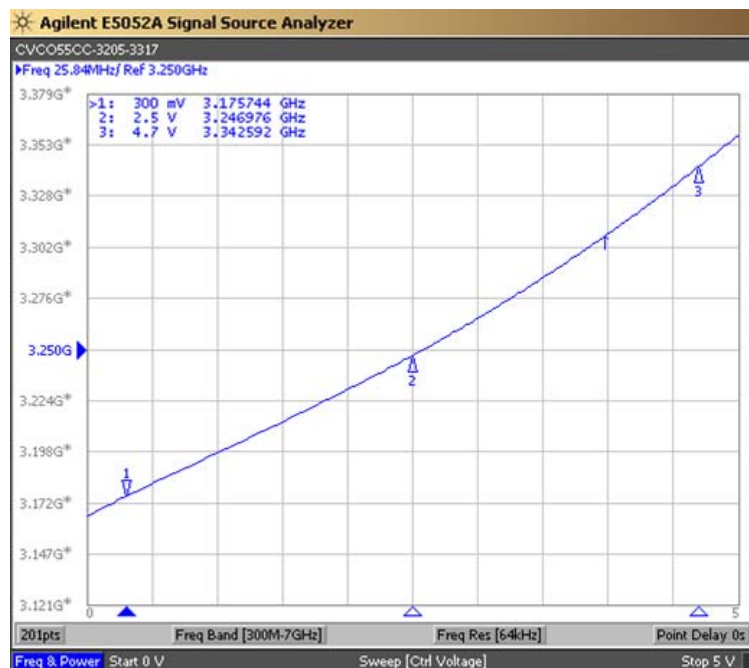

**Product Control:**





|                      |                    |               |             |
|----------------------|--------------------|---------------|-------------|
| Crystek Part Number: | CVCO55CC-3205-3317 | Release Date: | 06-May-2014 |
| Revision Level:      | C                  | Responsible:  | C. Vales    |





**CRYSTEK**  
**MICROWAVE**  
A DIVISION OF CRYSTEK CORPORATION


# Coaxial Resonator Oscillator-CRO CVCO55CC-3205-3317

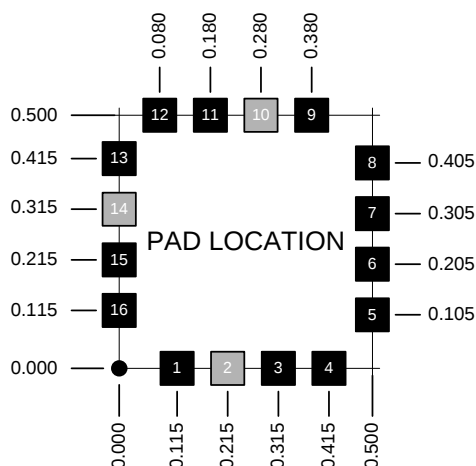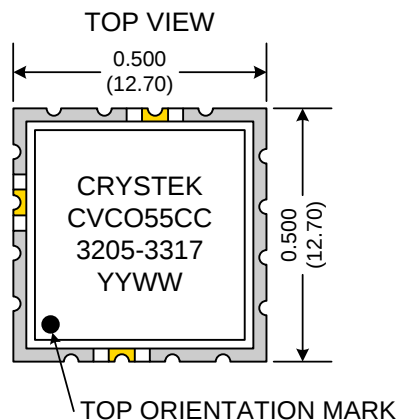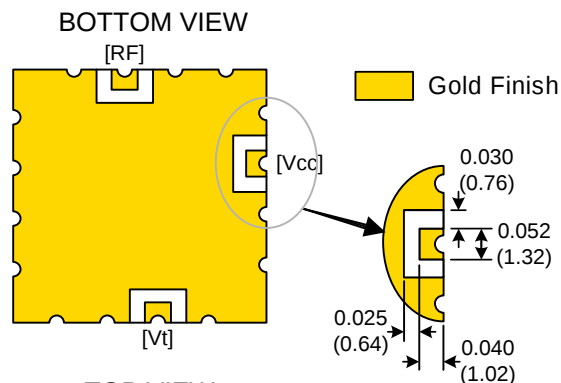

| Pad    | Connection |
|--------|------------|
| 2      | Vt         |
| 10     | RF-OUTPUT  |
| 14     | Vcc        |
| Others | GROUND     |

- Unless otherwise specified, Dimensions are in:  $\frac{IN}{(mm)}$
- Pad Location Dimensions are in: Inches

## TAPE AND REEL

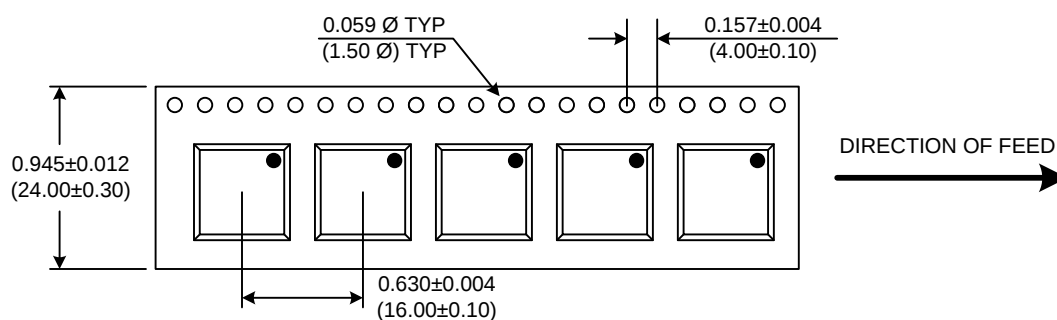

Drawing not to scale

### Product Control:

|                      |                    |               |             |
|----------------------|--------------------|---------------|-------------|
| Crystek Part Number: | CVCO55CC-3205-3317 | Release Date: | 06-May-2014 |
| Revision Level:      | C                  | Responsible:  | C. Vales    |

Specification is subject to change without notice

Page 2 of 2



**CRYSTEK**  
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FLORIDA 33913  
PHONE: 239-561-3311 • 800-237-3061  
FAX: 239-561-1025 • WWW.CRYSTEK.COM

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

⊖ [View CVCO55CC-3205-3317](#) on WIN SOURCE

⊖ [Crystek Corporation](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management