



**THE DATASHEET OF  
CM1422-03CP**



# CM1420, CM1422

## LCD EMI Filter Array with ESD Protection

### Description

The CM1420 and CM1422 are EMI filter arrays with ESD protection, which integrate six and eight Pi-filters (C-R-C), respectively. The CM1420/22 has component values of 15 pF – 100 Ω – 15 pF. These devices include ESD protection diodes on every pin, which provide a very high level of protection for sensitive electronic components that may be subjected to electrostatic discharge (ESD). The ESD diodes connected to the filter ports safely dissipate ESD strikes of ±15 kV, well beyond the maximum requirement of the IEC 61000-4-2 international standard. Using the MIL-STD-883 (Method 3015) specification for Human Body Model (HBM) ESD, the pins are protected for contact discharges at greater than ±30 kV.

This device is particularly well suited for portable electronics (e.g. wireless handsets, PDAs, notebook computers) because of its small package format and easy-to-use pin assignments. In particular, the CM1420/22 is ideal for EMI filtering and protecting data lines from ESD for the LCD display in clamshell handsets.

The CM1420 and CM1422 incorporate *OptiGuard*™ coating which results in improved reliability at assembly. The CM1420 and CM1422 are available in space-saving, low-profile chip scale packages with RoHS compliant lead-free finishing.

### Features

- Functionally and Pin Compatible with CSPEMI606 (CM1420) and CSPEMI608 (CM1422) Devices
- *OptiGuard*™ Coated for Improved Reliability at Assembly
- Six and Eight Channels of EMI Filtering
- ±15 kV ESD Protection on Each Channel (IEC 61000-4-2 Level 4, Contact Discharge)
- ±30 kV ESD Protection on Each Channel (HBM)
- Better than 30 dB of Attenuation at 1 GHz to 3 GHz
- Chip Scale Package Features Extremely Low Lead Inductance for Optimum Filter and ESD Performance
- 15-Bump, 2.960 mm x 1.330 mm Footprint Chip Scale Package (CM1420)
- 20-Bump, 4.000 mm x 1.458 mm Footprint Chip Scale Package (CM1422)
- These Devices are Pb-Free and are RoHS Compliant

### Applications

- LCD Data Lines in Clamshell Wireless Handsets
- EMI Filtering & ESD Protection for High-Speed I/O Data Ports
- Wireless Handsets / Cell Phones
- Notebook Computers
- PDAs / Handheld PCs
- EMI Filtering for High-Speed Data Lines



ON Semiconductor®

<http://onsemi.com>




WLCSP15  
CP SUFFIX  
CASE 567BS




WLCSP20  
CP SUFFIX  
CASE 567BZ

### MARKING DIAGRAM



CM1420

15-Bump CSP Package



CM1422

20-Bump CSP Package

N203 = CM1420-03CP

N223 = CM1422-03CP


### ORDERING INFORMATION

| Device      | Package             | Shipping†        |
|-------------|---------------------|------------------|
| CM1420-03CP | CSP-15<br>(Pb-Free) | 3500/Tape & Reel |
| CM1422-03CP | CSP-20<br>(Pb-Free) | 3500/Tape & Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.


# CM1420, CM1422

## BLOCK DIAGRAM

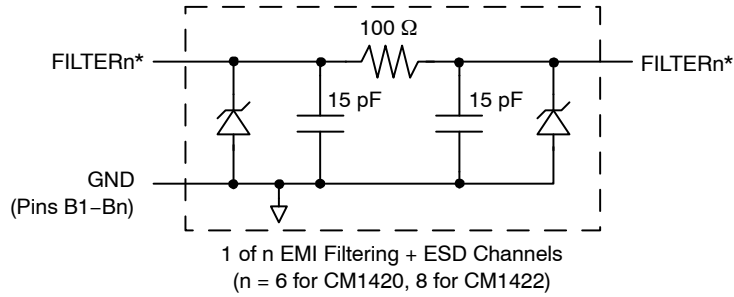


\*See Package/Pinout Diagrams for expanded pin information.



## PACKAGE / PINOUT DIAGRAMS

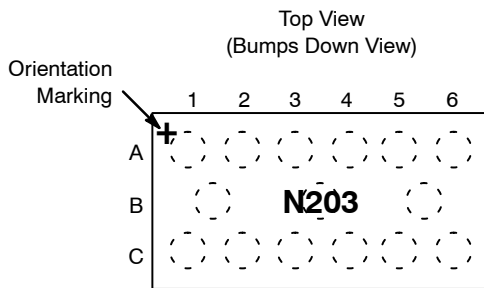

Bottom View  
(Bumps Up View)

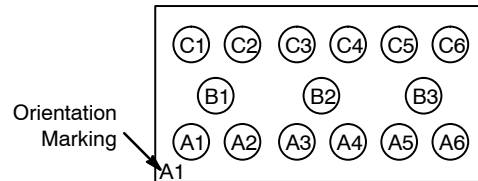

CM1420 CSP Package

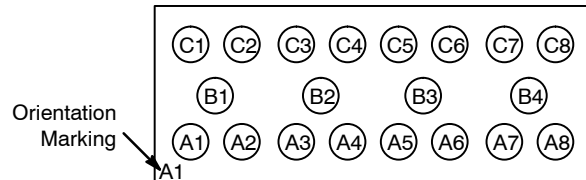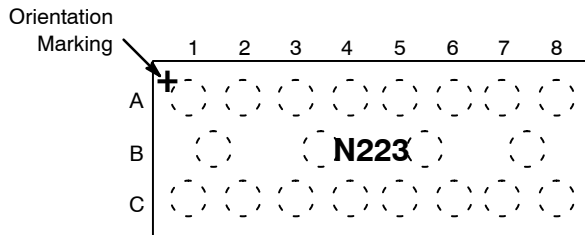

CM1422 CSP Package

Table 1. PIN DESCRIPTIONS

| CM1420 | CM1422 | Name    | Description      | CM1420 | CM1422 | Name    | Description      |
|--------|--------|---------|------------------|--------|--------|---------|------------------|
| Pin(s) | Pin(s) |         |                  | Pin(s) | Pin(s) |         |                  |
| A1     | A1     | FILTER1 | Filter Channel 1 | C1     | C1     | FILTER1 | Filter Channel 1 |
| A2     | A2     | FILTER2 | Filter Channel 2 | C2     | C2     | FILTER2 | Filter Channel 2 |
| A3     | A3     | FILTER3 | Filter Channel 3 | C3     | C3     | FILTER3 | Filter Channel 3 |
| A4     | A4     | FILTER4 | Filter Channel 4 | C4     | C4     | FILTER4 | Filter Channel 4 |
| A5     | A5     | FILTER5 | Filter Channel 5 | C5     | C5     | FILTER5 | Filter Channel 5 |
| A6     | A6     | FILTER6 | Filter Channel 6 | C6     | C6     | FILTER6 | Filter Channel 6 |
| -      | A7     | FILTER7 | Filter Channel 7 | -      | C7     | FILTER7 | Filter Channel 7 |
| -      | A8     | FILTER8 | Filter Channel 8 | -      | C8     | FILTER8 | Filter Channel 8 |
| B1-B3  | B1-B4  | GND     | Device Ground    |        |        |         |                  |

# CM1420, CM1422

## SPECIFICATIONS

**Table 2. ABSOLUTE MAXIMUM RATINGS**

| Parameter                 | Rating      | Units |
|---------------------------|-------------|-------|
| Storage Temperature Range | -65 to +150 | °C    |
| DC Power per Resistor     | 100         | mW    |
| DC Package Power Rating   | 500         | mW    |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

**Table 3. STANDARD OPERATING CONDITIONS**

| Parameter                   | Rating     | Units |
|-----------------------------|------------|-------|
| Operating Temperature Range | -40 to +85 | °C    |

**Table 4. ELECTRICAL OPERATING CHARACTERISTICS** (Note 1)

| Symbol             | Parameter  | Conditions                            | Min         | Typ          | Max         | Units |
|--------------------|--|---------------------------------------|-------------|--------------|-------------|-------|
| R                  | Resistance   |                                       | 80          | 100          | 120         | Ω     |
| C                  | Capacitance  | At 2.5 V DC, 1 MHz,<br>30 mV AC       | 12          | 15           | 18          | pF    |
| V <sub>DIODE</sub> | Diode Standoff Voltage   | I <sub>DIODE</sub> = 10 μA            |             | 6.0          |             | V     |
| I <sub>LEAK</sub>  | Diode Leakage Current (reverse bias)   | V <sub>DIODE</sub> = 3.3 V            |             | 100          | 200         | nA    |
| V <sub>SIG</sub>   | Signal Clamp Voltage<br>Positive Clamp<br>Negative Clamp   | I <sub>LOAD</sub> = 10 mA<br>(Note 3) | 5.6<br>-1.5 | 6.8<br>-0.8  | 9.0<br>-0.4 | V     |
| V <sub>ESD</sub>   | In-system ESD Withstand Voltage<br>a) Human Body Model, MIL-STD-883, Method 3015<br>b) Contact Discharge per IEC 61000-4-2 Level 4 | (Note 2)                              | ±30<br>±15  |              |             | kV    |
| R <sub>DYN</sub>   | Dynamic Resistance<br>Positive<br>Negative   |                                       |             | 2.30<br>0.90 |             | Ω     |
| f <sub>C</sub>     | Cut-off Frequency<br>Z <sub>SOURCE</sub> = 50 Ω, Z <sub>LOAD</sub> = 50 Ω  | R = 100 Ω, C = 15 pF                  |             | 120          |             | MHz   |

1. T<sub>A</sub> = 25 °C unless otherwise specified.
2. ESD applied to input and output pins with respect to GND, one at a time.
3. Clamping voltage is measured at the opposite side of the EMI filter to the ESD pin. For example, if ESD is applied to Pin A1, then clamping voltage is measured at Pin C1.

# CM1420, CM1422

## PERFORMANCE INFORMATION

Typical Filter Performance ( $T_A = 25^\circ\text{C}$ , DC Bias = 0 V, 50  $\Omega$  Environment)

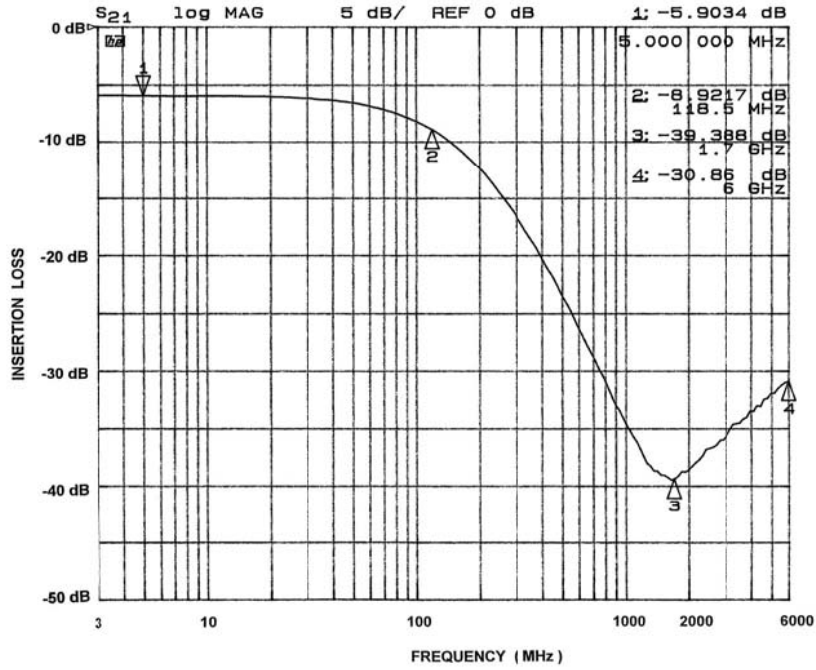


Figure 1. Insertion Loss vs. Frequency (A1-C1 to GND B1)

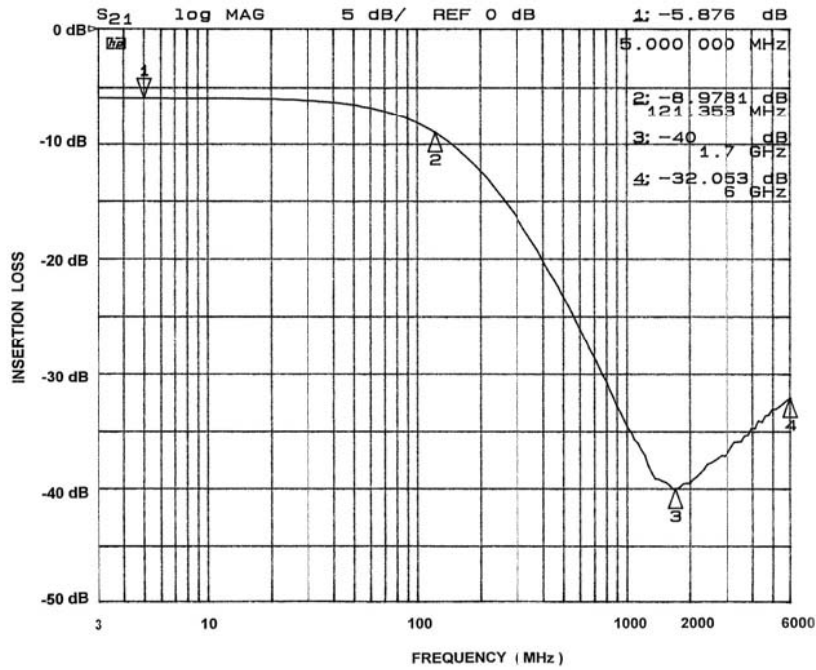


Figure 2. Insertion Loss vs. Frequency (A2-C2 to GND B1)

# CM1420, CM1422

## PERFORMANCE INFORMATION (Cont'd)

Typical Filter Performance ( $T_A = 25^\circ\text{C}$ , DC Bias = 0 V, 50  $\Omega$  Environment)

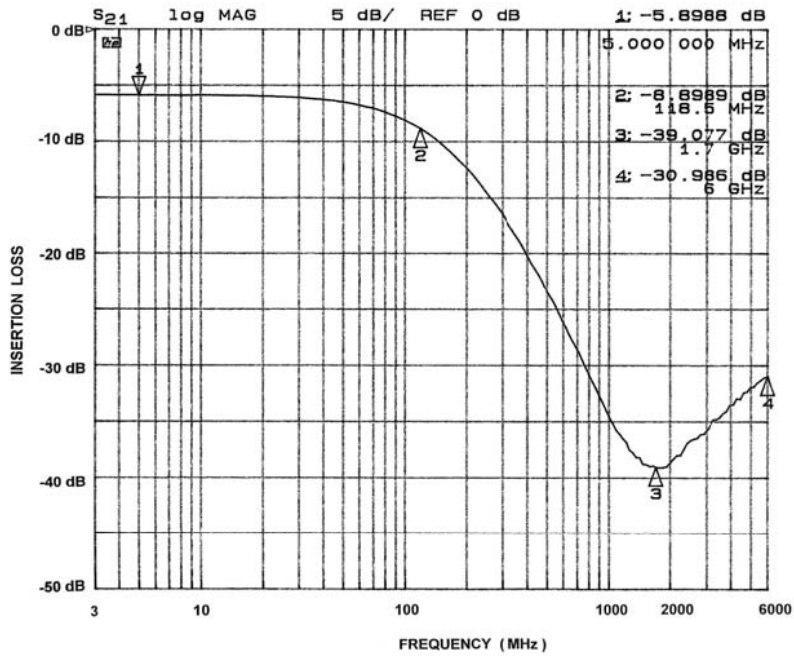


Figure 3. Insertion Loss vs. Frequency (A3-C3 to GND B2)

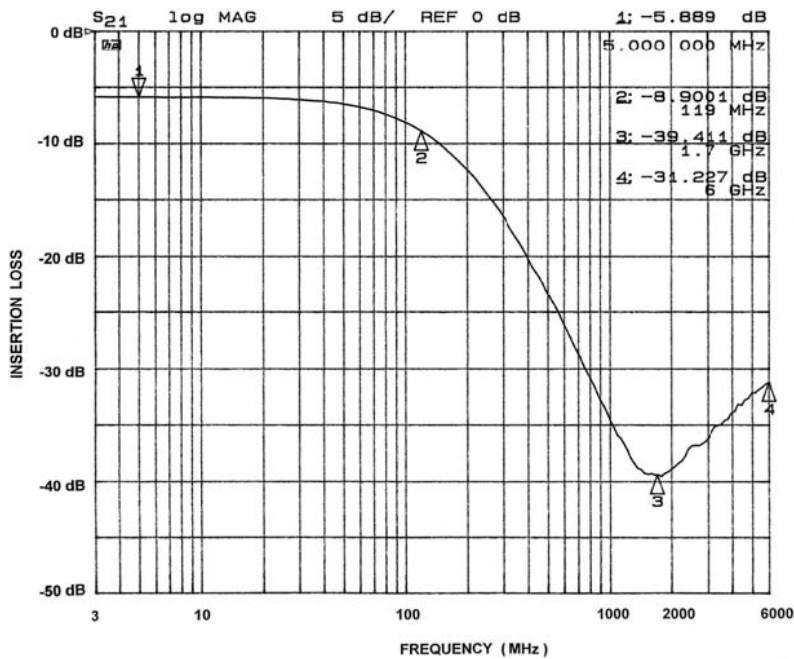


Figure 4. Insertion Loss vs. Frequency (A4-C4 to GND B2)

# CM1420, CM1422

## PERFORMANCE INFORMATION (Cont'd)

Typical Filter Performance ( $T_A = 25^\circ\text{C}$ , DC Bias = 0 V, 50  $\Omega$  Environment)

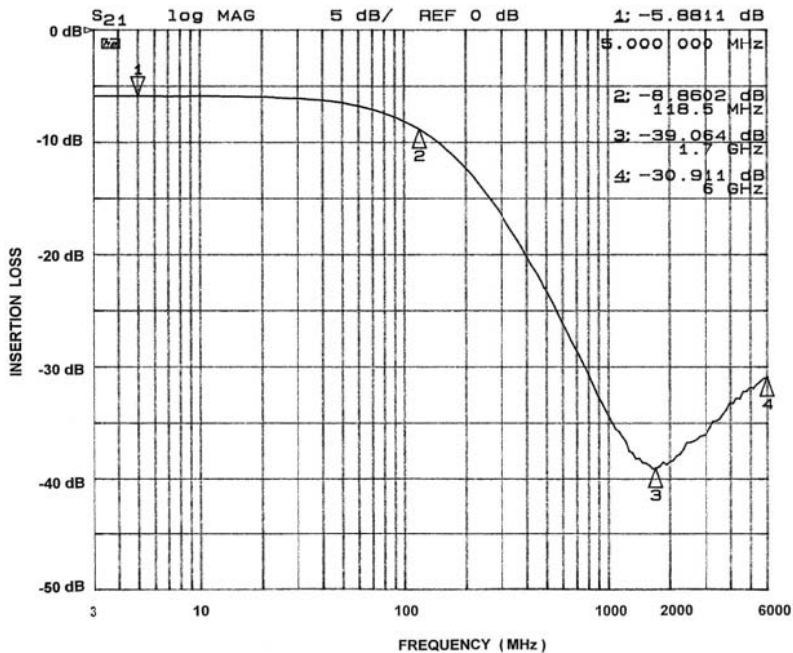


Figure 5. Insertion Loss vs. Frequency (A5-C5 to GND B3)

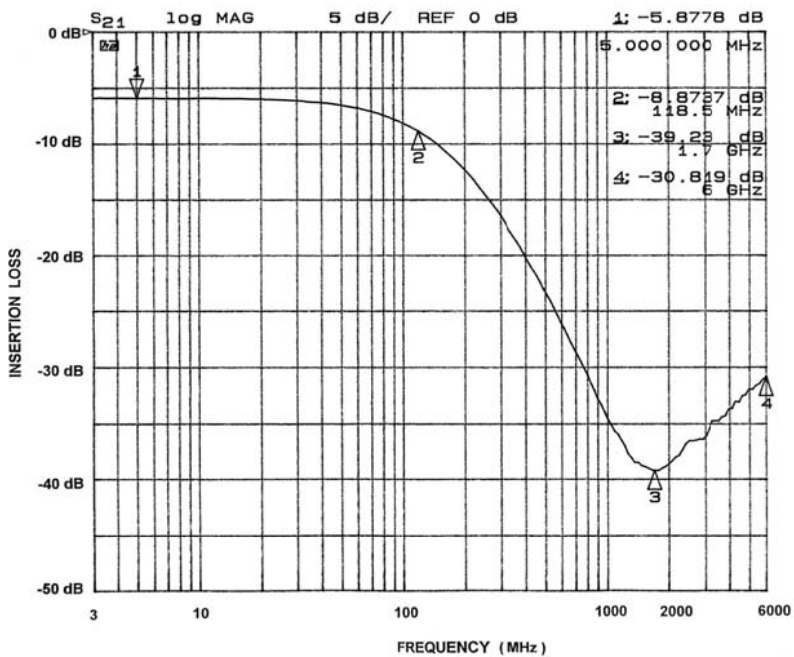


Figure 6. Insertion Loss vs. Frequency (A6-C6 to GND B3)

# CM1420, CM1422

## PERFORMANCE INFORMATION (Cont'd)

Typical Filter Performance ( $T_A = 25^\circ\text{C}$ , DC Bias = 0 V, 50  $\Omega$  Environment)

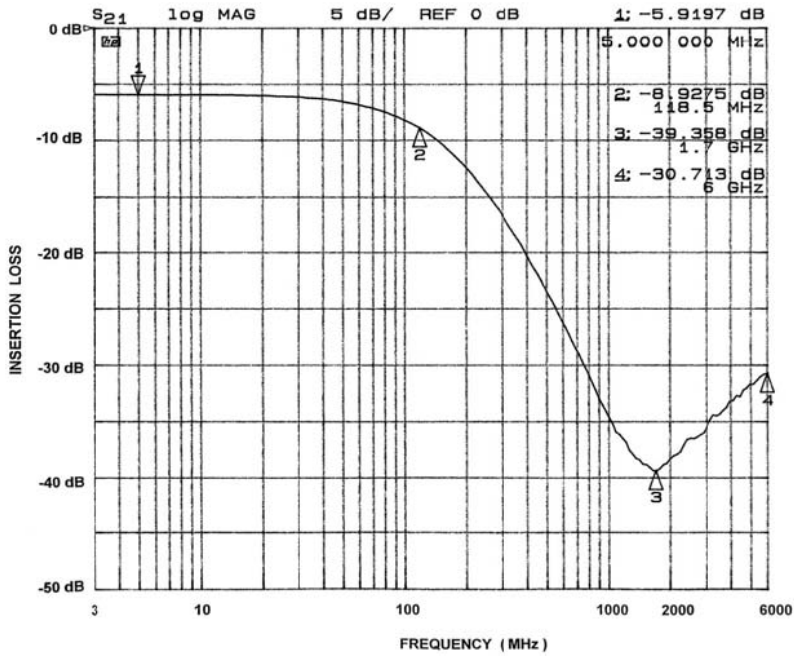


Figure 7. Insertion Loss vs. Frequency  
(A7-C7 to GND B4, CM1422 Only)


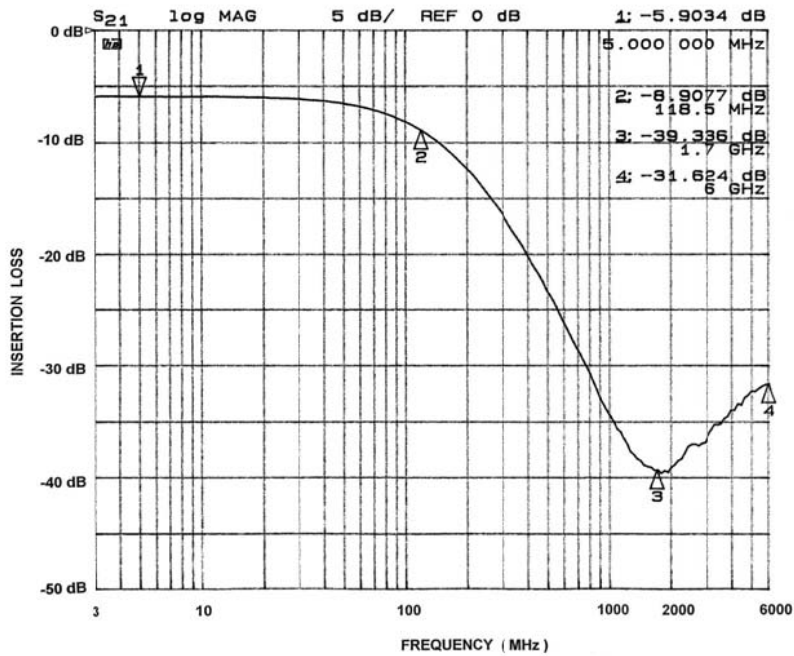


Figure 8. Insertion Loss vs. Frequency  
(A8-C8 to GND B4, CM1422 Only)

# CM1420, CM1422

## PERFORMANCE INFORMATION (Cont'd)

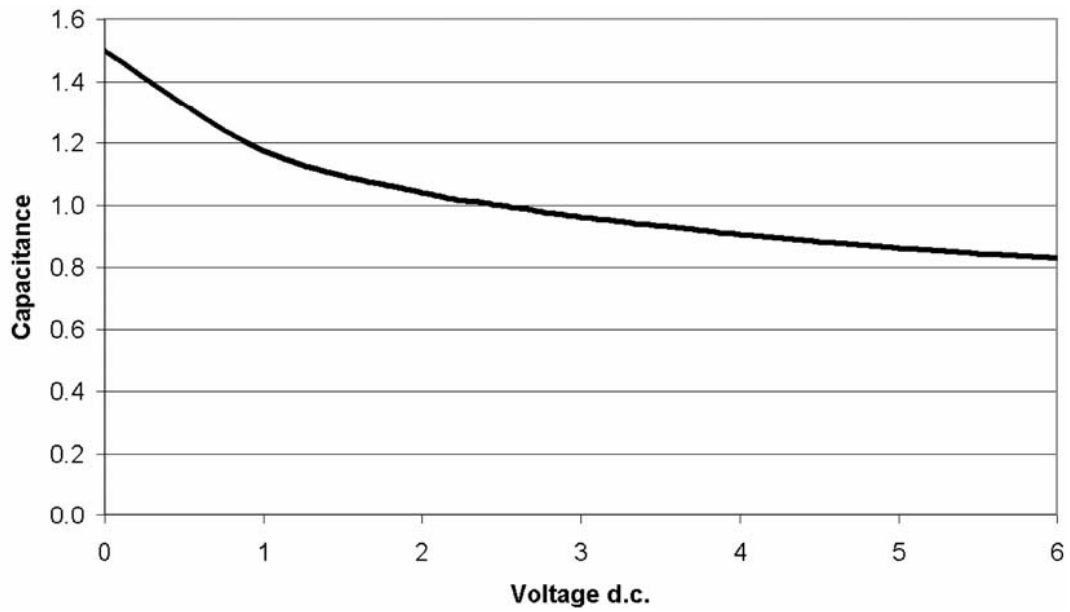


**Figure 9. Filter Capacitance vs. Input Voltage over Temperature  
(normalized to capacitance at 2.5 VDC and 25°C)**

# CM1420, CM1422


## APPLICATION INFORMATION

**Table 5. PRINTED CIRCUIT BOARD RECOMMENDATIONS**

| Parameter  | Value                        |
|--|------------------------------|
| Pad Size on PCB  | 0.240 mm                     |
| Pad Shape  | Round                        |
| Pad Definition   | Non-Solder Mask defined pads |
| Solder Mask Opening  | 0.290 mm Round               |
| Solder Stencil Thickness   | 0.125 – 0.150 mm             |
| Solder Stencil Aperture Opening (laser cut, 5% tapered walls)                      | 0.300 mm Round               |
| Solder Flux Ratio  | 50/50 by volume              |
| Solder Paste Type  | No Clean                     |
| Pad Protective Finish  | OSP (Entek Cu Plus 106A)     |
| Tolerance – Edge To Corner Ball  | ±50 μm                       |
| Solder Ball Side Coplanarity   | ±20 μm                       |
| Maximum Dwell Time Above Liquidous   | 60 seconds                   |
| Maximum Soldering Temperature for Lead-free Devices using a Lead-free Solder Paste | 260°C                        |

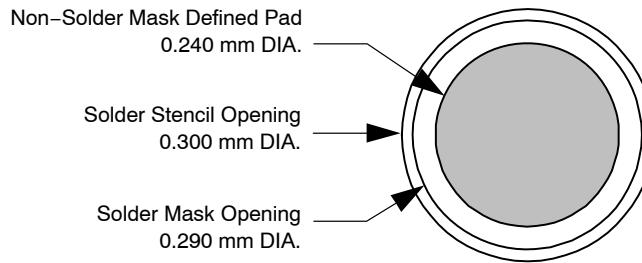

**Figure 10. Recommended Non-Solder Mask Defined Pad Illustration**

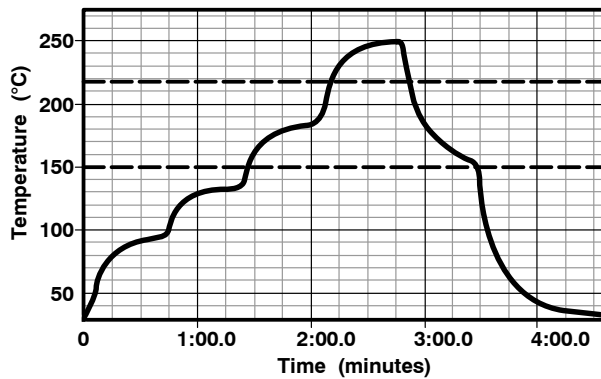


**Figure 11. Lead-free (SnAgCu) Solder Ball Reflow Profile**

# CM1420, CM1422

## PACKAGE DIMENSIONS


WLCSP15, 2.96x1.33  
CASE 567BS-01  
ISSUE O

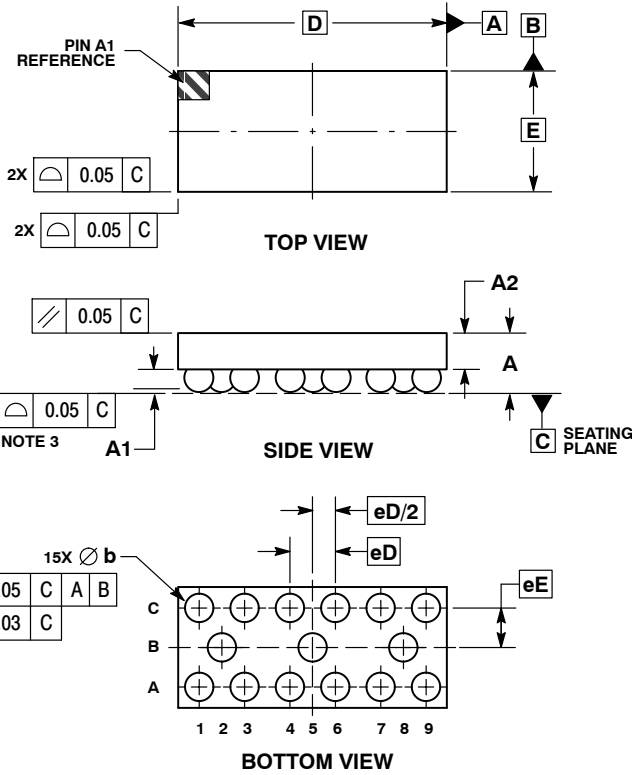

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
  2. CONTROLLING DIMENSION: MILLIMETERS.
  3. COPLANARITY APPLIES TO SPHERICAL CROWNS OF SOLDER BALLS.

| DIM | MILLIMETERS |      |
|-----|-------------|------|
|     | MIN         | MAX  |
| A   | 0.56        | 0.65 |
| A1  | 0.21        | 0.27 |
| A2  | 0.40        | REF  |
| b   | 0.29        | 0.35 |
| D   | 2.96        | BSC  |
| E   | 1.33        | BSC  |
| eD  | 0.50        | BSC  |
| eE  | 0.435       | BSC  |

### RECOMMENDED SOLDERING FOOTPRINT\*

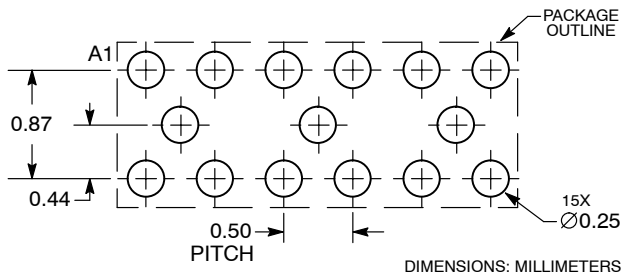


\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# CM1420, CM1422

## PACKAGE DIMENSIONS


WLCSP20, 4.00x1.46  
CASE 567BZ-01  
ISSUE O

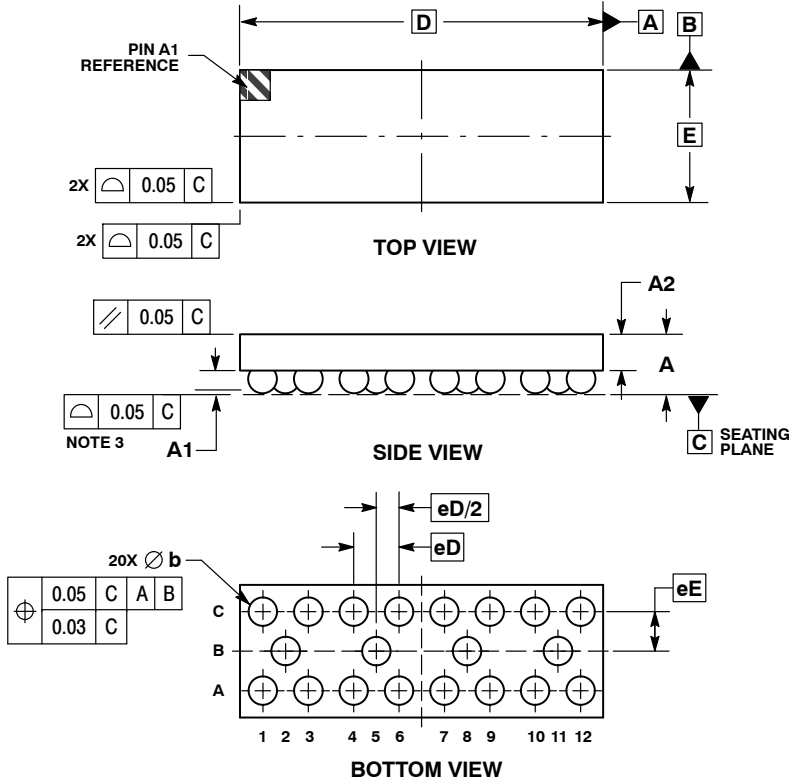

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
  2. CONTROLLING DIMENSION: MILLIMETERS.
  3. COPLANARITY APPLIES TO SPHERICAL CROWNS OF SOLDER BALLS.

| DIM | MILLIMETERS |      |
|-----|-------------|------|
|     | MIN         | MAX  |
| A   | 0.56        | 0.65 |
| A1  | 0.21        | 0.27 |
| A2  | 0.40 REF    |      |
| b   | 0.29        | 0.35 |
| D   | 4.00 BSC    |      |
| E   | 1.46 BSC    |      |
| eD  | 0.50 BSC    |      |
| eE  | 0.435 BSC   |      |

### RECOMMENDED SOLDERING FOOTPRINT\*

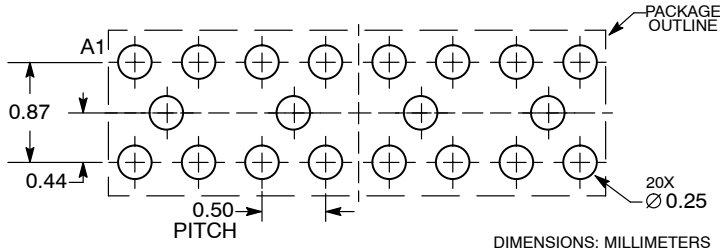

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

OptiGuard™ is a trademark of Semiconductor Components Industries, LLC (SCILLC).

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION



**LITERATURE FULFILLMENT:**  
Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** orderlit@onsemi.com

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5773-3850

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)  
**Order Literature:** <http://www.onsemi.com/orderlit>  
For additional information, please contact your local Sales Representative

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View CM1422-03CP](#) on WIN SOURCE
-  [ON Semiconductor](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management