



**THE DATASHEET OF  
SMAZ5943B-M3/61**



## Surface Mount Power Voltage-Regulating Diodes


**SMA (DO-214AC)**

Cathode Anode


**RoHS**  
 COMPLIANT  
 HALOGEN  
**FREE**  
Available
**FEATURES**

- Low profile package
- Ideal for automated placement
- Low Zener impedance
- Low regulation factor
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C
- Material categorization: for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)

**LINKS TO ADDITIONAL RESOURCES**


3D Models

PRIMARY CHARACTERISTICS	
$V_Z$	5.6 V to 68 V
$P_{tot}$ at $T_L = 75\text{ °C}$	1500 mW
$P_{tot}$ at $T_A = 25\text{ °C}$	500 mW
$T_J$ max.	150 °C
$V_Z$ specification	Pulse current
Package	SMA (DO-214AC)
Circuit configuration	Single

**TYPICAL APPLICATIONS**

For general purpose regulation and protection applications.

**MECHANICAL DATA**
**Case:** SMA (DO-214AC)

 Molding compound meets UL 94 V-0 flammability rating  
 Base P/N-E3 - RoHS-compliant, and industrial grade  
 Base P/N-M3 - halogen-free, RoHS-compliant, and industrial grade

**Terminals:** matte tin plated leads, solderable per J-STD-002 and JESD22-B102

E3, M3 suffix meets JESD 201 class 2 whisker test

**Polarity:** color band denotes cathode end

MAXIMUM RATINGS ( $T_A = 25\text{ °C}$ , unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNIT
Power dissipation at $T_L = 75\text{ °C}$ (fig. 1)	$P_{tot}^{(1)}$	1500	mW
Power dissipation at $T_A = 25\text{ °C}$ (fig. 1)	$P_{tot}^{(2)}$	500	
Maximum instantaneous forward voltage at 200 mA for all types	$V_F^{(3)}$	1.5	V
Operating junction and storage temperature range	$T_J, T_{STG}$	-65 to +150	°C

**Notes**

- (1) Mounted on PCB with 5.0 mm x 5.0 mm copper pads attached to each terminal
- (2) Mounted on minimum recommended pad layout
- (3) Pulse test: 300  $\mu$ s pulse width, 1 % duty cycle

ELECTRICAL CHARACTERISTICS	
SYMBOL	PARAMETER
$V_Z$	Reverse Zener voltage at $I_{ZT}$
$I_{ZT}$	Reverse current
$Z_{ZT}$	Maximum Zener impedance at $I_{ZT}$
$I_{ZK}$	Reverse current
$Z_{ZK}$	Maximum Zener impedance at $I_{ZK}$
$I_R$	Reverse leakage current at $V_R$
$V_R$	Reverse voltage
$I_F$	Forward current
$V_F$	Forward voltage at $I_F$
$I_{ZM}$	Maximum DC Zener current



Zener Voltage Regulator

ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)											
PART NUMBER	DEVICE MARKING CODE	ZENER VOLTAGE RANGE			TEST CURRENT		MAXIMUM ZENER IMPEDANCE		REVERSE LEAKAGE CURRENT		MAXIMUM ZENER CURRENT
		$V_Z$ AT $I_{ZT}$			$I_{ZT}$	$I_{ZK}$	$Z_{ZT}$ AT $I_{ZT}$	$Z_{ZK}$ AT $I_{ZK}$	$I_R$ AT $V_R$		$I_{ZM}$
		V			mA		$\Omega$		$\mu\text{A}$	V	mA
		MIN.	NOM.	MAX.			MAX.	MAX.	MAX.		MAX.
SMAZ5919B	19B	5.32	5.6	5.88	66.9	1	5	700	200	3	268
SMAZ5920B	20B	5.89	6.2	6.51	60.5	1	2	700	200	4	242
SMAZ5921B	21B	6.46	6.8	7.14	55.1	1	2.5	400	200	5.2	221
SMAZ5923B	23B	7.79	8.2	8.61	45.7	0.5	5.0	700	10	6.5	183
SMAZ5924B	24B	8.64	9.1	9.56	41.2	0.5	5.0	700	10	7.0	165
SMAZ5925B	25B	9.5	10	10.5	37.5	0.25	5.0	700	10	8.0	150
SMAZ5926B	26B	10.5	11	11.6	34.1	0.25	5.5	550	5	8.4	136
SMAZ5927B	27B	11.4	12	12.6	31.2	0.25	6.5	550	1	9.1	125
SMAZ5928B	28B	12.4	13	13.7	28.8	0.25	7.0	550	1	9.9	115
SMAZ5929B	29B	14.3	15	15.8	25.0	0.25	9.0	600	1	11.4	100
SMAZ5930B	30B	15.2	16	16.8	23.4	0.25	10.0	600	1	12.2	94
SMAZ5931B	31B	17.1	18	18.9	20.8	0.25	12.0	650	1	13.7	83
SMAZ5932B	32B	19.0	20	21.0	18.7	0.25	14.0	650	1	15.2	75
SMAZ5933B	33B	20.9	22	23.1	17.0	0.25	17.5	650	1	16.7	68
SMAZ5934B	34B	22.8	24	25.2	15.6	0.25	19.0	700	1	18.2	62
SMAZ5935B	35B	25.7	27	28.4	13.9	0.25	23.0	700	1	20.6	56
SMAZ5936B	36B	28.5	30	31.5	12.5	0.25	28.0	750	1	22.8	50
SMAZ5937B	37B	31.4	33	34.7	11.4	0.25	33.0	800	1	25.1	45
SMAZ5938B	38B	34.2	36	37.8	10.4	0.25	38.0	850	1	27.4	42
SMAZ5939B	39B	37.1	39	41.0	9.6	0.25	45.0	900	1	29.7	38
SMAZ5940B	40B	40.9	43	45.2	8.7	0.25	53.0	950	1	32.7	35
SMAZ5941B	41B	44.65	47	49.35	8.0	0.25	67	1000	1	35.8	32
SMAZ5942B	42B	48.45	51	53.55	7.3	0.25	70	1100	1	38.8	29
SMAZ5943B	43B	53.2	56	58.8	6.7	0.25	86	1300	1	42.6	27
SMAZ5944B	44B	58.9	62	65.1	6.0	0.25	100	1500	1	47.1	24
SMAZ5945B	45B	64.6	68	71.4	5.5	0.25	120	1700	1	51.7	22



<b>THERMAL CHARACTERISTICS</b> ( $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNIT
Typical thermal resistance, junction to lead	$R_{\theta JL}$ <sup>(1)</sup>	50	$^\circ\text{C/W}$
Typical thermal resistance, junction to ambient	$R_{\theta JA}$ <sup>(2)</sup>	250	$^\circ\text{C/W}$

**Notes**

- (1) Mounted on PCB with 5.0 mm x 5.0 mm copper pads attached to each terminal
- (2) Mounted on minimum recommended pad layout

<b>ORDERING INFORMATION</b> (Example)				
PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
SMAZ5925B-E3/61	0.064	61	1800	7" diameter plastic tape and reel
SMAZ5925B-M3/61	0.064	61	1800	7" diameter plastic tape and reel
SMAZ5925B-E3/5A	0.064	5A	7500	13" diameter plastic tape and reel
SMAZ5925B-M3/5A	0.064	5A	7500	13" diameter plastic tape and reel

**RATINGS AND CHARACTERISTICS CURVES** ( $T_A = 25\text{ }^\circ\text{C}$  unless otherwise noted)

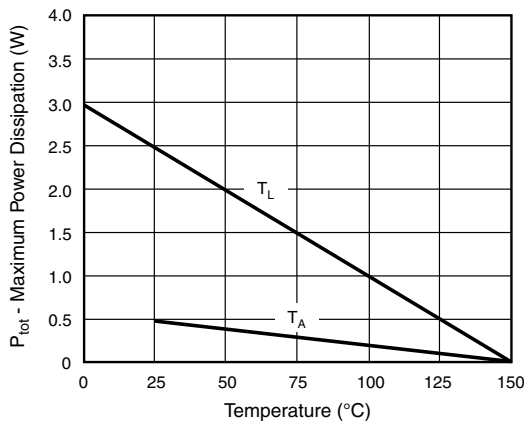


Fig. 1 - Steady State Power During

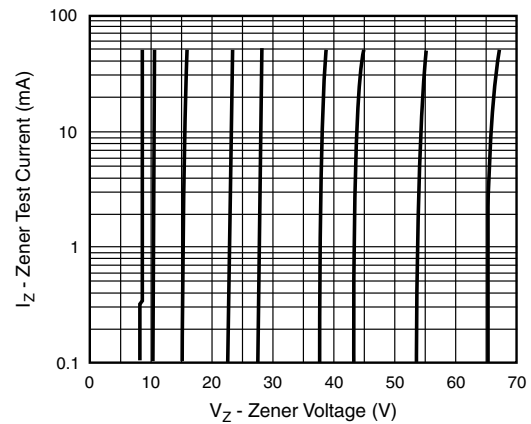


Fig. 3 - Typical Zener Voltage

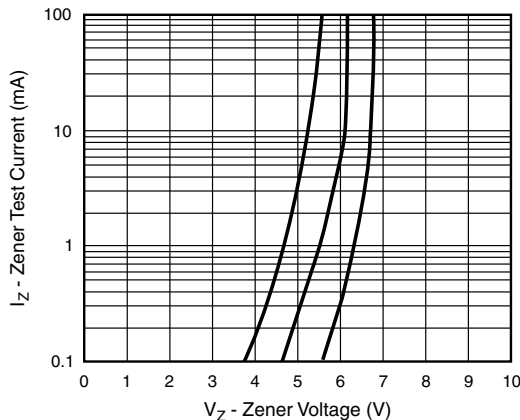


Fig. 2 - Typical Zener Voltage

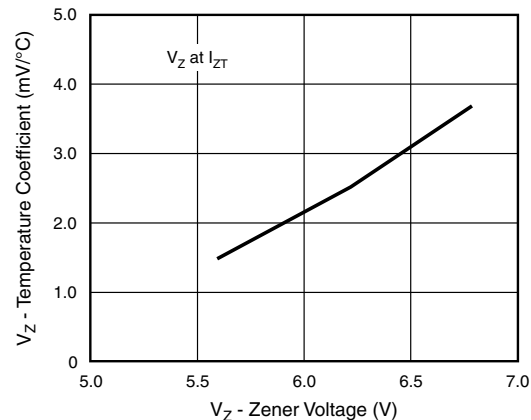


Fig. 4 - Typical Temperature Coefficients

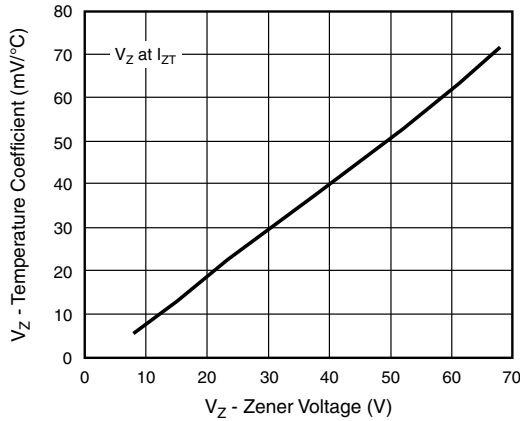


Fig. 5 - Typical Temperature Coefficients

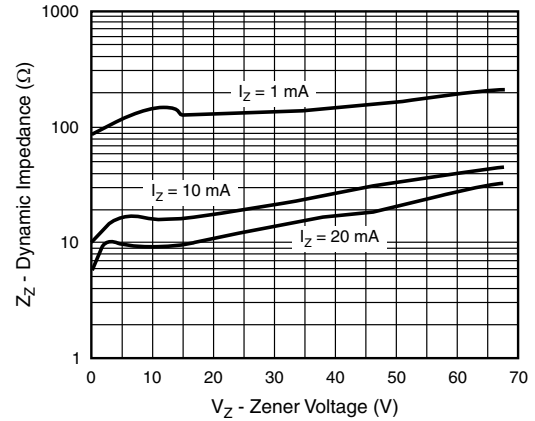


Fig. 7 - Typical Zener Impedance


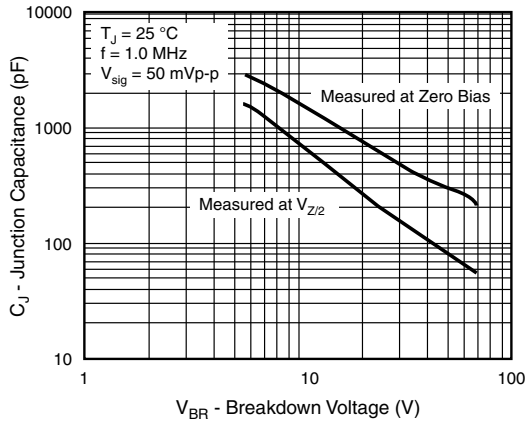



Fig. 6 - Typical Junction Capacitance

## PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

### SMA (DO-214AC)

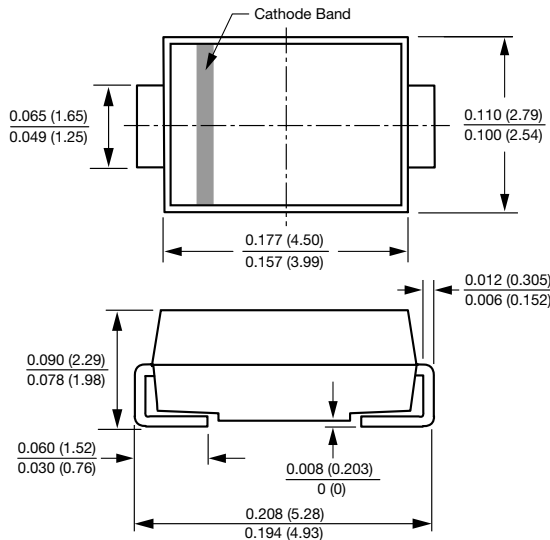

### Mounting Pad Layout

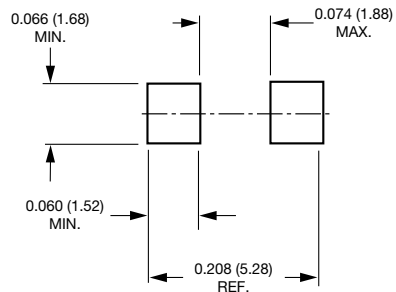



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View SMAZ5943B-M3/61 on WIN SOURCE](#)

 [Vishay Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management