




**THE DATASHEET OF  
ECS-200-20-30B-DU**



The miniature ECX-53B-DU is a compact SMD Crystal. The 5.0 x 3.2 x 0.85 mm ceramic package is ideal for communication and test equipment.

[Request a Sample](#)

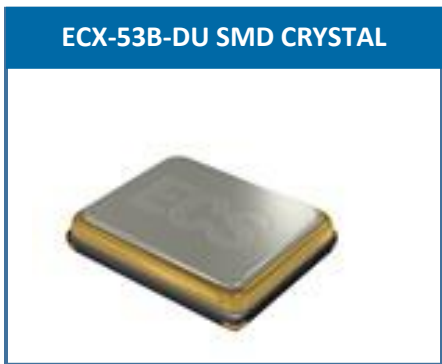

## OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS

| PARAMETERS            | CONDITIONS     | ECX-53B-DU |     |        | UNITS |
|-----------------------|----------------|------------|-----|--------|-------|
|                       |                | MIN        | TYP | MAX    |       |
| Frequency             |                | 10.000     |     | 50.000 | MHz   |
| Mode of Oscillation   | Fundamental    |            |     |        |       |
| Frequency Tolerance   | @ +25°C        |            |     | ± 30   | ppm   |
| Frequency Stability   | -55 ~ +125°C   |            |     | ± 100  | ppm   |
| Shunt Capacitance     | Co             |            |     | 5      | pF    |
| Load Capacitance      | Specify in P/N | 8          | 20  | Series | pF    |
| Drive Level           | DL             |            |     | 300    | μW    |
| Operating Temperature | Topr           | -55        |     | +125   | °C    |
| Storage Temperature   | Tstg           | -55        |     | +125   | °C    |
| Aging (First Year)    | @ +25°C ±3°C   |            |     | ±5     | ppm   |

- -55 to +125°C Temp. Range
- 5 x 3.2 mm Footprint
- Pb Free/RoHS Compliant

## DIMENSIONS (mm)

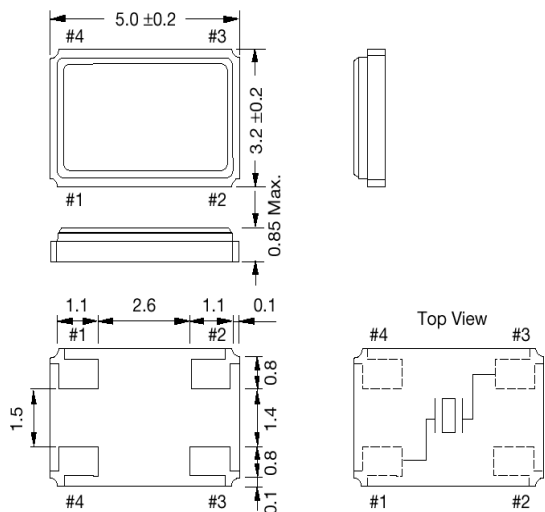


Figure 1) Top, Side, and Bottom

Crystal is symmetrical, pad 1 & 3 are interchangeable. Chamfer on the bottom pad has no electrical significance.

| Frequency (MHz) | ESR Ω Max. |
|-----------------|------------|
| 10.000 ~ 15.999 | 80         |
| 16.000 ~ 19.999 | 50         |
| 20.000 ~ 23.999 | 40         |
| 24.000 ~ 50.000 | 30         |

| Pad Connections |        |
|-----------------|--------|
| 1               | In/Out |
| 2               | Gnd    |
| 3               | Out/In |
| 4               | Gnd    |





Figure 2) Suggested land

## PART NUMBERING GUIDE: Example ECS-200-20-30B-DU-TR

| ECS - FREQUENCY ABBREVIATION | LOAD CAPACITANCE                  | PACKAGE          | Stability    | Temp Range       | PACKAGING                         |
|------------------------------|-----------------------------------|------------------|--------------|------------------|-----------------------------------|
| ECS                          | 200 = 20.000 MHz<br>See P/N Guide | 30B =<br>ECX-53B | D = ±100 ppm | U = -55 ~ +125°C | TR =<br>Tape<br>& Reel<br>1K/Reel |

**POCKET TAPE DIMENSIONS (mm)**

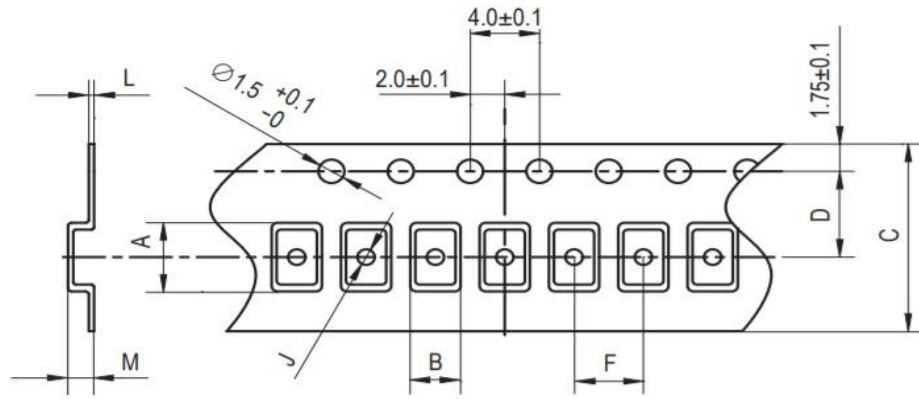

| A   | B   | C    | D   | F   | J   | L    | M   | Reel Dia. | Qty/Reel |
|-----|-----|------|-----|-----|-----|------|-----|-----------|----------|
| 5.4 | 3.5 | 12.0 | 5.5 | 8.0 | 1.6 | 0.25 | 1.0 | 180       | 1000pcs  |

| SOLDER PROFILE                          |  |
|---|--|
| Peak solder Temp +260°C Max 10 sec Max. |  |
| 2 Cycles Max.                           |  |
| MSL 1, Lead Finish Au                   |  |

| DEVELOPED FREQUENCIES |                 |
|-----------------------|-----------------|
| Abbreviation          | Frequency (MHZ) |
| 100                   | 10.000          |
| 120                   | 12.000          |
| 143                   | 14.31818        |
| 147.4                 | 14.7456         |
| 160                   | 16.000          |
| 200                   | 20.000          |
| 240                   | 24.000          |
| 250                   | 25.000          |
| 270                   | 27.000          |
| 300                   | 30.000          |
| 320                   | 32.000          |
| 400                   | 40.000          |
| 480                   | 48.000          |

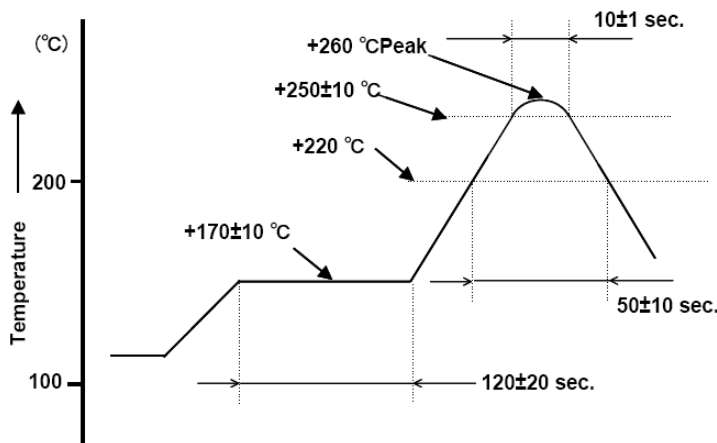




Figure 1) Suggested Reflow Profile

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View ECS-200-20-30B-DU on WIN SOURCE](#)
-  [ECS Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management