





**THE DATASHEET OF
DSSK30-018A**



Power Schottky Rectifier with common cathode

$I_{FAV} = 2 \times 15 \text{ A}$
 $V_{RRM} = 180 \text{ V}$
 $V_F = 0.72 \text{ V}$

V_{RSM}	V_{RRM}	Type
V	V	
180	180	DSSK 30-018A

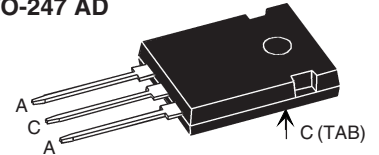
TO-247 AD


A = Anode, C = Cathode, TAB = Cathode

Symbol	Conditions	Maximum Ratings	
I_{FRMS}		50	A
I_{FAV}	$T_C = 150^\circ\text{C}$; rectangular, $d = 0.5$	15	A
I_{FAV}	$T_C = 150^\circ\text{C}$; rectangular, $d = 0.5$; per device	30	A
I_{FSM}	$T_{VJ} = 45^\circ\text{C}$; $t_p = 10 \text{ ms}$ (50 Hz), sine	120	A
E_{AS}	$I_{AS} = 2 \text{ A}$; $L = 100 \mu\text{H}$; $T_{VJ} = 25^\circ\text{C}$; non repetitive	0.2	mJ
I_{AR}	$V_A = 1.5 \cdot V_{RRM}$ typ.; $f = 10 \text{ kHz}$; repetitive	0.2	A
$(dv/dt)_{cr}$		1000	V/ μs
T_{VJ}		-55...+175	$^\circ\text{C}$
T_{VJM}		175	$^\circ\text{C}$
T_{stg}		-55...+150	$^\circ\text{C}$
P_{tot}	$T_C = 25^\circ\text{C}$	90	W
M_d	mounting torque	0.8...1.2	Nm
Weight	typical	6	g

Features

- International standard package
- Very low V_F
- Extremely low switching losses
- Low I_{RM} -values
- Epoxy meets UL 94V-0

Applications

- Rectifiers in switch mode power supplies (SMPS)
- Free wheeling diode in low voltage converters

Advantages

- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching
- Low losses

Symbol	Conditions	Characteristic Values	
		typ.	max.
I_R ①	$T_{VJ} = 25^\circ\text{C}$ $V_R = V_{RRM}$		0.3 mA
	$T_{VJ} = 100^\circ\text{C}$ $V_R = V_{RRM}$		2.5 mA
V_F	$I_F = 15 \text{ A}$; $T_{VJ} = 125^\circ\text{C}$		0.72 V
	$I_F = 15 \text{ A}$; $T_{VJ} = 25^\circ\text{C}$		0.86 V
	$I_F = 30 \text{ A}$; $T_{VJ} = 125^\circ\text{C}$		0.87 V
R_{thJC}		1.7	K/W
R_{thCH}	0.25		K/W

Pulse test: ① Pulse Width = 5 ms, Duty Cycle < 2.0 %
Data according to IEC 60747 and per diode unless otherwise specified.

Dimensions see Outlines.pdf

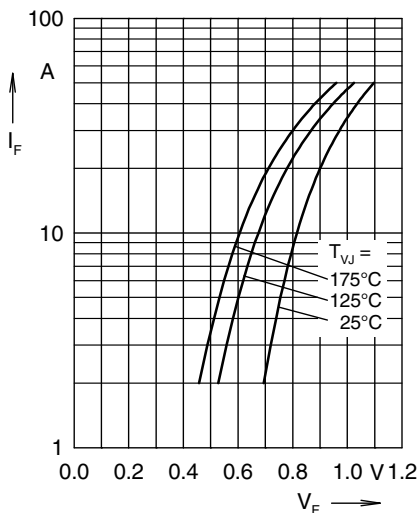


Fig. 1 Max. forward voltage drop characteristics

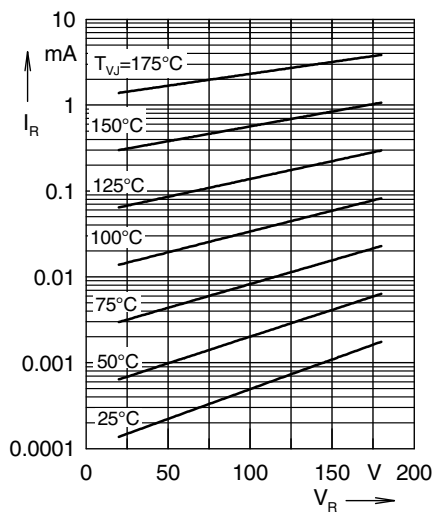


Fig. 2 Typ. value of reverse current I_R vs. reverse voltage V_R

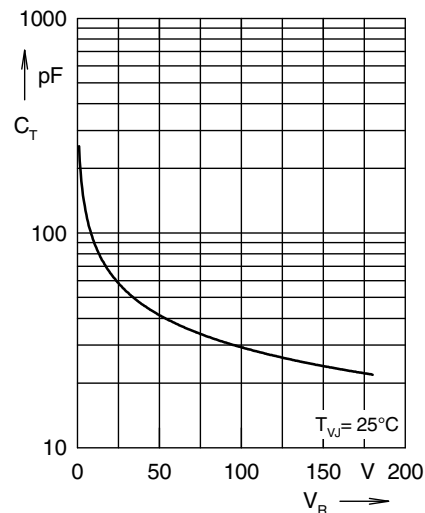


Fig. 3 Typ. junction capacitance C_T vs. reverse voltage V_R

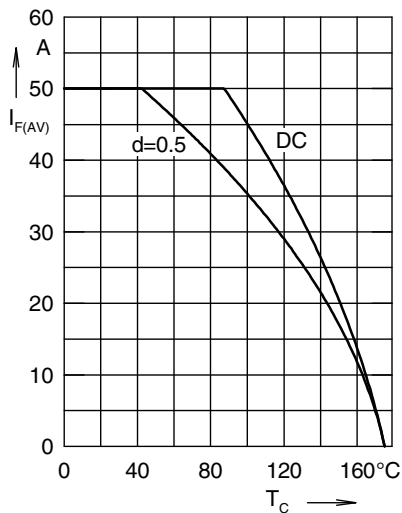


Fig. 4 Average forward current $I_{F(AV)}$ vs. case temperature T_C

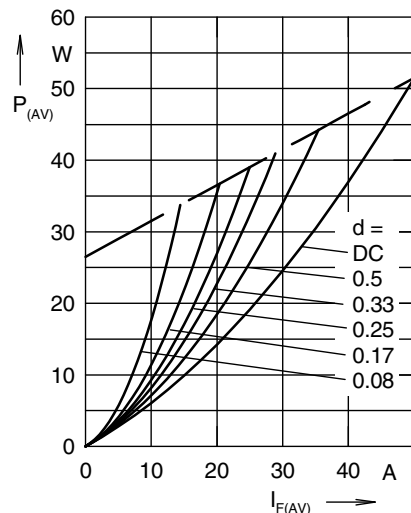


Fig. 5 Forward power loss characteristics

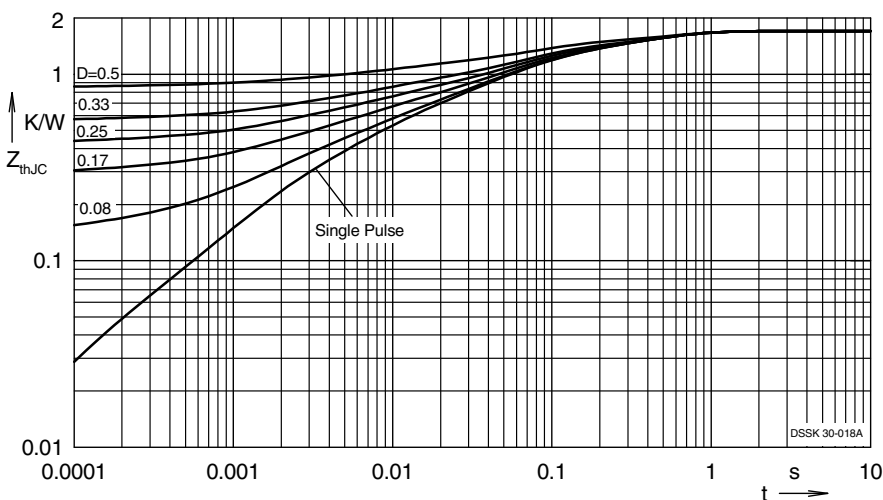


Fig. 6 Transient thermal impedance junction to case at various duty cycles





Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View DSSK30-018A on WIN SOURCE](#)

 [IXYS Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management