

1422006-1 ✓ ACTIVE

Axicom | Axicom P2 Signal Relay

TE Internal #: 1422006-1

General Purpose Signal Relay, DC, Polarized, Monostable, 2 Form C DPDT-CO, 2 A Contact Rating, 5 VDC Coil Voltage, Axicom P2 Signal Relay

[View on TE.com >](#)



Relays & Contactors > Electromechanical Relays > Signal Relay with Dielectric Strength



Relay & Contactor Type: **General Purpose Signal Relay**

Coil Magnetic System: **Polarized, Monostable**

Contact Arrangement: **2 Form C DPDT-CO**

Current Type: **DC**

Contact Current Rating: **2 A**

[All Signal Relay with Dielectric Strength \(3\)](#)

## Features

### Product Type Features

Relay & Contactor Type	General Purpose Signal Relay
------------------------	------------------------------

### Configuration Features

Contact Special Features	Bifurcated/Twin Contacts
Contact Number of Poles	2
Coil Special Features	Overmolded Coil
Contact Arrangement	2 Form C DPDT-CO

### Electrical Characteristics

Contact Limiting Short-Time Current	2 A
Contact Limiting Making Current	2 A
Contact Limiting Continuous Current	2 A
Contact Limiting Breaking Current	2 A
Insulation Initial Dielectric Between Open Contacts	1500 Vrms



Insulation Initial Dielectric Between Adjacent Contacts	1000 Vrms
Contact Switching Voltage (Max)	250 VAC
Contact Switching Load (Min)	10mA @ .2V
Voltage Standing Wave Ration (HF Parameter)	1.04db @ 100MHz, 1.4dB @ 900MHz
Coil Resistance	125 $\Omega$
Insulation Initial Resistance	1000 M $\Omega$
Contact Current Rating	2 A
Coil Voltage Rating	5 VDC
Contact Voltage Rating	220 VDC
Coil Power Rating DC	.2 W
Insulation Initial Dielectric Between Contacts & Coil	1500 Vrms

### Signal Characteristics

Isolation (HF Parameter)	-20.7dB @ 900MHz, -39dB @ 100MHz
Insertion Loss (HF Parameter)	-.02dB @ 100MHz, -.27dB @ 900MHz

### Body Features

Product Weight	2.8 g[.0988 oz]
Enclosure Type	Flux Resistant Automatic Solder Capable & Washable

### Contact Features

Contact Plating Material	Gold
Contact Material	AgNi

### Termination Features

Main Termination & Connection Type	PCB SMT
Coil Termination & Connection Type	PCB SMT

### Mechanical Attachment

Product Mount Type	Board Mount
--------------------	-------------

### Dimensions

Insulation Clearance Between Contact & Coil	1.3 mm[.051 in]
Insulation Creepage Between Contact & Coil	2.5 mm[.098 in]
Product Width	7.2 mm[.283 in]
Product Length	14.6 mm[.574 in]
Product Height	9.9 mm[.389 in]



### Usage Conditions

Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
Environmental Category of Protection	RTIII
Environmental Ambient Temperature (Max)	85 °C[185 °F]

### Operation/Application

Solder Process	Reflow Solder Capable
Performance Type	High Dielectric
Coil Magnetic System	Polarized, Monostable
Current Type	DC

### Packaging Features

Packaging Method	Reel
------------------	------

### Other

Coil Power Rating Class	>.15 – ≤.2 W
Contact Current Class	≤2 A
Height Class (Mechanical)	>7 – ≤11 mm[>.276 – ≤.433 in]
Length Class (Mechanical)	>11 – ≤16 mm[>.433 – ≤.63 in]
Width Class (Mechanical)	>7 – ≤11 mm[>.276 – ≤.433 in]

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 245°C

#### Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as

EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



## Also in the Series | Axicom P2 Signal Relay

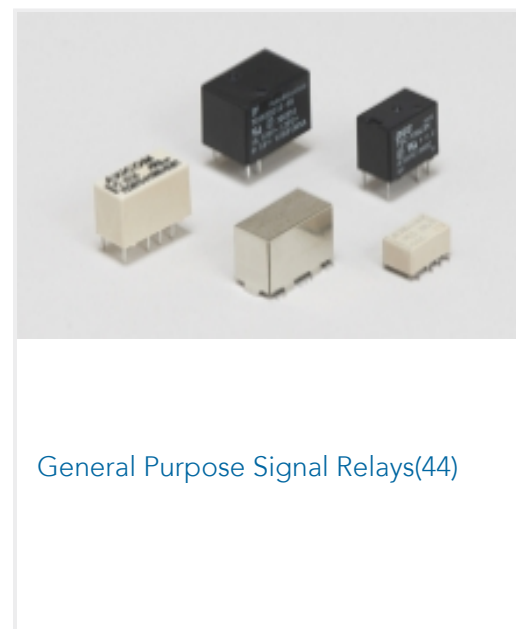

## Customers Also Bought





TE Part #7-1879337-6  
CPF 0603 15K 1% 50PPM 1K RL



TE Part #7-1879499-3  
CRGH2010 5% 1K0 1W



TE Part #2176071-2  
3521 150K 1% 2W



TE Part #2-2176327-0  
CRGP 0805 390R 1%



TE Part #9-2176404-4  
3550 82R 5%



TE Part #5413879-1  
JACK ASSY,RTANG,BNC

## Documents

### Product Drawings

[V23079G2001X071](#)

English

### CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_1422006-1\\_D1.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_1422006-1\\_D1.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_1422006-1\\_D1.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Datasheets & Catalog Pages

[Axicom Signal and High Frequency Relays \(RF Switches\) APPLICATION NOTE #2](#)

English

[Transportation, Storage, Handling, Assembly and Testing of AXICOM SMT Relays](#)

English

[P2 Relay Datasheet](#)

English

### Product Specifications



## Definitions General Purpose Relays

English

---

## Agency Approvals

UL

English

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

[View 1422006-1 on WIN SOURCE](#)

[TE Connectivity Information](#)

### Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management