



**THE DATASHEET OF  
PTS641 SM25 SMTR2 LFS**



### Product Overview

Qorvo's QPA1019 is a packaged high-power, C-band amplifier fabricated on Qorvo's production 0.15 um GaN on SiC process (QGaN15). Covering 4.5–7.0 GHz, the QPA1019 provides greater than 10 W of saturated output power and 19 dB of large-signal gain while achieving greater than 39% power-added efficiency.

The QPA1019 is packaged in a plastic overmold QFN with a Cu paddle offering easy handling with good thermal properties. As a result, the QPA1019 has bias flexibility allowing the user to vary the voltage to achieve optimum system performance while maintaining high reliability.

The QPA1019 is matched to 50 ohms with integrated DC blocking caps on both I/O ports. With the high performance, good thermal characteristics and ease of handling and system integration, the QPA1019 is ideal for radar and satellite communication systems.

Lead-free and RoHS compliant.




### Key Features

- Frequency Range: 4.5–7.0 GHz
- $P_{SAT}$  ( $P_{IN}=22$  dBm): > 40 dBm
- PAE ( $P_{IN}=22$  dBm): > 40 %
- Power Gain ( $P_{IN}=22$  dBm): > 19 dB
- Integrated Power Detector
- Bias:  $V_D = 22$  V,  $I_{DQ} = 290$  mA,  $V_G = -2.5$  V typical
- Package Dimensions: 5.0 x 5.0 x 0.85 mm

*Performance is typical across frequency. Please reference electrical specification table and data plots for more details.*

### Functional Block Diagram

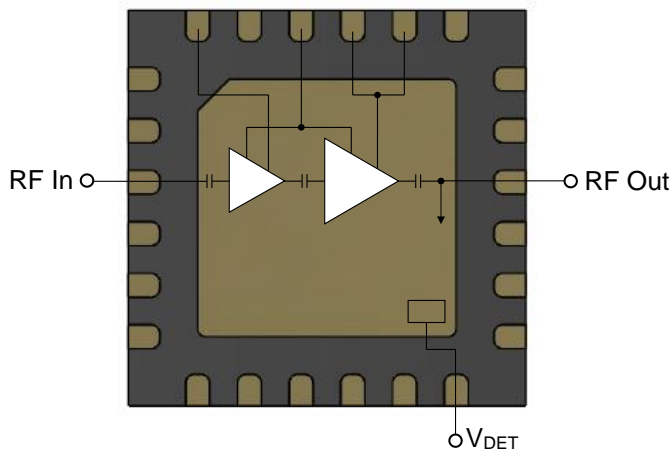

### Applications

- C-Band Radar
- Satellite Communication

### Ordering Information

Part No.	Description
QPA1019	4.5 – 7.0GHz 10W GaN Power Amplifier
QPA1019S2	Samples (2 pcs. pack)
QPA1019TR7	250 pieces on a 7" reel (standard)
QPA1019EVB	Evaluation Board for QPA1019

### Absolute Maximum Ratings


Parameter	Value / Range
Drain Voltage ( $V_D$ )	29.5
Gate Voltage Range ( $V_G$ )	-6 to 0 V
Drain Current ( $I_{D1}$ , $I_{D2}$ )	0.52, 2.0 A
Gate Current ( $I_G$ )	See chart
Power Dissipation ( $P_{DISS}$ ), CW, 85°C	25.2 W
Input Power ( $P_{IN}$ ), CW, 50 $\Omega$ , $V_D=22$ V, $I_{DQ}=290$ mA, 85 °C	28 dBm
Input Power ( $P_{IN}$ ), CW, 4:1 VSWR, $V_D=22$ V, $I_{DQ}=290$ mA, 85 °C	25 dBm
Channel Temperature ( $T_{CH}$ )	275 °C
Mounting Temperature (30 seconds)	260 °C
Storage Temperature	-55 to 150 °C

Operation of this device outside the parameter ranges given above may cause permanent damage. These are stress ratings only, and functional operation of the device at these conditions is not implied.

### Recommended Operating Conditions

Parameter	Min	Typ	Max	Units
Drain Voltage ( $V_D$ )		+22		V
Drain Current, Quiescent ( $I_{DQ}$ )		290		mA
Drain Current, RF ( $I_{D\_Drive}$ )	See charts page 3 - 8			mA
Gate Voltage Typ. Range ( $V_G$ )	-2 to -2.8			V
Gate Current, RF ( $I_{G\_Drive}$ )	See charts page 5 - 8			mA
Operating Temp. Range	-40	+25	+85	°C

Electrical specifications are measured at specified test conditions. Specifications are not guaranteed over all recommended operating conditions.

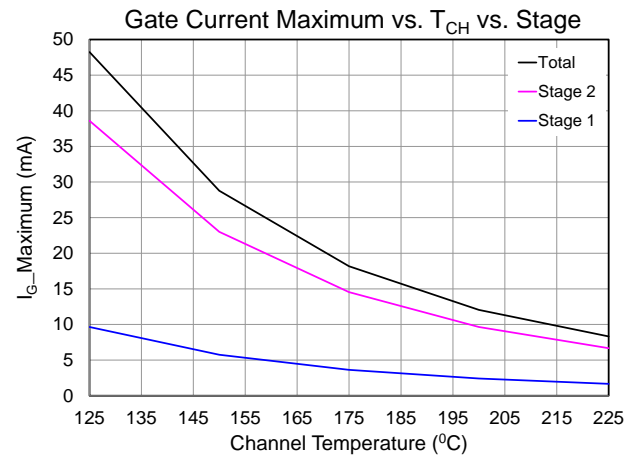

### Electrical Specifications







Parameter	Conditions <sup>(1)</sup> <sup>(2)</sup>	Min	Typ	Max	Units
Operational Frequency Range		4.5		7.0	GHz
Output Power at Saturation, $P_{SAT}$	$P_{IN} = +22$ dBm	39	41		dBm
Power Added Efficiency, PAE	$P_{IN} = +22$ dBm; Frequency = 4.5 – 5.5 GHz	35	45		%
	$P_{IN} = +22$ dBm; Frequency = 6.0 – 7.0 GHz		40		
Small Signal Gain, $S_{21}$			30		dB
Input Return Loss, IRL			15		dB
Output Return Loss, ORL			7		dB
3 <sup>RD</sup> Intermodulation Products, IM3	$P_{OUT/TONE} = +32$ dBm; Frequency = 5.7 GHz		-25		dBc
$P_{SAT}$ Temperature Coefficient	$T_{DIFF} = +25^{\circ}C$ to $+85^{\circ}C$ ; $P_{IN} = +22$ dBm		-0.007		dBm/°C
$S_{21}$ Temperature Coefficient	$T_{DIFF} = -40^{\circ}C$ to $+85^{\circ}C$		-0.050		dB/°C

**Notes:**

1. Test conditions unless otherwise noted: CW,  $V_D = 22$  V,  $I_{DQ} = 290$  mA,  $V_G = -2.5V$  +/- typical,  $T_{BASE} = +25$  °C,  $Z_0 = 50$   $\Omega$
2.  $T_{BASE}$  is back side of package







**Performance Plots – Large Signal**

Test conditions unless otherwise noted: **CW**  $V_D = 22\text{ V}$ ,  $I_{DQ} = 290\text{ mA}$ , CW input power,  $T = +25\text{ }^\circ\text{C}$

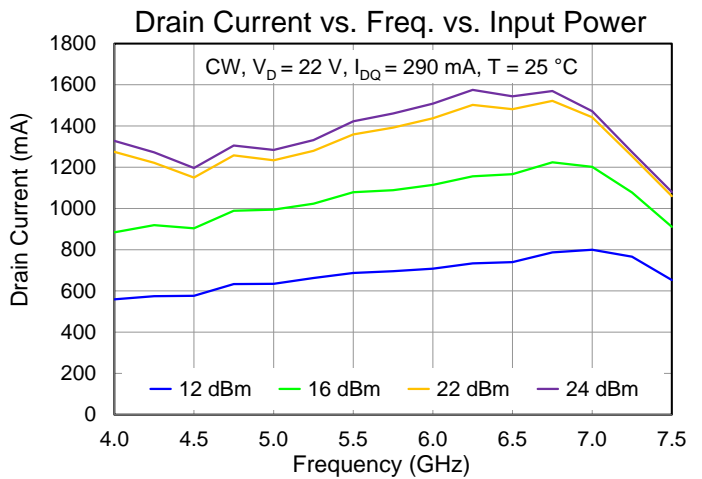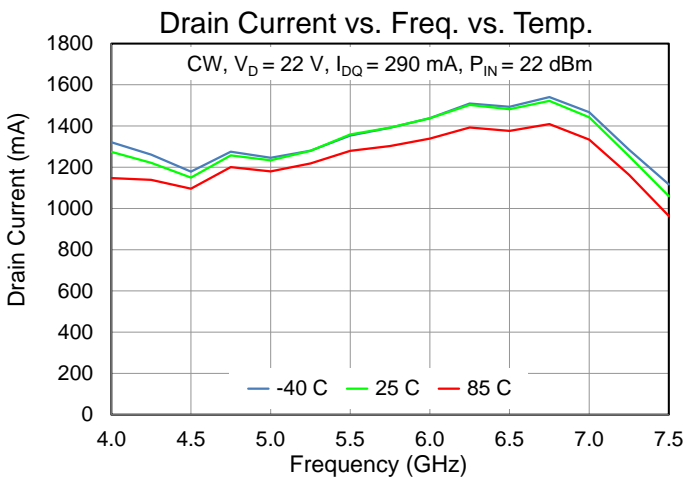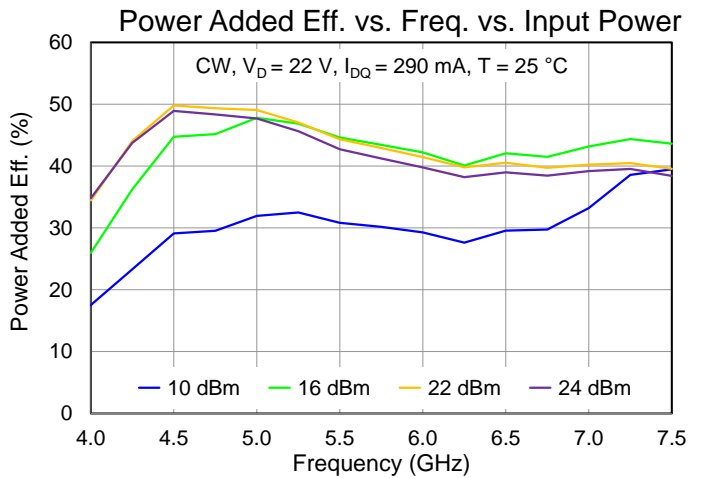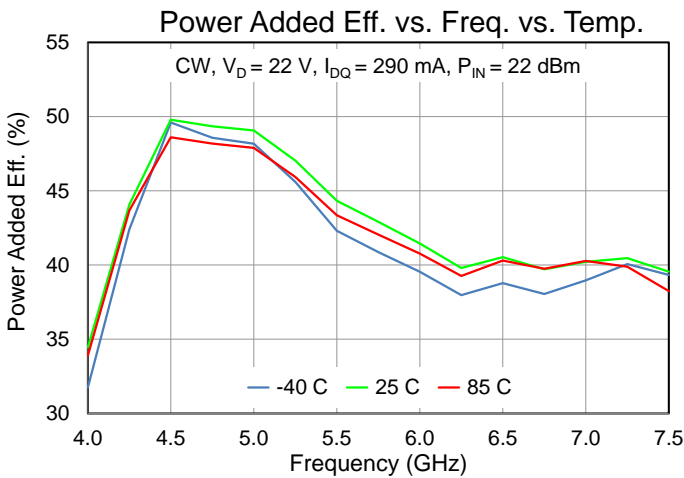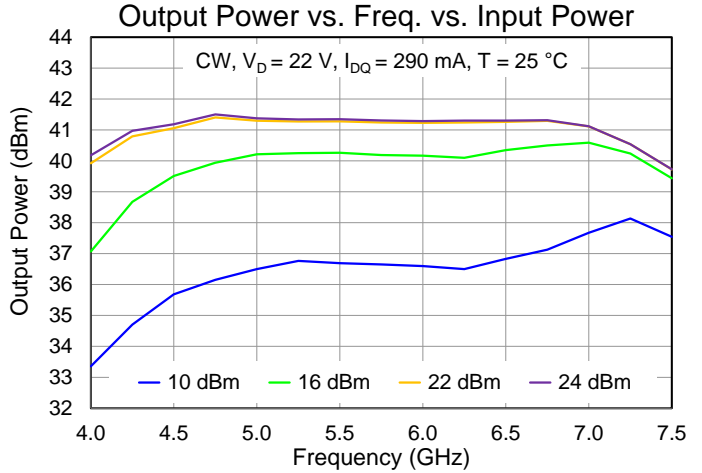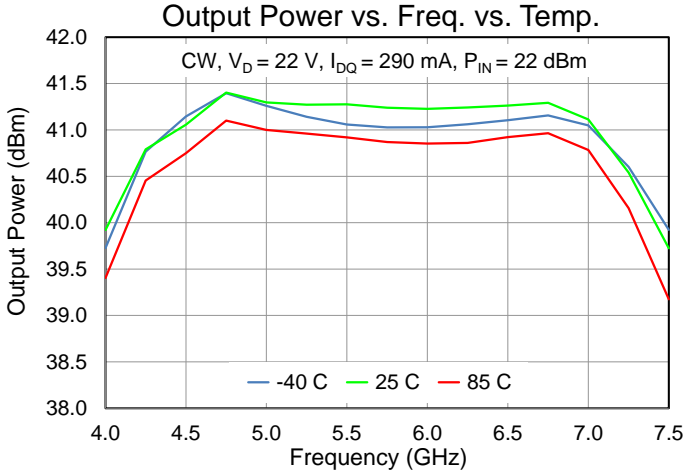






## Performance Plots – Large Signal

Test conditions unless otherwise noted: **CW**  $V_D = 22\text{ V}$ ,  $I_{DQ} = 290\text{ mA}$ , CW input power,  $T = +25\text{ }^\circ\text{C}$

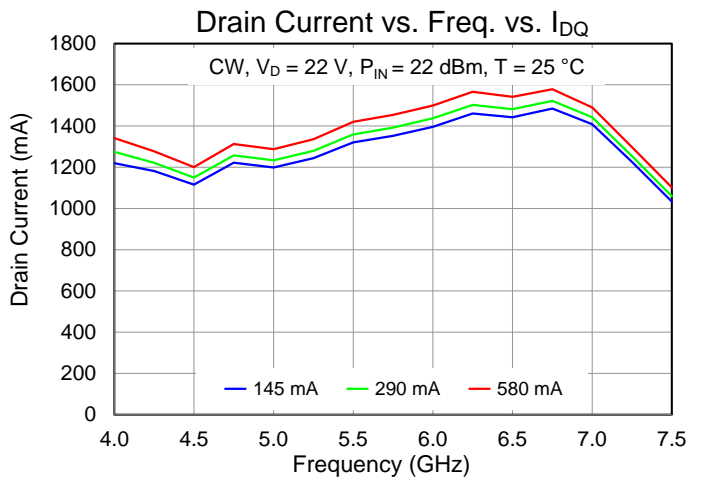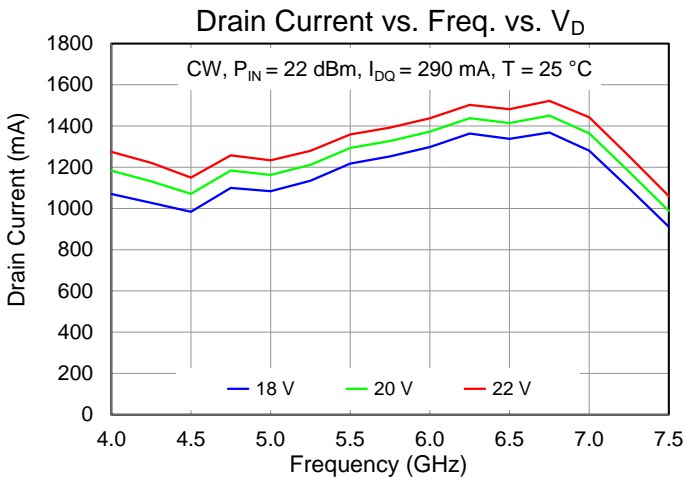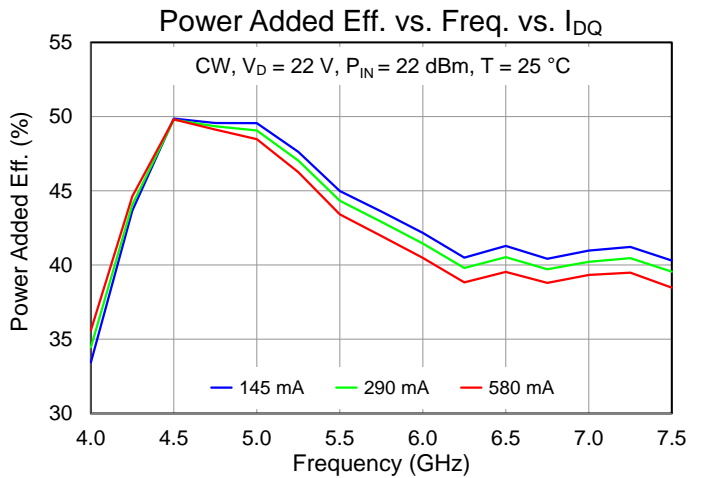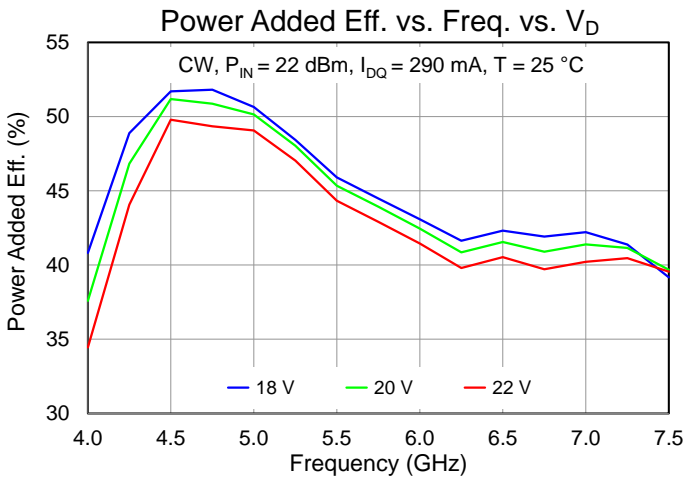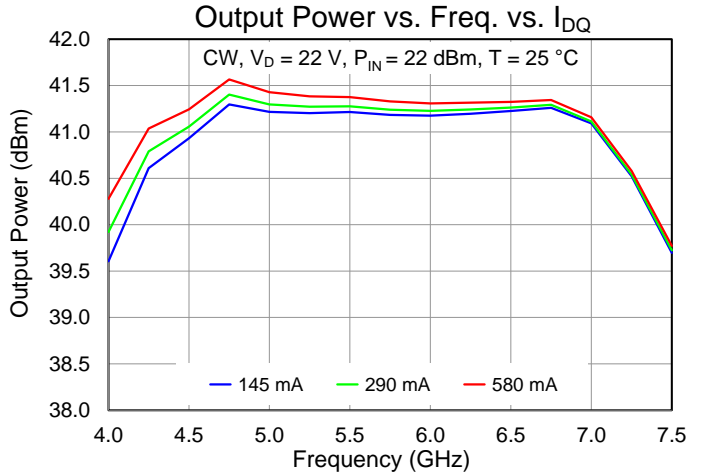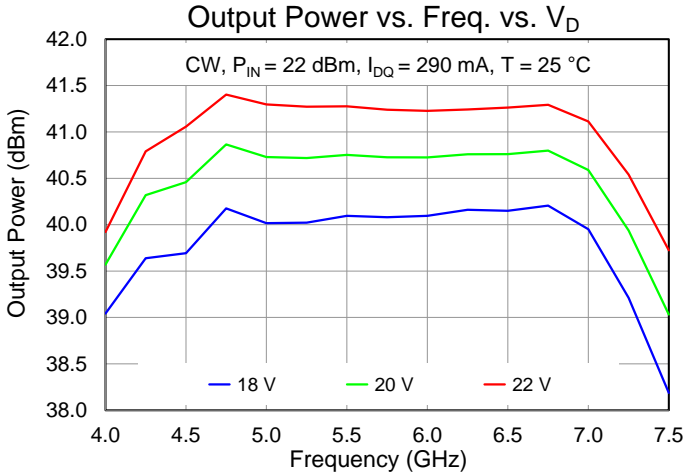






Performance Plots – Large Signal

Test conditions unless otherwise noted: CW  $V_D = 22\text{ V}$ ,  $I_{DQ} = 290\text{ mA}$ , CW input power,  $T = +25\text{ }^\circ\text{C}$

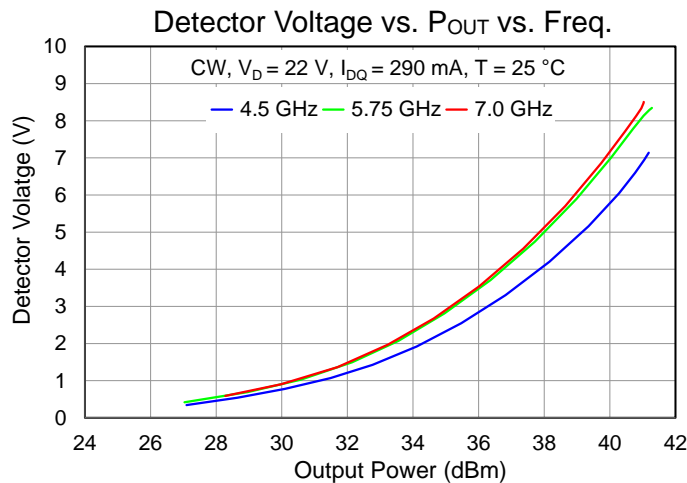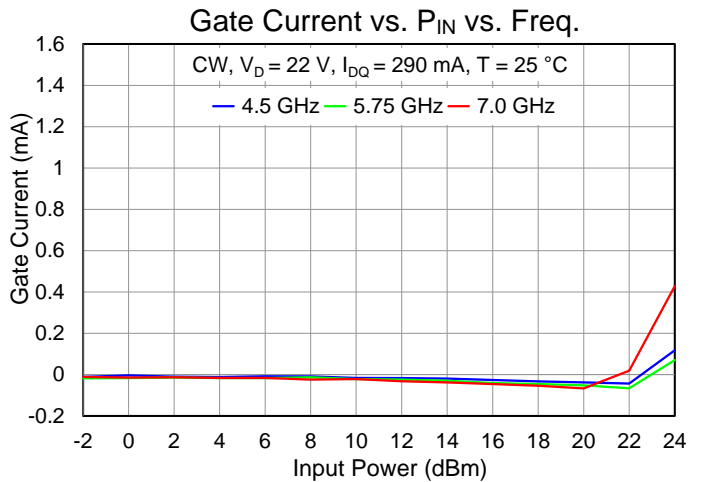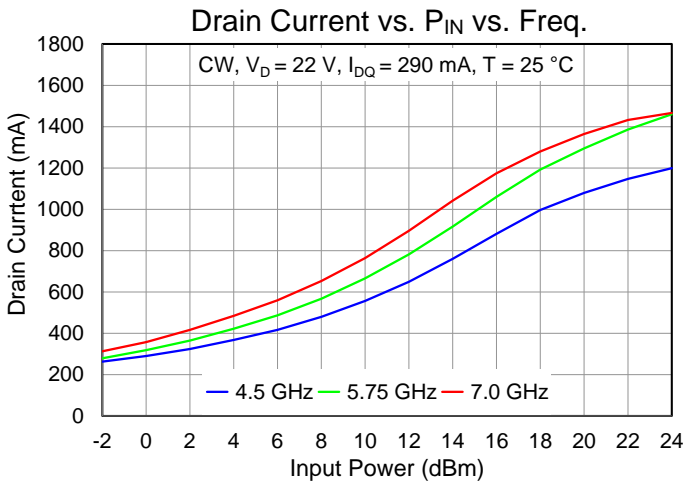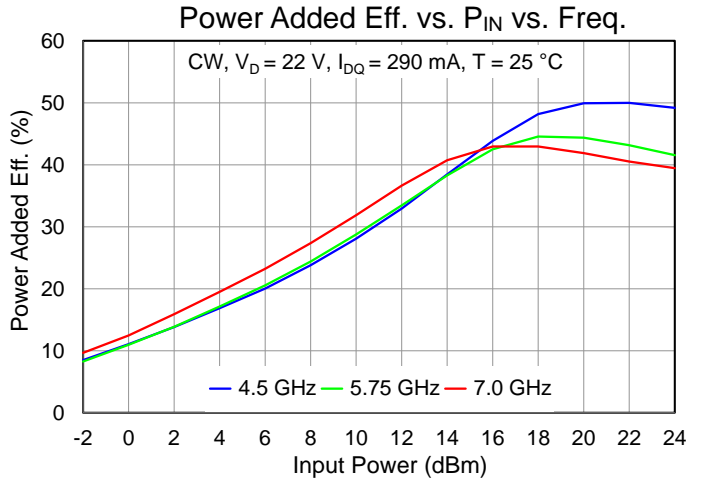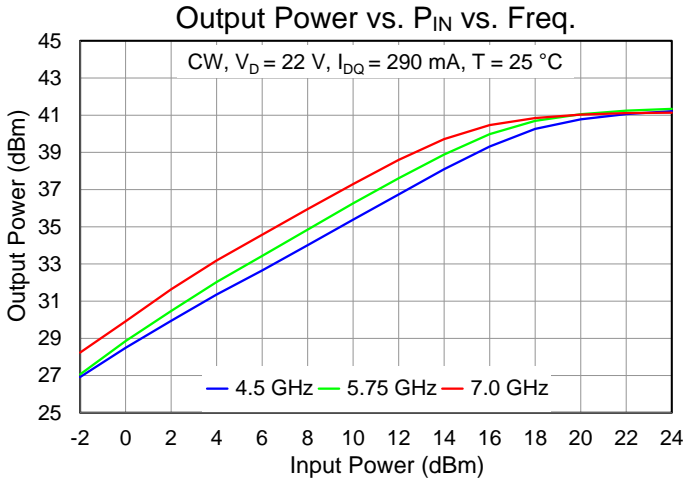





Performance Plots – Large Signal

Test conditions unless otherwise noted: CW,  $V_D = 22\text{ V}$ ,  $I_{DQ} = 290\text{ mA}$ , CW input power,  $T = +25\text{ }^\circ\text{C}$

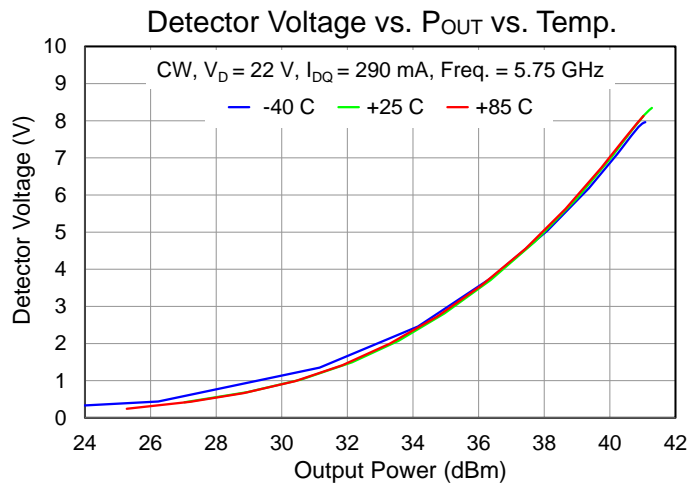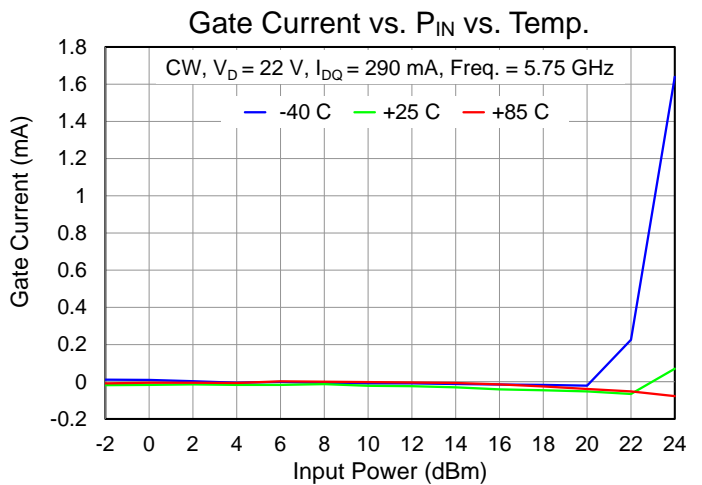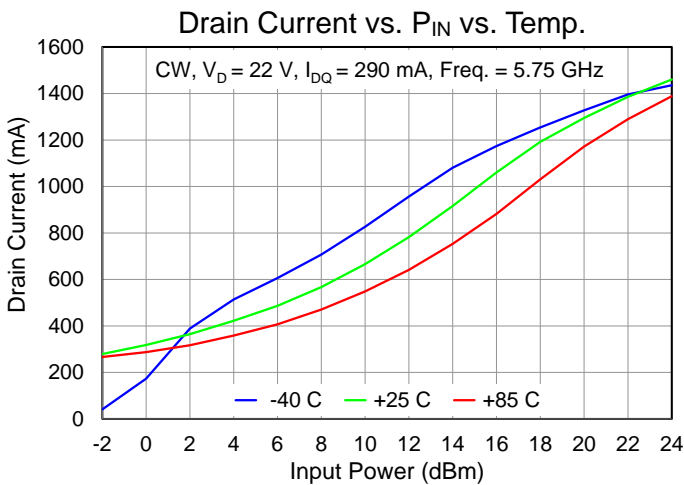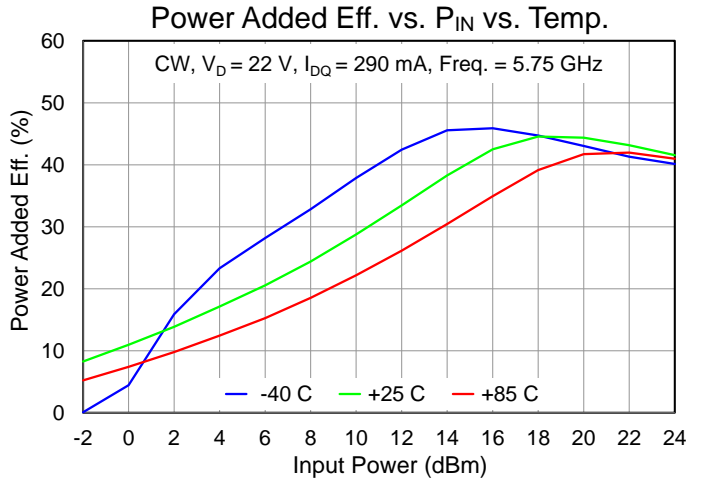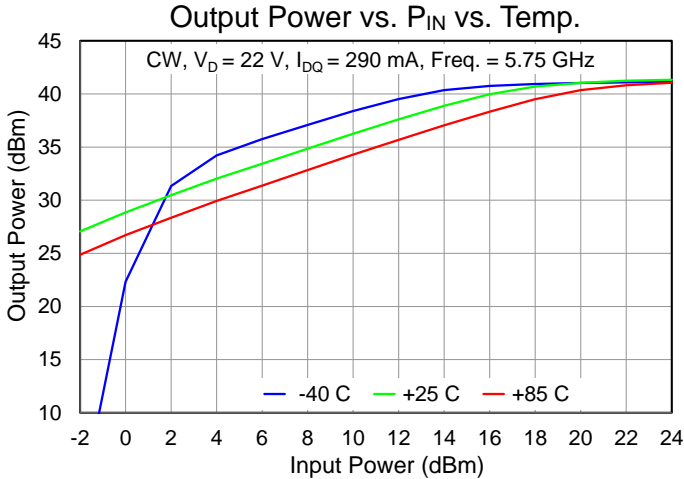





Performance Plots – Large Signal

Test conditions unless otherwise noted: CW  $V_D = 22\text{ V}$ ,  $I_{DQ} = 290\text{ mA}$ , CW input power,  $T = +25\text{ }^\circ\text{C}$

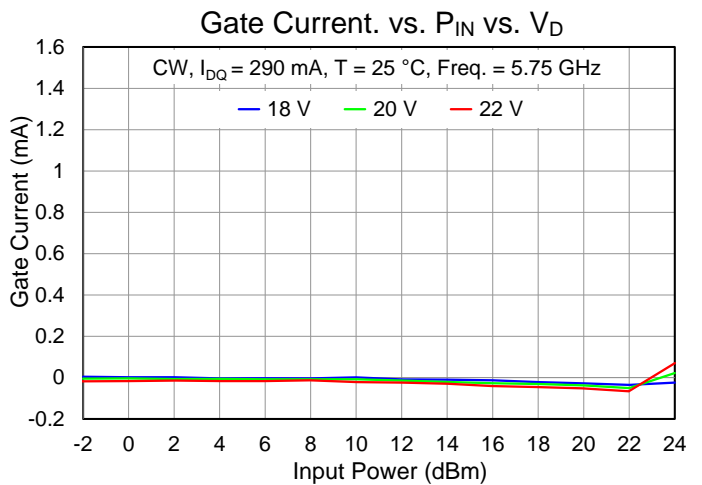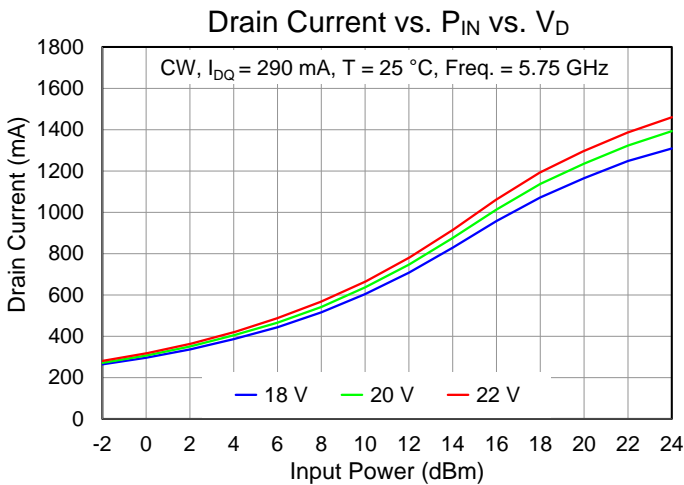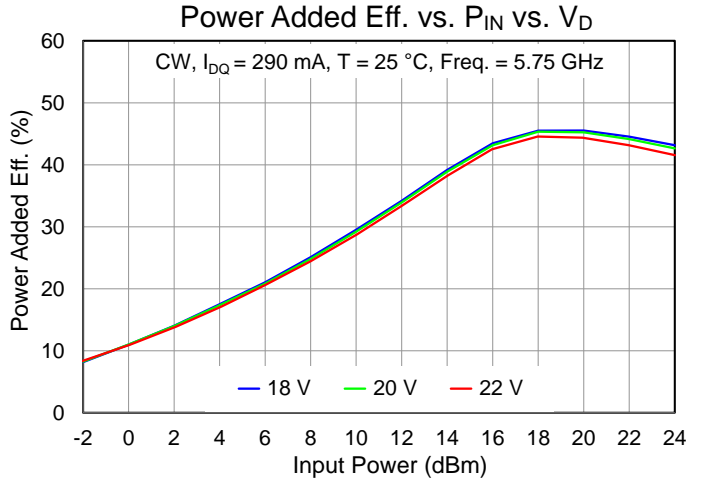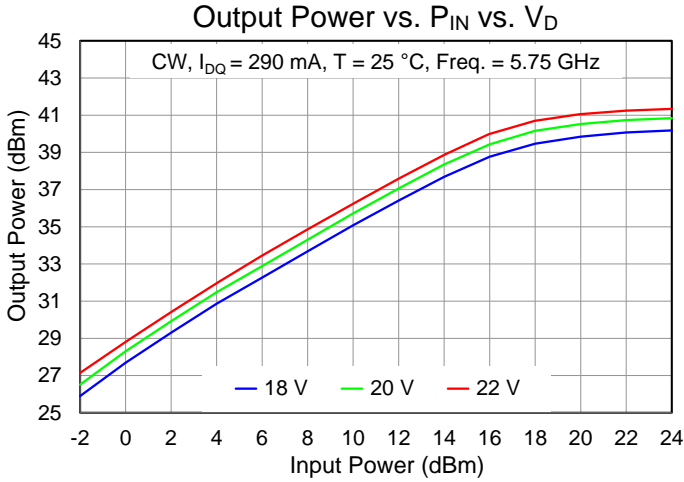







## Performance Plots – Large Signal

Test conditions unless otherwise noted: **CW**  $V_D = 22\text{ V}$ ,  $I_{DQ} = 290\text{ mA}$ , CW input power,  $T = +25\text{ }^\circ\text{C}$

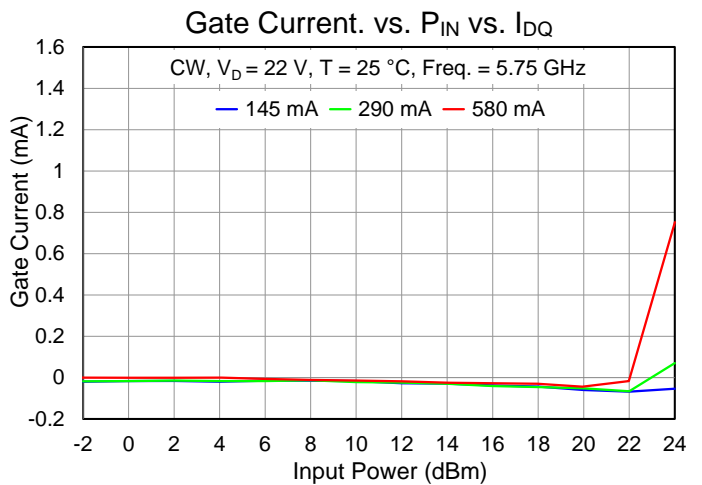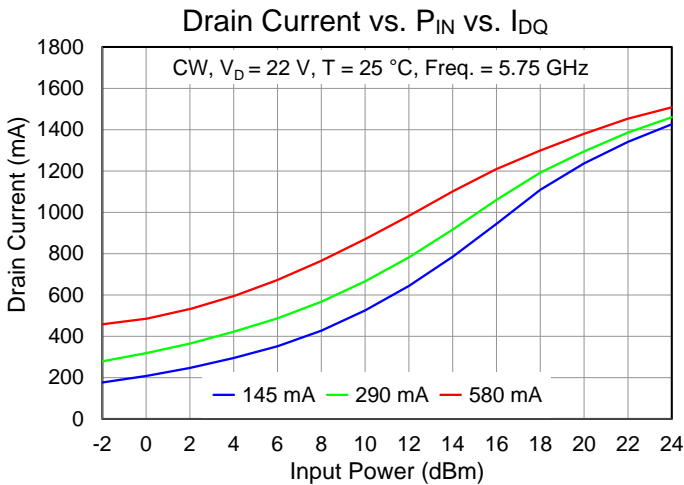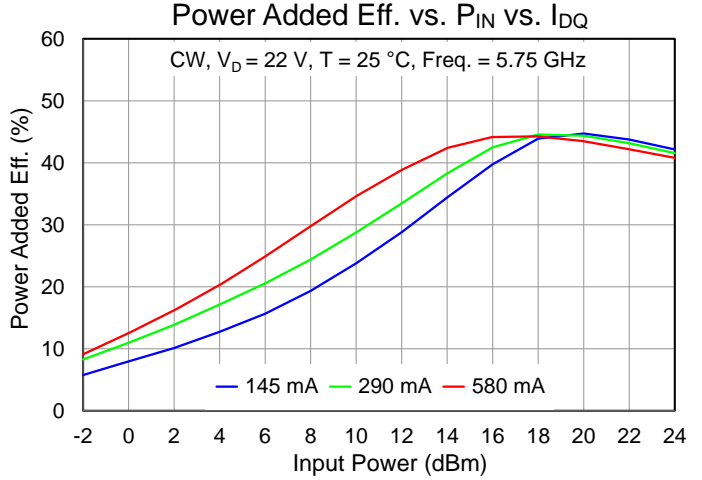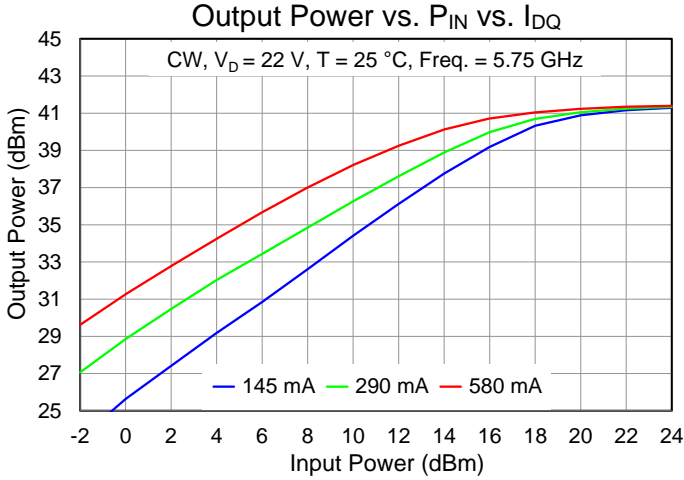







## Performance Plots – Large Signal

Test conditions unless otherwise noted: **Pulsed**  $V_D = 22\text{ V}$ ,  $I_{DQ} = 290\text{ mA}$ , Duty Cycle = 10%, PW = 100 us, CW input power,  $T = +25\text{ }^\circ\text{C}$

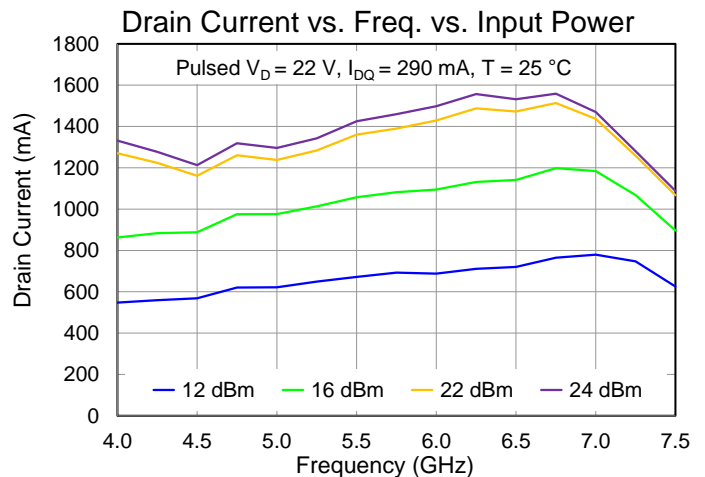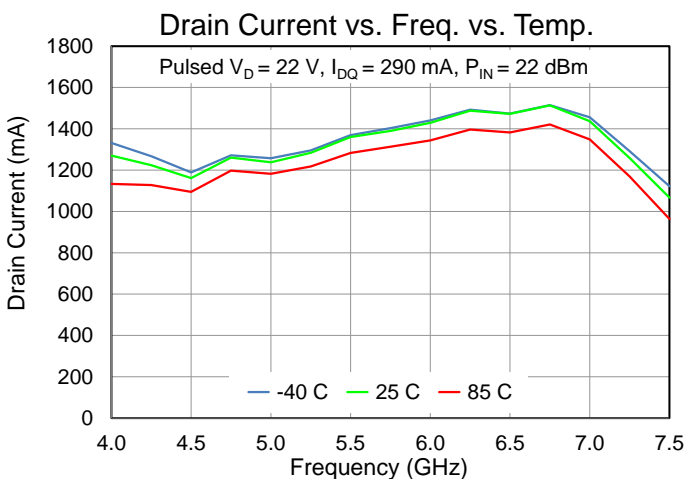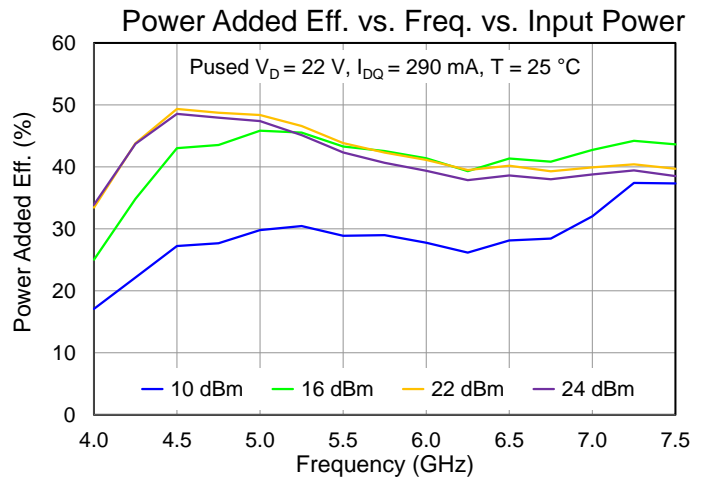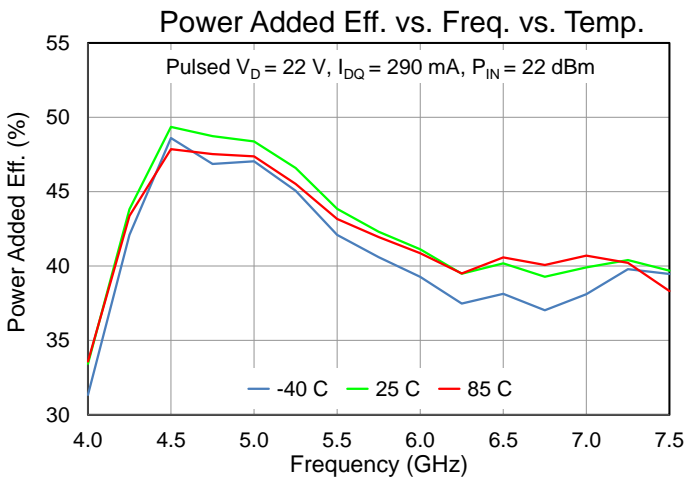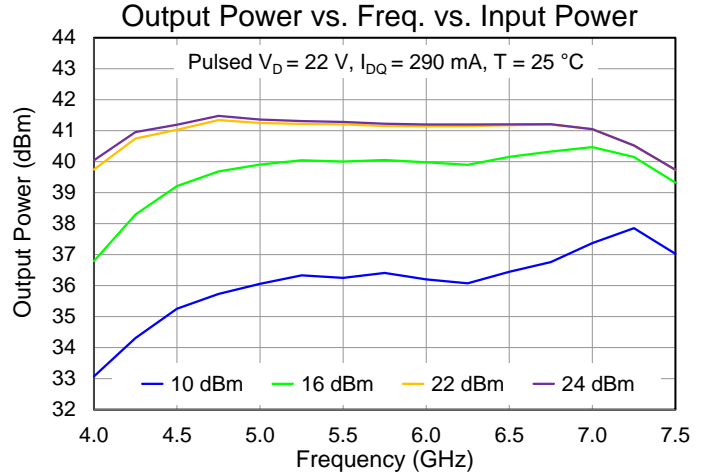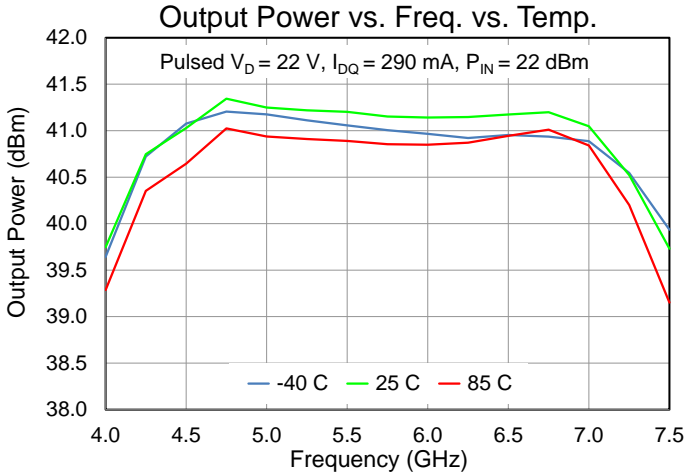







## Performance Plots – Large Signal

Test conditions unless otherwise noted: Pulsed  $V_D = 22$  V,  $I_{DQ} = 290$  mA, Duty Cycle = 10%, PW = 100 us CW input power,  $T = +25$  °C

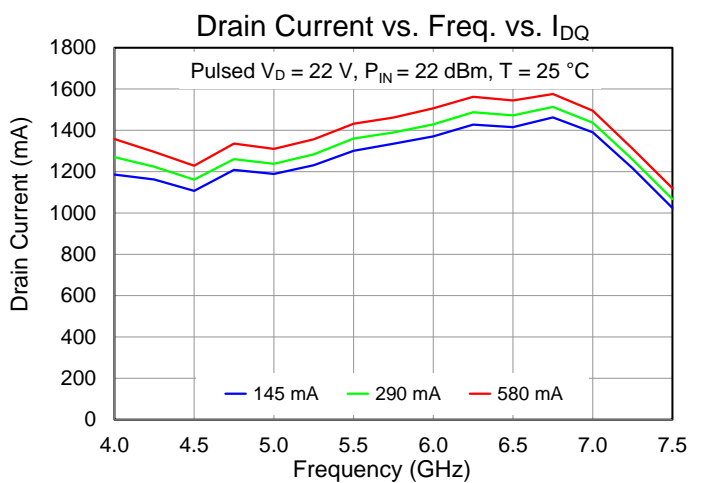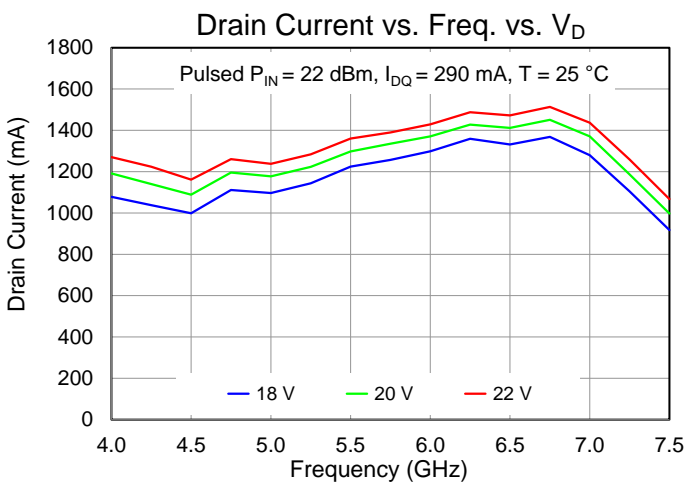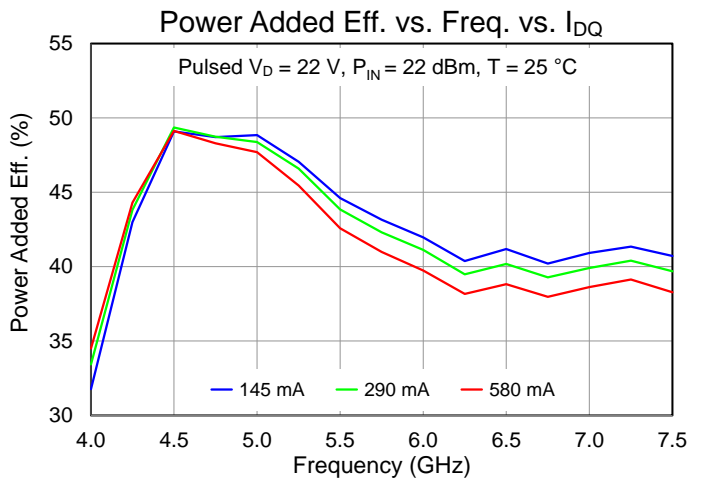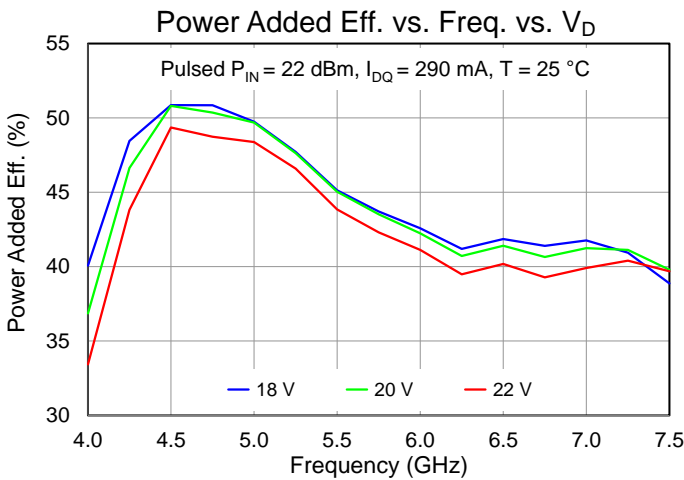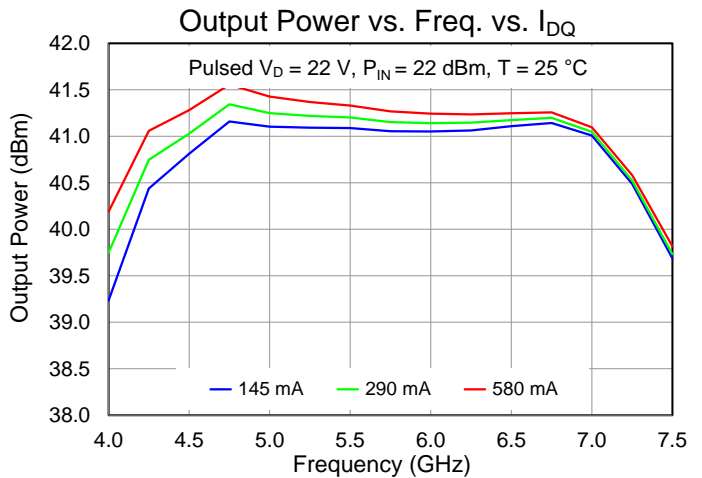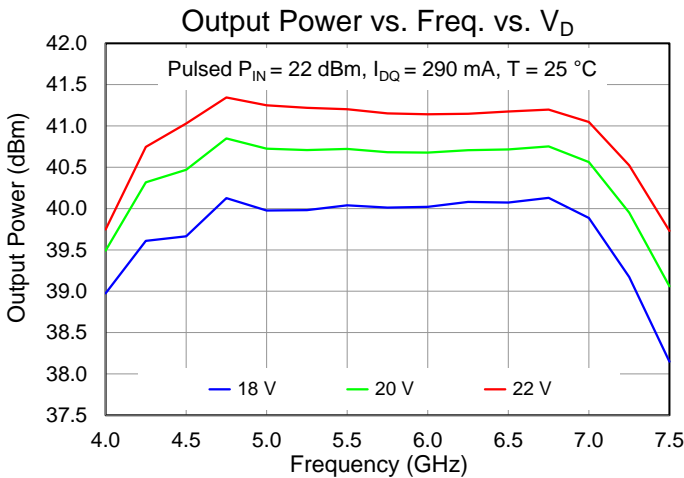







**Performance Plots – Linearity**

Test conditions unless otherwise noted: CW  $V_D = 22\text{ V}$ ,  $I_{DQ} = 290\text{ mA}$ , CW input power,  $T = +25\text{ }^\circ\text{C}$ , Freq. = 5.7 GHz,  $\Delta F = 10\text{ MHz}$

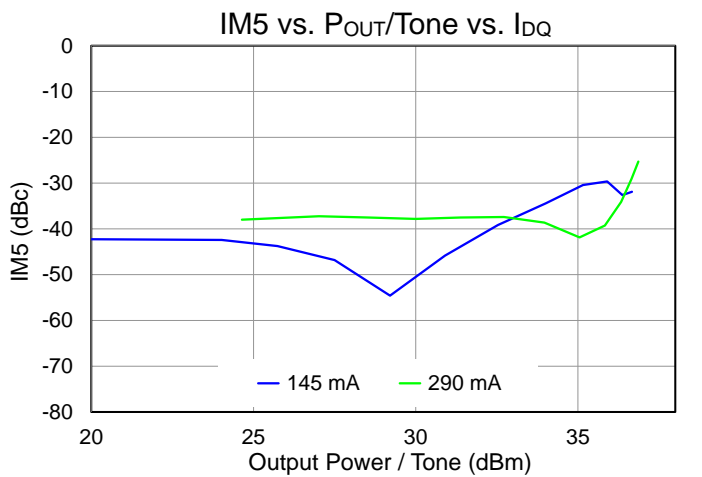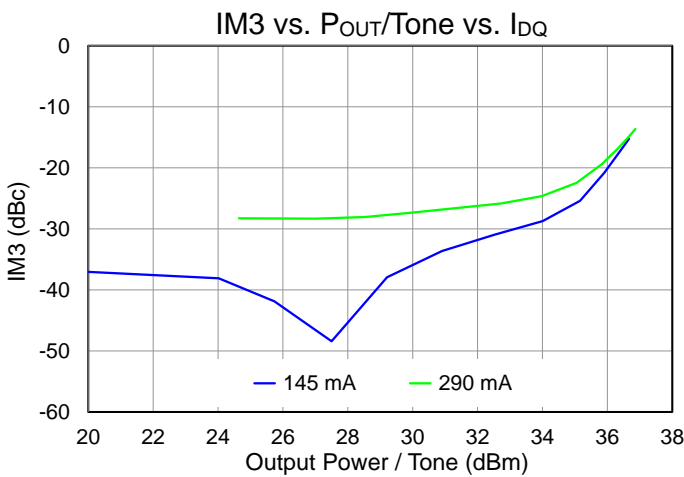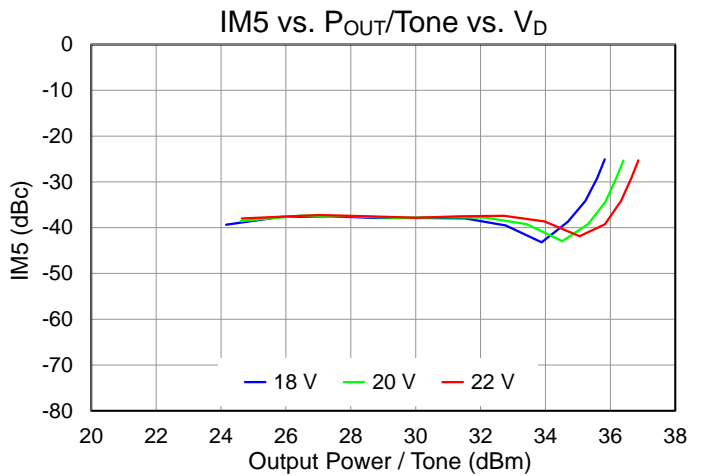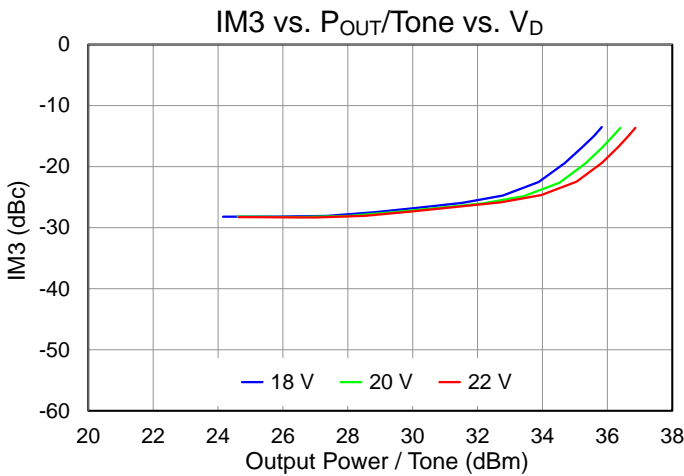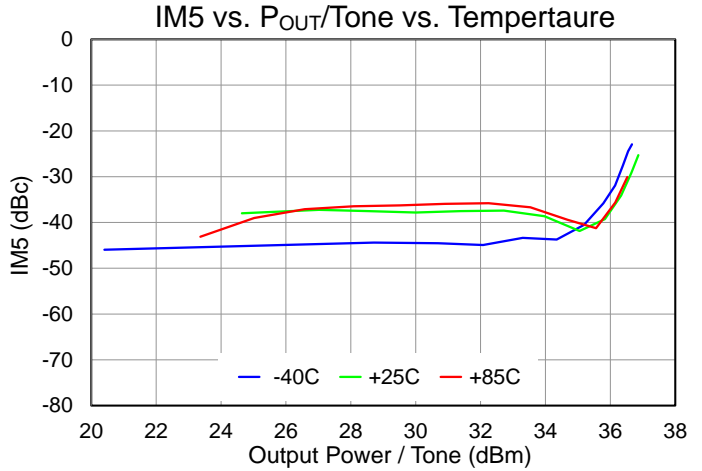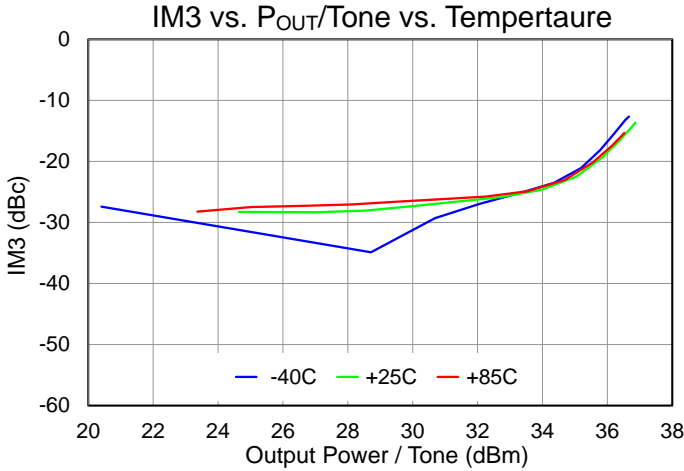







Performance Plots – Harmonics

Test conditions unless otherwise noted: CW  $V_D = 20$  V,  $I_{DQ} = 290$  mA, CW input power,  $T = +25$  °C, Freq. = 5.7 GHz

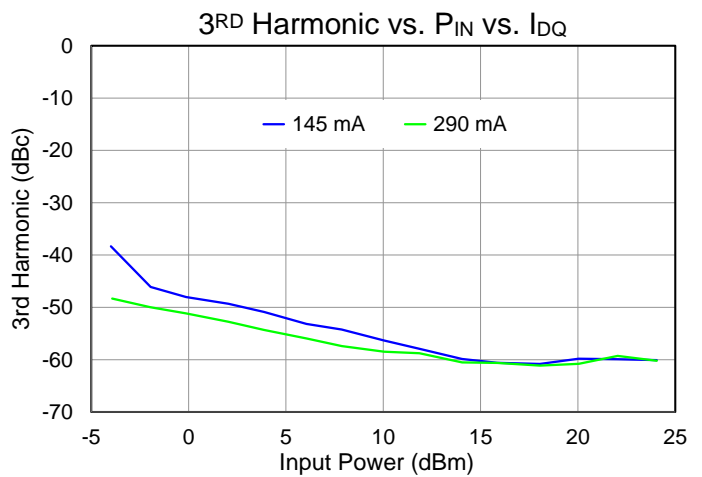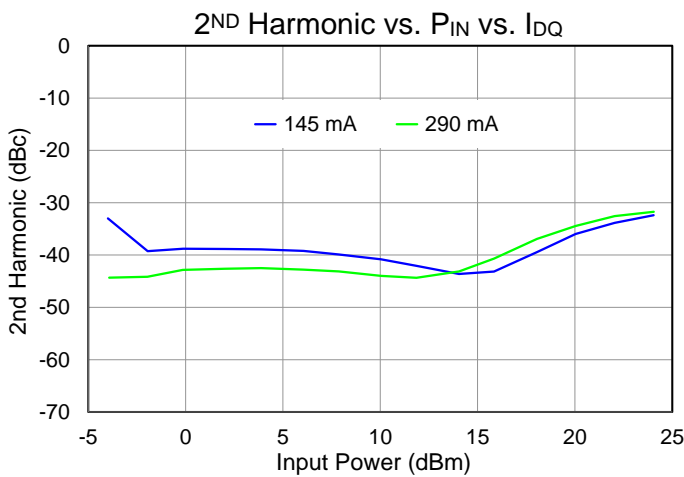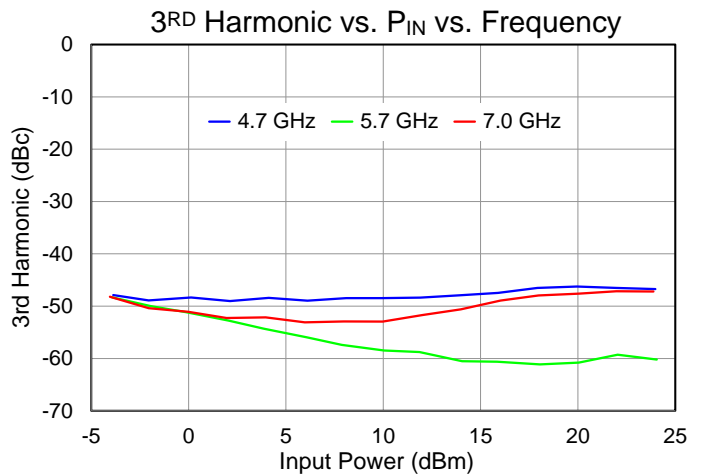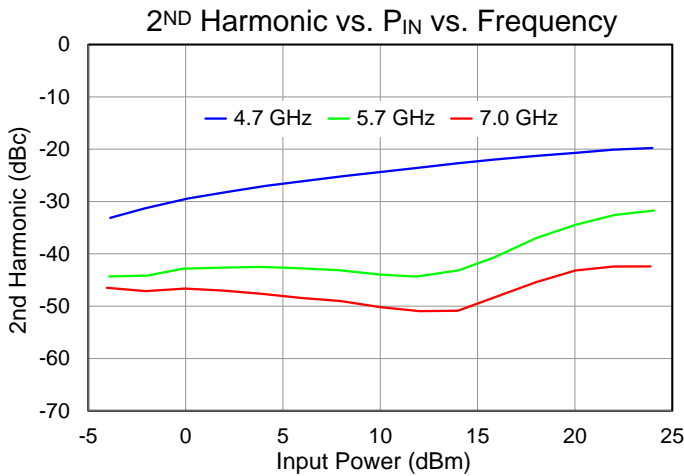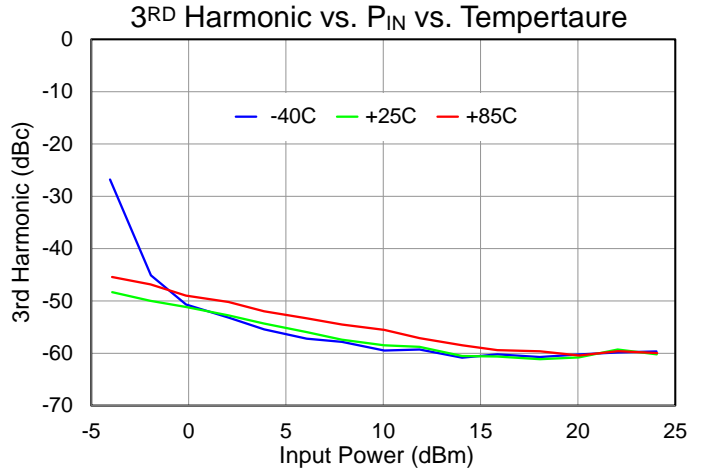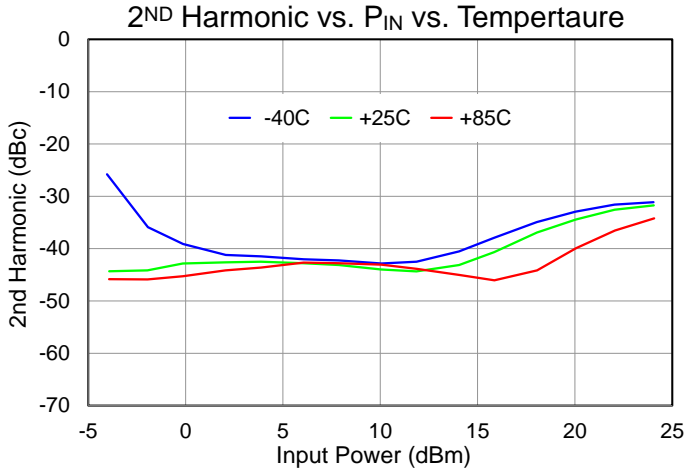




**Performance Plots – Small Signal**

Test conditions unless otherwise noted: CW  $V_D = 22\text{ V}$ ,  $I_{DQ} = 290\text{ mA}$ , CW input power,  $T = +25\text{ }^\circ\text{C}$

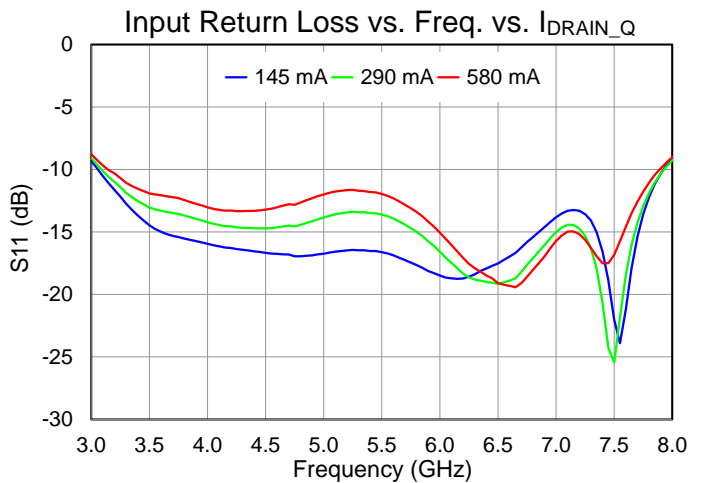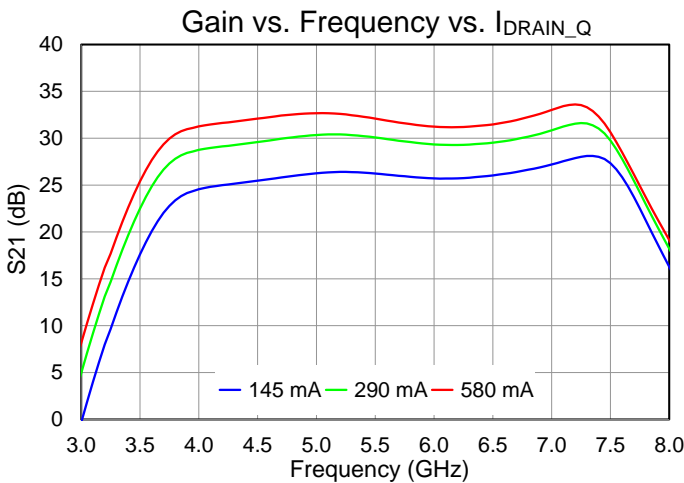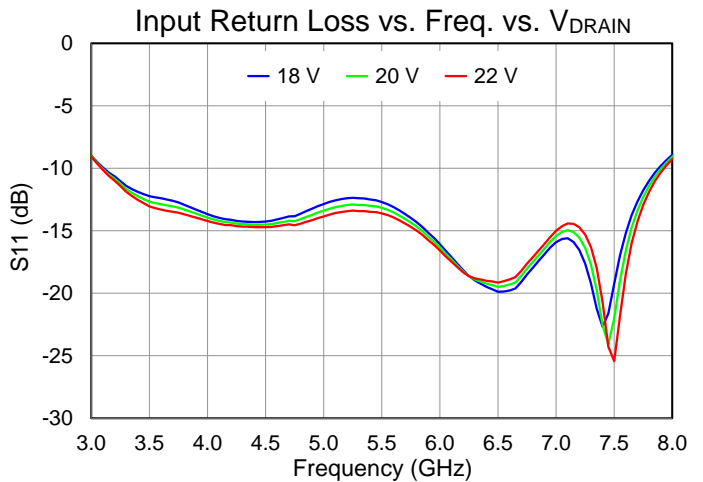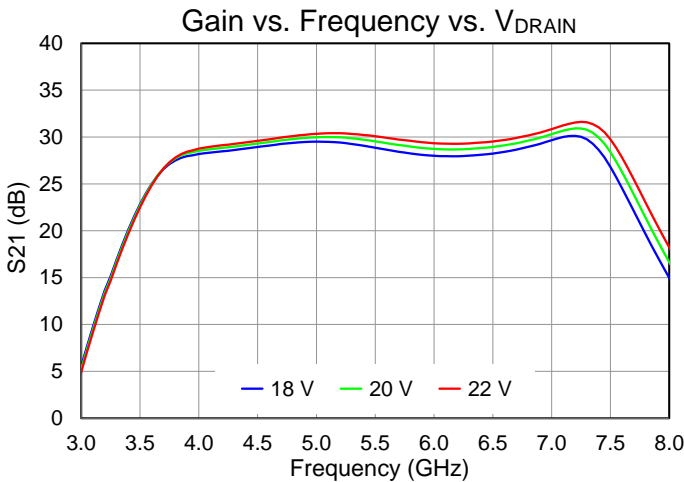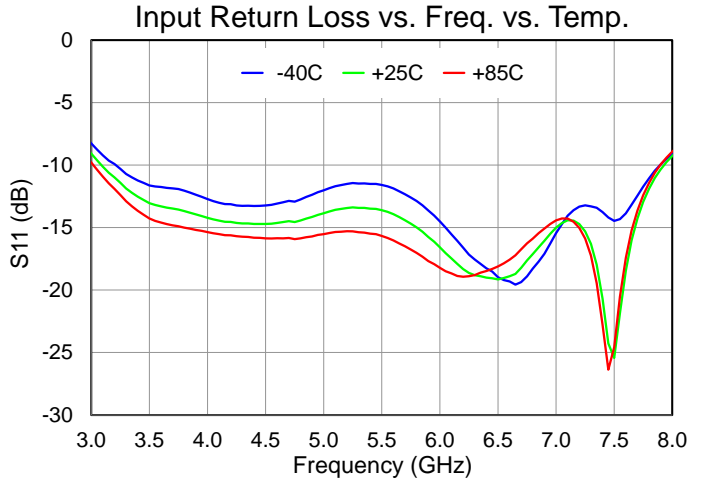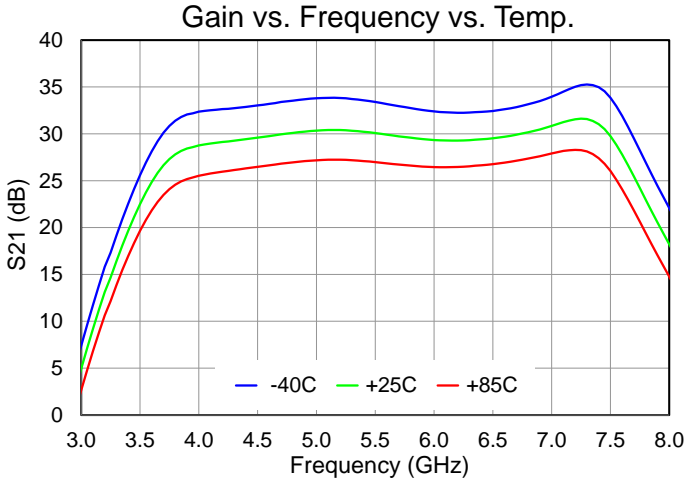

Performance Plots – Small Signal

Test conditions unless otherwise noted: CW  $V_D = 22\text{ V}$ ,  $I_{DQ} = 290\text{ mA}$ , CW input power,  $T = +25\text{ }^\circ\text{C}$

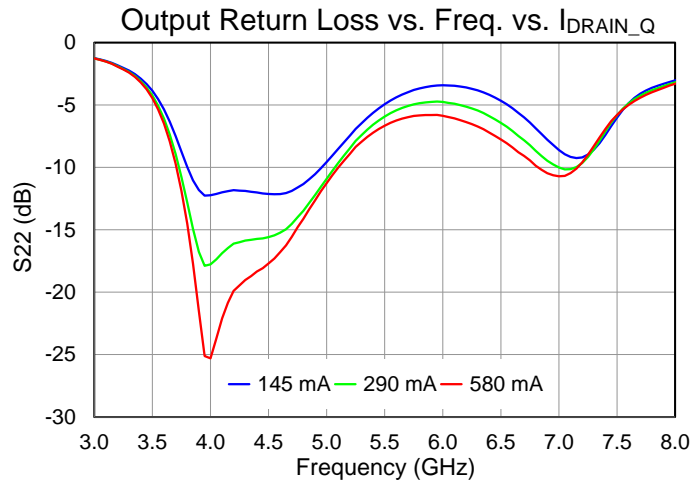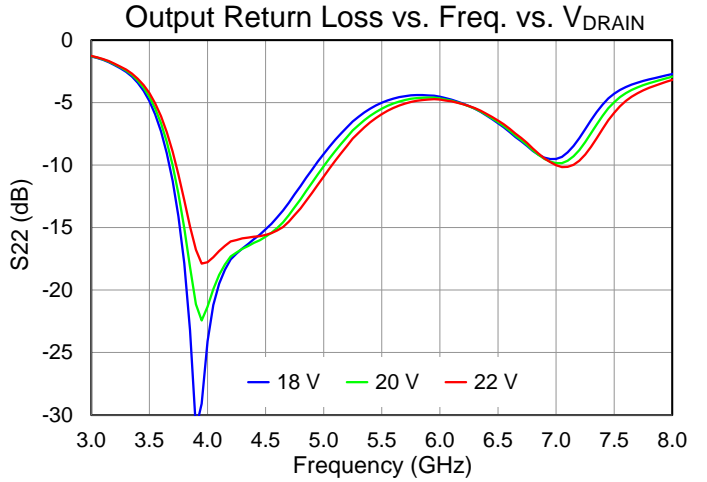
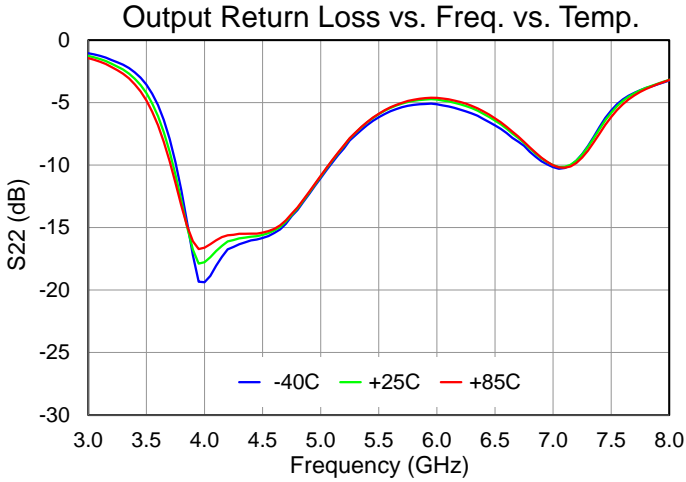


## Thermal and Reliability Information


Parameter	Test Conditions	Value	Units
Thermal Resistance ( $\theta_{JC}$ ) <sup>(1)</sup>	$T_{base} = 85\text{ }^{\circ}\text{C}$	3.20	$^{\circ}\text{C/W}$
Channel Temperature, $T_{CH}$ (Quiescent) <sup>(2)</sup>	$V_D = 22\text{ V}$ , $I_{DQ} = 290\text{ mA}$	105	$^{\circ}\text{C}$
Median Lifetime ( $T_M$ )	$P_{DISS} = 6.38\text{ W}$	6.5E+11	Hrs
Thermal Resistance ( $\theta_{JC}$ ) <sup>(1)</sup>	$T_{base} = 85\text{ }^{\circ}\text{C}$ , <b>CW</b> $V_D = 22\text{ V}$ , $I_{DQ} = 290\text{ mA}$ , Freq = 6.5 GHz, $I_{D\_Drive} = 1.38\text{ A}$ , $P_{IN} = 22\text{ dBm}$ , $P_{OUT} = 41\text{ dBm}$ ,	3.26	$^{\circ}\text{C/W}$
Channel Temperature, $T_{CH}$ (Under RF) <sup>(2)</sup>	$P_{DISS} = 17.9\text{ W}$	143	$^{\circ}\text{C}$
Median Lifetime ( $T_M$ )		7.6E+08	Hrs
Thermal Resistance ( $\theta_{JC}$ ) <sup>(1)</sup>	$T_{base} = 85\text{ }^{\circ}\text{C}$ , <b>Pulsed</b> $V_D = 22\text{ V}$ , $I_{DQ} = 290\text{ mA}$ , Freq = 6.5 GHz, $I_{D\_Drive} = 1.38\text{ A}$ , $P_{IN} = 22\text{ dBm}$ , $P_{OUT} = 41\text{ dBm}$ ,	2.13	$^{\circ}\text{C/W}$
Channel Temperature, $T_{CH}$ (Under RF) <sup>(2)</sup>	$P_{DISS} = 17.9\text{ W}$	123	$^{\circ}\text{C}$
Median Lifetime ( $T_M$ )		2.3E+10	Hrs

**Notes:**

- Thermal resistance determined to the back of package (85 °C)
- Channel temperature indicated is an IR scan equivalent temperature. Thermal resistance is calculated using this value. Additional information can be found in the Qorvo Applications Note “GaN Device TCHMAX Theta-JC and Reliability Estimates,” located here <https://www.qorvo.com/products/d/da006480>

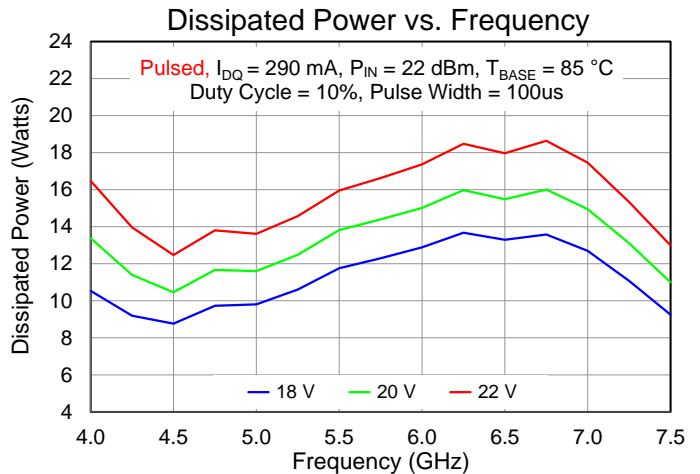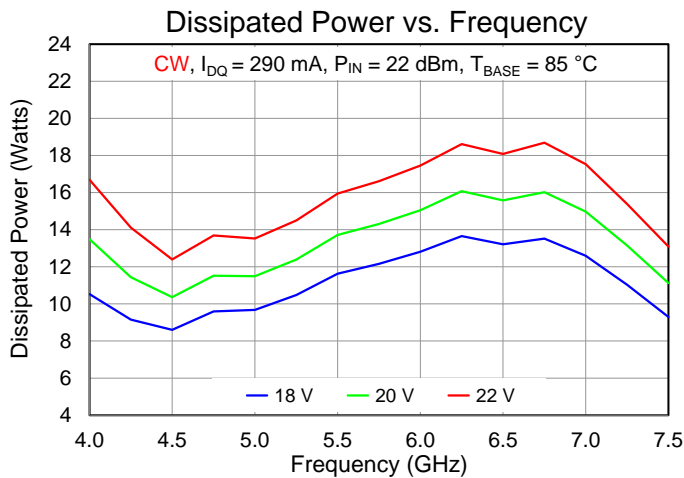

**Applications Circuit**

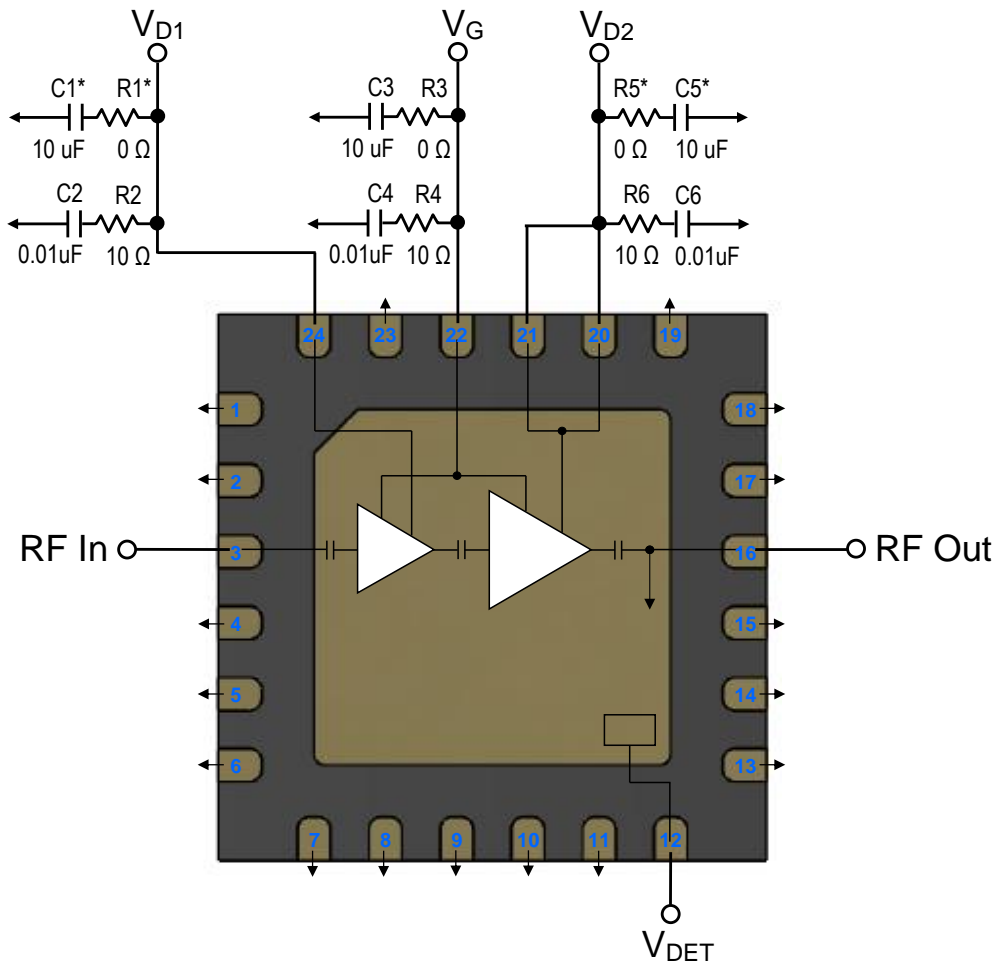

\* Remove C1, C5, R1, R5 for pulsed drain operation




**Bias-Up Procedure**

1. Set  $I_D$  limit (CW) to 2000 mA,  $I_G$  limit to 20 mA
2. Set  $V_G$  to -5.0 V
4. Set  $V_D$  +22 V
5. Adjust  $V_G$  more positive until  $I_{DQ} \approx 290$  mA ( $V_G \sim -2.5$  V +/- Typical)
6. Apply RF signal

**Bias-Down Procedure**

1. Turn off RF signal
2. Reduce  $V_G$  to -5.0 V. Ensure  $I_{DQ} \sim 0$  mA
4. Set  $V_D$  to 0 V
5. Turn off  $V_D$  supply
6. Turn off  $V_G$  supply

Application Evaluation Board (CW)

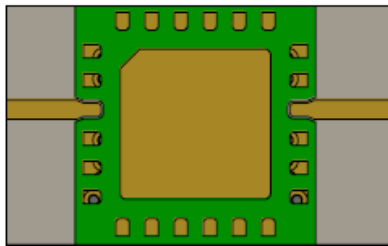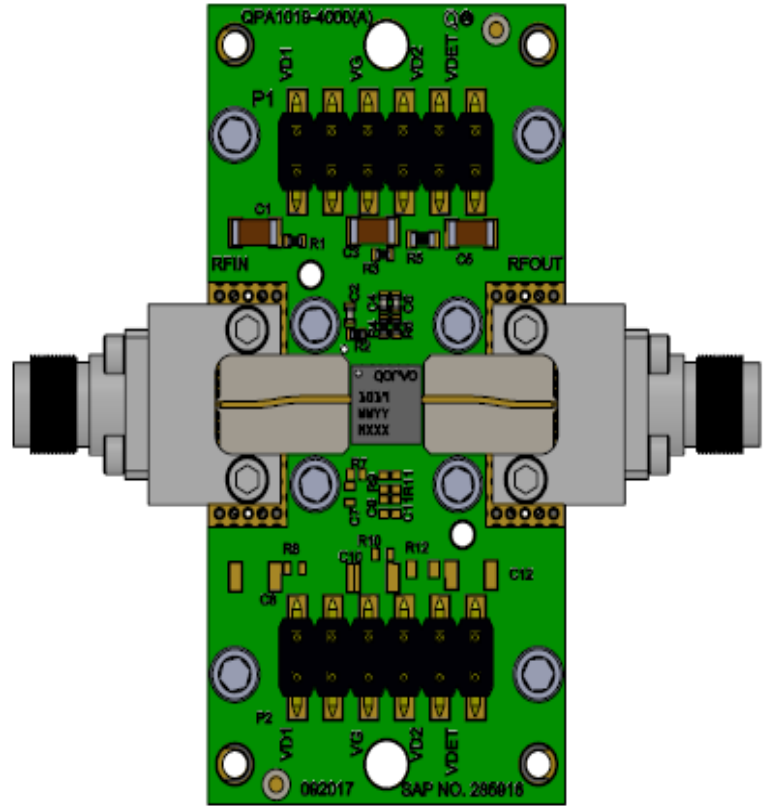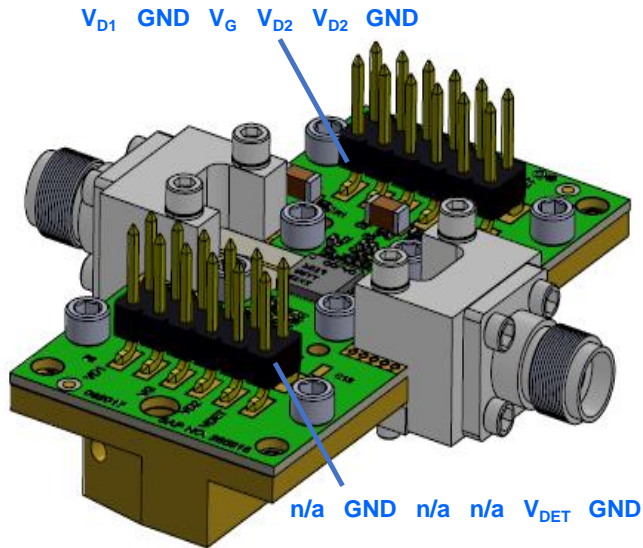

PCB Mounting


Notes:

1. RF PCB is Rogers 4003C; dielectric is 8 mil thick, copper cladding is ½ oz. copper both sides, plated to 1 oz
2. Copper Slug placed under the DUT to improve thermal and electrical performance

Bill of Materials

Reference Des.	Value	Description	Manuf.	Part Number
C1, C3, C5	10 uF	CAP, 10uF, 20%, 50V, 20%, X5R, 1206	Various	
C2, C4, C6	0.01 uF	CAP, 0.01uF, ±10%, 50V, X7R, 0402	Various	
R1, R3	0 Ω	RES, 0 OHM, JMPR, 0402	Various	
R2, R4, R6	10 Ω	RES, 10 OHM, 5%, 0.1W, 0402	Various	
R5	0 Ω	RES, 0 OHM, JMPR, 0603	Various	
H1, H2	-	Header, connector 2x6, SMD		
J1, J2	-	Connector, Female, End Launch, 1092-01A-5	Southwest Microwave	1092-01A-5
S1 – S7	-	Screw, Cap, socket head, 2-56x1/8"		
PCB	-	Rogers 4003C, 8 mil dielectric, 1 oz. copper (gold plated), 2 layers	Rogers Corp.	Custom
Carrier	-	T-Carrier, Copper C110, 1.744 x 2.201 x 0.275"		Custom
Solder	-	Paste, solder, syntech, Sn62/Pb36/Ag2		
Epoxy	-	Preform Epoxy, 0.986 x 1.996 x 0.003T		

## Mechanical Information

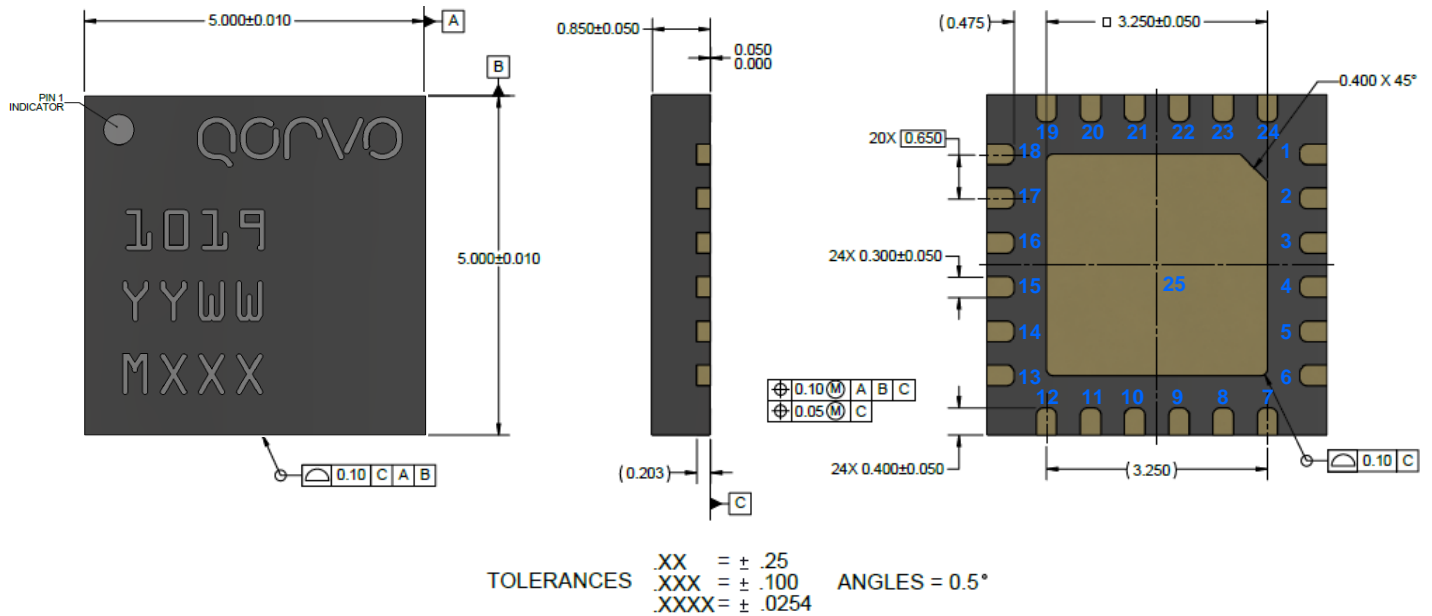

Notes: unless otherwise specified;


1. Dimensions: millimeters (mm)
2. Package leads are gold (Au) plated
3. Marking: YY is calendar year; WW is assembly week; MXXX is batch ID

## Pin Description

Pin Number	Symbol	Description
1-2, 4-11, 13-15, 17-19, 23	NC	No internal connection. Recommend grounding at the PCB level.
3	RF Input	RF Input; matched to $50 \Omega$ , DC blocked
12	$V_{DET}$	Output Power Detector Voltage
16	RF Output	RF Output; matched to $50 \Omega$ , DC blocked, DC grounded
20, 21	$V_{D2}$	Drain voltage for stage 2. Bias network is required; see Application Circuit on page 14 as an example.
22	$V_G$	Gate voltage. Bias network is required; see Application Circuit on page 14 as an example.
24	$V_{D1}$	Drain voltage for stage 1. Bias network is required; see Application Circuit on page 14 as an example.
25	GND	Ground connection (center pad)

**Tape and reel Information**

Standard T/R size = 250 pieces on a 7" reel  
 Dimensions: millimeters (mm)  
 Tolerances unless otherwise noted: .X = ± .2; .XX = ± .10

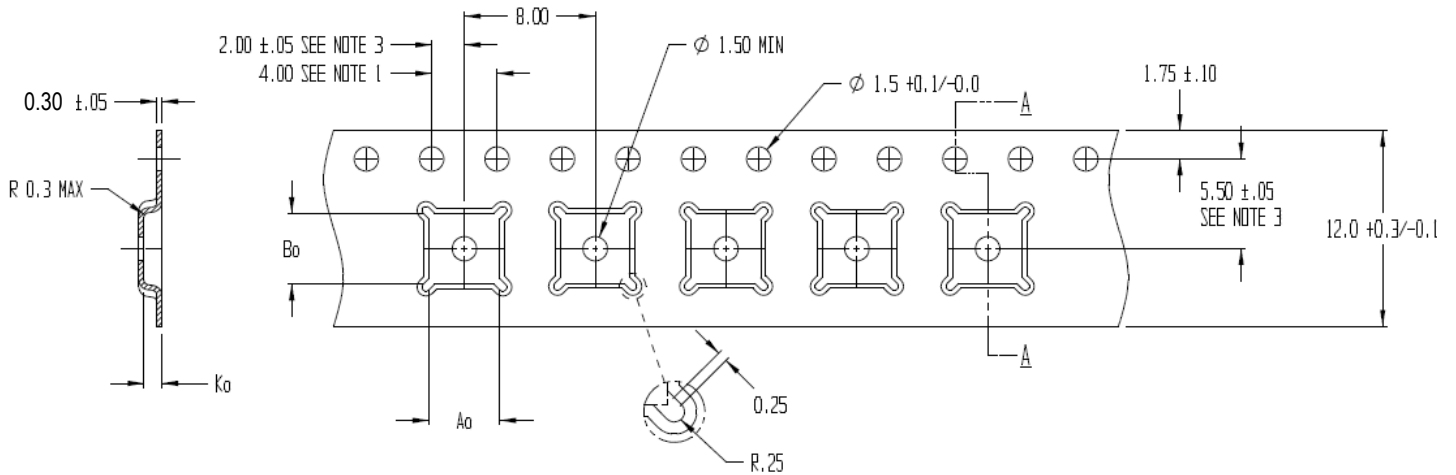


SECTION A - A

Ao = 5.25  
 Bo = 5.25  
 Ko = 1.10

Solderability

- Compatible with the latest version of J-STD-020, Lead-free solder, 260 °C
- Do not expose the package lid to temperatures > 280 °C

Recommended Soldering Temperature Profile

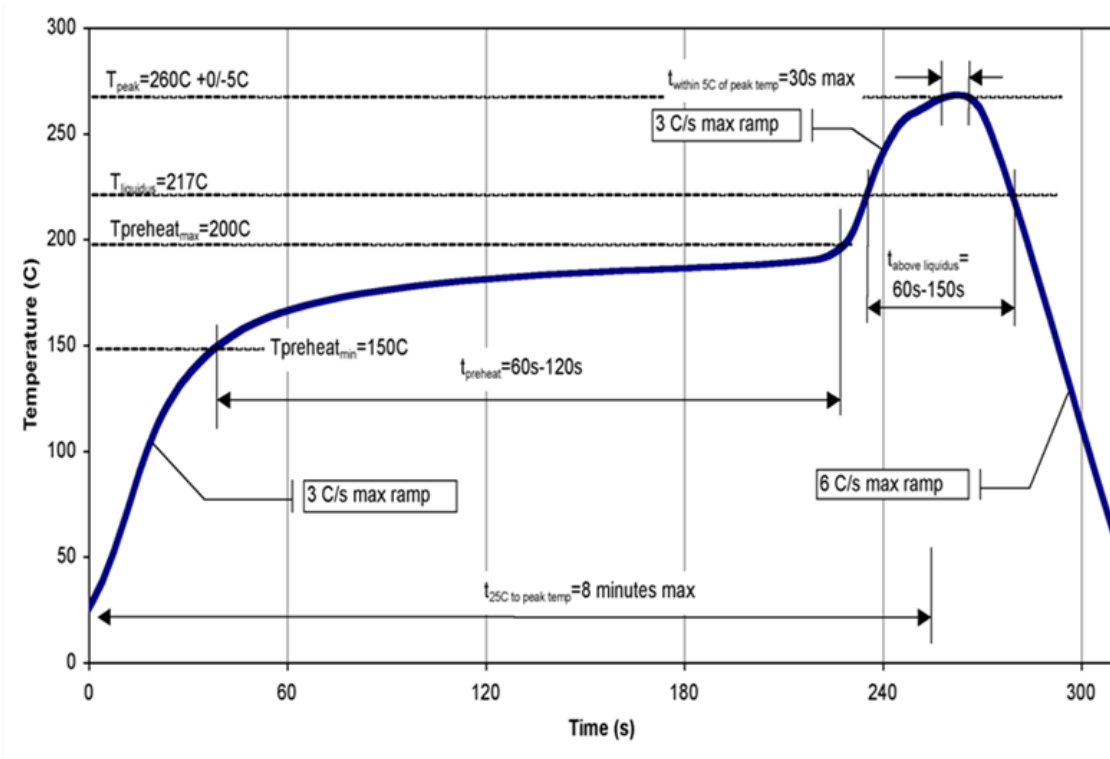

## Handling Precautions

Parameter	Rating	Standard
ESD – Human Body Model (HBM)	1C	ANSI/ESD/JEDEC JS-001
ESD – Charged Device Model (CDM)	C3	ANSI/ESD/JEDEC JS-002
MSL – Moisture Sensitivity Level	3	IPC/JEDEC J-STD-020



Caution!  
ESD-Sensitive Device

## RoHS Compliance

This product is compliant with the 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment), as amended by Directive 2015/863/EU.

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C<sub>15</sub>H<sub>12</sub>Br<sub>4</sub>O<sub>2</sub>) Free
- PFOS Free
- SVHC Free

## Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations:

Web: [www.qorvo.com](http://www.qorvo.com)

Tel: 1-844-890-8163

Email: [customer.support@qorvo.com](mailto:customer.support@qorvo.com)

## Important Notice



The information contained herein is believed to be reliable; however, Qorvo makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. **THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

Without limiting the generality of the foregoing, Qorvo products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Copyright 2018 © Qorvo, Inc. | Qorvo is a registered trademark of Qorvo, Inc.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View PTS641 SM25 SMTR2 LFS](#) on WIN SOURCE
-  [C&K Components](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management