



**THE DATASHEET OF
MM3Z43VT1G**



MM3ZxxxT1G Series, SZMM3ZxxxT1G Series

Zener Voltage Regulators

300 mW SOD-323 Surface Mount

This series of Zener diodes is packaged in a SOD-323 surface mount package that has a power dissipation of 300 mW. They are designed to provide voltage regulation protection and are especially attractive in situations where space is at a premium. They are well suited for applications such as cellular phones, hand held portables, and high density PC boards.

Specification Features:

- Standard Zener Breakdown Voltage Range – 2.4 V to 75 V
- Steady State Power Rating of 300 mW
- Small Body Outline Dimensions:
0.067" x 0.049" (1.7 mm x 1.25 mm)
- Low Body Height: 0.035" (0.9 mm)
- Package Weight: 4.507 mg/Unit
- ESD Rating of Class 3 (> 16 kV) per Human Body Model
- SZ Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These are Pb-Free Devices*

Mechanical Characteristics:

CASE: Void-free, Transfer-Molded Plastic

FINISH: All External Surfaces are Corrosion Resistant

MAXIMUM CASE TEMPERATURE FOR SOLDERING PURPOSES:

260°C for 10 Seconds

LEADS: Plated with Pb-Sn or Sn Only (Pb-Free)

POLARITY: Cathode Indicated by Polarity Band

FLAMMABILITY RATING: UL 94 V-0

MOUNTING POSITION: Any

MAXIMUM RATINGS

| Rating | Symbol | Max | Unit |
|--|-----------------|-------------|-------------|
| Total Device Dissipation FR-4 Board, (Note 1) @ $T_A = 25^\circ\text{C}$ Derate above 25°C | P_D | 300 2.4 | mW mW/°C |
| Thermal Resistance, Junction-to-Ambient | $R_{\theta JA}$ | 416 | °C/W |
| Junction and Storage Temperature Range | T_J, T_{stg} | -65 to +150 | °C |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. FR-4 printed circuit board, single-sided copper, mounting pad 1 cm².

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.




ON Semiconductor®


<http://onsemi.com>



SOD-323
CASE 477
STYLE 1



MARKING DIAGRAM



xx = Specific Device Code

M = Date Code*

▪ = Pb-Free Package

(Note: Microdot may be in either location)

*Date Code orientation may vary depending upon manufacturing location.

ORDERING INFORMATION

| Device | Package | Shipping† |
|--------------|----------------------|------------------------|
| MM3ZxxxT1G | SOD-323 (Pb-Free) | 3,000 / Tape & Reel |
| SZMM3ZxxxT1G | SOD-323 (Pb-Free) | 3,000 / Tape & Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

DEVICE MARKING INFORMATION

See specific marking information in the device marking column of the Electrical Characteristics table on page 2 of this data sheet.

MM3ZxxxT1G Series, SZMM3ZxxxT1G Series

ELECTRICAL CHARACTERISTICS

| Symbol | Parameter |
|--------------|--|
| V_Z | Reverse Zener Voltage @ I_{ZT} |
| I_{ZT} | Reverse Current |
| Z_{ZT} | Maximum Zener Impedance @ I_{ZT} |
| I_{ZK} | Reverse Current |
| Z_{ZK} | Maximum Zener Impedance @ I_{ZK} |
| I_R | Reverse Leakage Current @ V_R |
| V_R | Reverse Voltage |
| I_F | Forward Current |
| V_F | Forward Voltage @ I_F |
| ΘV_Z | Maximum Temperature Coefficient of V_Z |
| C | Max. Capacitance @ $V_R = 0$ and $f = 1$ MHz |



ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted, $V_F = 0.9$ V Max. @ $I_F = 10$ mA for all types)

| Device* | Device Marking | Zener Voltage (Note 2) | | | | Zener Impedance | | | Leakage Current | | ΘV_Z (mV/k) @ I_{ZT} | | C @ $V_R = 0$ f = 1 MHz |
|------------|----------------|------------------------|-------|------|------------|---------------------|---------------------|-----|-----------------|-------|--------------------------------|------|-------------------------|
| | | V_Z (Volts) | | | @ I_{ZT} | Z_{ZT} @ I_{ZT} | Z_{ZK} @ I_{ZK} | | I_R @ V_R | | Min | Max | pF |
| | | Min | Nom | Max | mA | Ω | Ω | mA | μA | Volts | | | |
| MM3Z2V4T1G | 00 | 2.2 | 2.4 | 2.6 | 5 | 100 | 1000 | 0.5 | 50 | 1.0 | -3.5 | 0 | 450 |
| MM3Z2V7T1G | 01 | 2.5 | 2.7 | 2.9 | 5 | 100 | 1000 | 0.5 | 20 | 1.0 | -3.5 | 0 | 450 |
| MM3Z3V0T1G | 02 | 2.8 | 3.0 | 3.2 | 5 | 100 | 1000 | 0.5 | 10 | 1.0 | -3.5 | 0 | 450 |
| MM3Z3V3T1G | 05 | 3.1 | 3.3 | 3.5 | 5 | 95 | 1000 | 0.5 | 5 | 1.0 | -3.5 | 0 | 450 |
| MM3Z3V6T1G | 06 | 3.4 | 3.6 | 3.8 | 5 | 90 | 1000 | 0.5 | 5 | 1.0 | -3.5 | 0 | 450 |
| MM3Z3V9T1G | 07 | 3.7 | 3.9 | 4.1 | 5 | 90 | 1000 | 0.5 | 3 | 1.0 | -3.5 | -2.5 | 450 |
| MM3Z4V3T1G | 08 | 4.0 | 4.3 | 4.6 | 5 | 90 | 1000 | 0.5 | 3 | 1.0 | -3.5 | 0 | 450 |
| MM3Z4V7T1G | 09 | 4.4 | 4.7 | 5.0 | 5 | 80 | 800 | 0.5 | 3 | 2.0 | -3.5 | 0.2 | 260 |
| MM3Z5V1T1G | 0A | 4.8 | 5.1 | 5.4 | 5 | 60 | 500 | 0.5 | 2 | 2.0 | -2.7 | 1.2 | 225 |
| MM3Z5V6T1G | 0C | 5.2 | 5.6 | 6.0 | 5 | 40 | 200 | 0.5 | 1 | 2.0 | -2.0 | 2.5 | 200 |
| MM3Z6V2T1G | 0E | 5.8 | 6.2 | 6.6 | 5 | 10 | 100 | 0.5 | 3 | 4.0 | 0.4 | 3.7 | 185 |
| MM3Z6V8T1G | 0F | 6.4 | 6.8 | 7.2 | 5 | 15 | 160 | 0.5 | 2 | 4.0 | 1.2 | 4.5 | 155 |
| MM3Z7V5T1G | 0G | 7.0 | 7.5 | 7.9 | 5 | 15 | 160 | 0.5 | 1 | 5.0 | 2.5 | 5.3 | 140 |
| MM3Z8V2T1G | 0H | 7.7 | 8.2 | 8.7 | 5 | 15 | 160 | 0.5 | 0.7 | 5.0 | 3.2 | 6.2 | 135 |
| MM3Z9V1T1G | 0K | 8.5 | 9.1 | 9.6 | 5 | 15 | 160 | 0.5 | 0.2 | 7.0 | 3.8 | 7.0 | 130 |
| MM3Z10VT1G | 0L | 9.4 | 10 | 10.6 | 5 | 20 | 160 | 0.5 | 0.1 | 8.0 | 4.5 | 8.0 | 130 |
| MM3Z11VT1G | 0M | 10.4 | 11 | 11.6 | 5 | 20 | 160 | 0.5 | 0.1 | 8.0 | 5.4 | 9.0 | 130 |
| MM3Z12VT1G | 0N | 11.4 | 12 | 12.7 | 5 | 25 | 80 | 0.5 | 0.1 | 8.0 | 6.0 | 10 | 130 |
| MM3Z13VT1G | 0P | 12.4 | 13.25 | 14.1 | 5 | 30 | 80 | 0.5 | 0.1 | 8.0 | 7.0 | 11 | 120 |
| MM3Z15VT1G | 0T | 14.3 | 15 | 15.8 | 5 | 30 | 80 | 0.5 | 0.05 | 10.5 | 9.2 | 13 | 110 |
| MM3Z16VT1G | 0U | 15.3 | 16.2 | 17.1 | 5 | 40 | 80 | 0.5 | 0.05 | 11.2 | 10.4 | 14 | 105 |
| MM3Z18VT1G | 0W | 16.8 | 18 | 19.1 | 5 | 45 | 80 | 0.5 | 0.05 | 12.6 | 12.4 | 16 | 100 |
| MM3Z20VT1G | 0Z | 18.8 | 20 | 21.2 | 5 | 55 | 100 | 0.5 | 0.05 | 14.0 | 14.4 | 18 | 85 |
| MM3Z22VT1G | 10 | 20.8 | 22 | 23.3 | 5 | 55 | 100 | 0.5 | 0.05 | 15.4 | 16.4 | 20 | 85 |
| MM3Z24VT1G | 11 | 22.8 | 24.2 | 25.6 | 5 | 70 | 120 | 0.5 | 0.05 | 16.8 | 18.4 | 22 | 80 |
| MM3Z27VT1G | 12 | 25.1 | 27 | 28.9 | 2 | 80 | 300 | 0.5 | 0.05 | 18.9 | 21.4 | 25.3 | 70 |
| MM3Z30VT1G | 14 | 28 | 30 | 32 | 2 | 80 | 300 | 0.5 | 0.05 | 21.0 | 24.4 | 29.4 | 70 |
| MM3Z33VT1G | 18 | 31 | 33 | 35 | 2 | 80 | 300 | 0.5 | 0.05 | 23.2 | 27.4 | 33.4 | 70 |
| MM3Z36VT1G | 19 | 34 | 36 | 38 | 2 | 90 | 500 | 0.5 | 0.05 | 25.2 | 30.4 | 37.4 | 70 |
| MM3Z39VT1G | 20 | 37 | 39 | 41 | 2 | 130 | 500 | 0.5 | 0.05 | 27.3 | 33.4 | 41.2 | 45 |
| MM3Z43VT1G | 21 | 40 | 43 | 46 | 2 | 150 | 500 | 0.5 | 0.05 | 30.1 | 37.6 | 46.6 | 40 |
| MM3Z47VT1G | 1A | 44 | 47 | 50 | 2 | 170 | 500 | 0.5 | 0.05 | 32.9 | 42.0 | 51.8 | 40 |
| MM3Z51VT1G | 1C | 48 | 51 | 54 | 2 | 180 | 500 | 0.5 | 0.05 | 35.7 | 46.6 | 57.2 | 40 |
| MM3Z56VT1G | 1D | 52 | 56 | 60 | 2 | 200 | 500 | 0.5 | 0.05 | 39.2 | 52.2 | 63.8 | 40 |
| MM3Z62VT1G | 2A | 58 | 62 | 66 | 2 | 215 | 500 | 0.5 | 0.05 | 43.4 | 58.9 | 71.8 | 35 |
| MM3Z68VT1G | 1F | 64 | 68 | 72 | 2 | 240 | 500 | 0.5 | 0.05 | 47.6 | 65.6 | 79.8 | 35 |
| MM3Z75VT1G | 1G | 70 | 75 | 79 | 2 | 255 | 500 | 0.5 | 0.05 | 52.5 | 73.4 | 88.6 | 35 |

*Includes SZ-prefix devices where applicable.

2. Zener voltage is measured with a pulse test current I_Z at an ambient temperature of 25°C .

MM3ZxxxT1G Series, SZMM3ZxxxT1G Series

TYPICAL CHARACTERISTICS

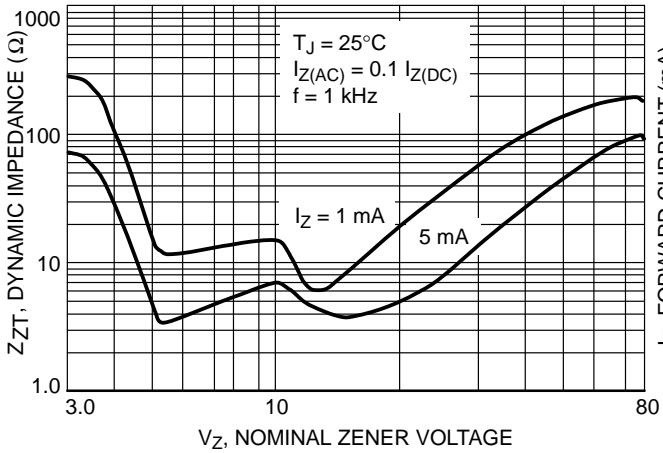


Figure 1. Effect of Zener Voltage on Zener Impedance

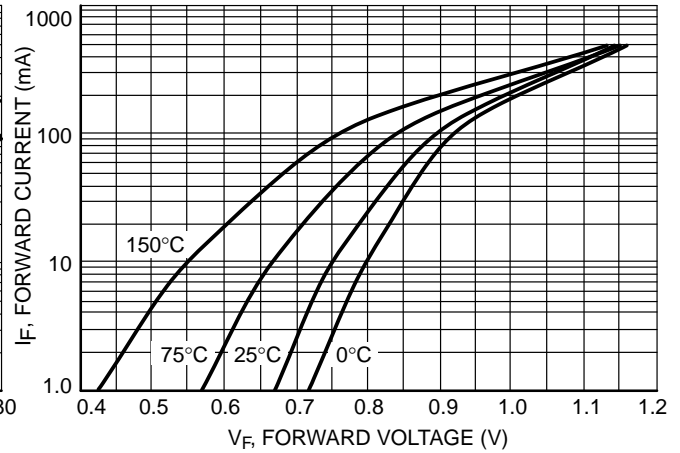


Figure 2. Typical Forward Voltage

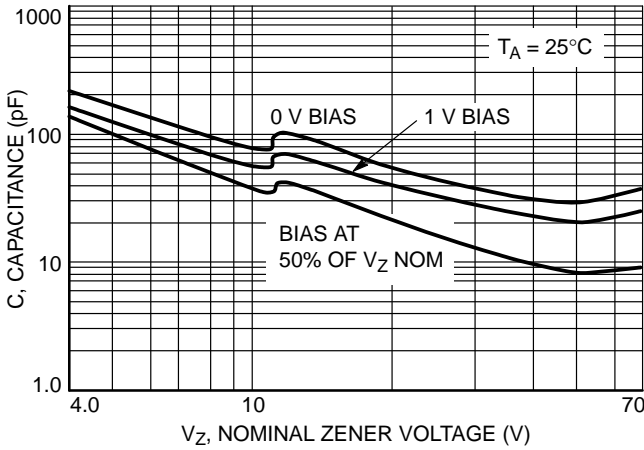


Figure 3. Typical Capacitance

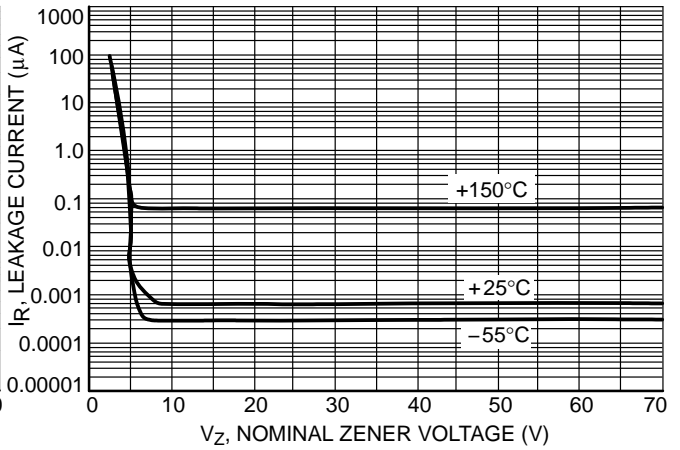


Figure 4. Typical Leakage Current

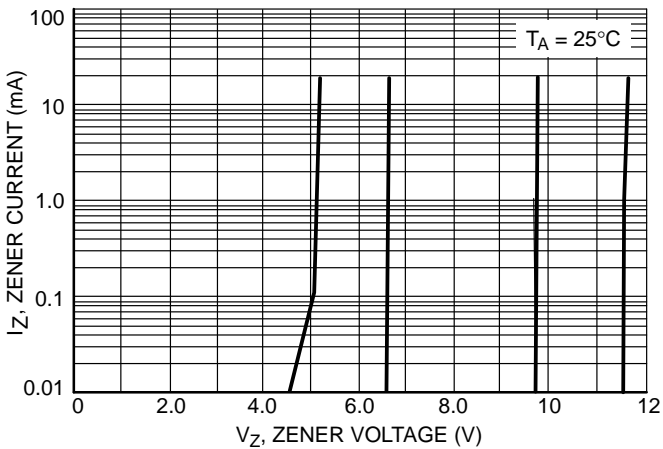


Figure 5. Zener Voltage versus Zener Current (V_Z Up to 12 V)

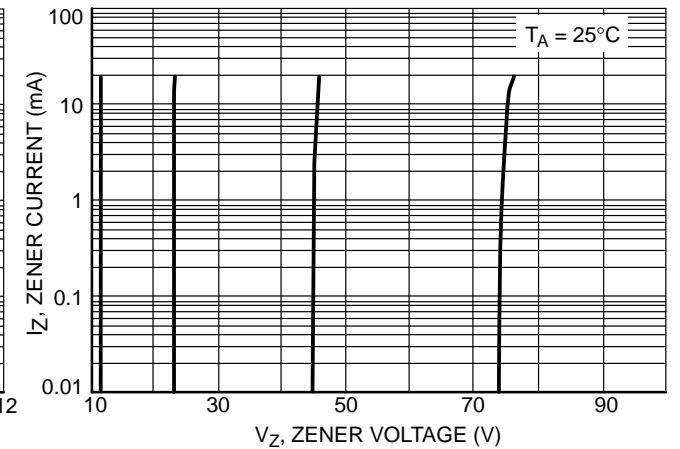


Figure 6. Zener Voltage versus Zener Current (12 V to 75 V)

MM3ZxxxT1G Series, SZMM3ZxxxT1G Series

TYPICAL CHARACTERISTICS


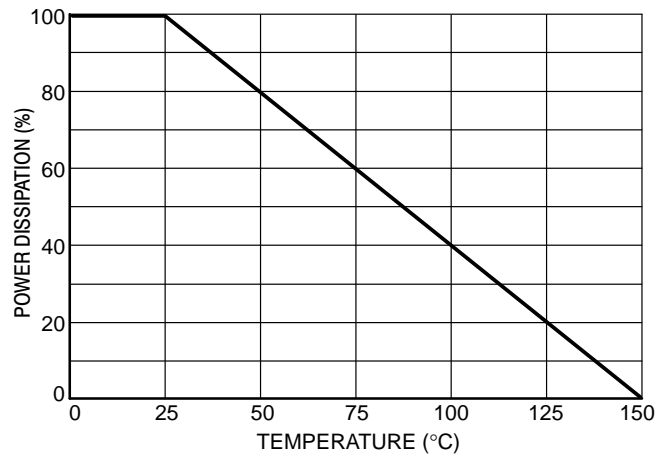


Figure 7. Steady State Power Derating

MM3ZxxxT1G Series, SZMM3ZxxxT1G Series

PACKAGE DIMENSIONS

SOD-323
CASE 477-02
ISSUE H

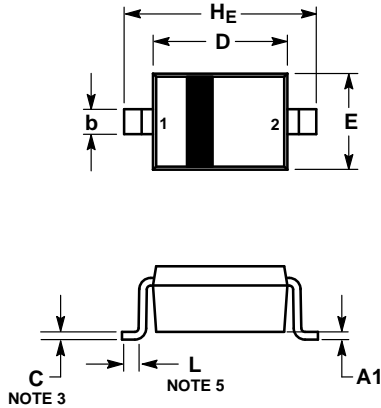


NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. LEAD THICKNESS SPECIFIED PER L/F DRAWING WITH SOLDER PLATING.
4. DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.
5. DIMENSION L IS MEASURED FROM END OF RADIUS.

| DIM | MILLIMETERS | | | INCHES | | |
|-----|-------------|------|-------|-----------|-------|-------|
| | MIN | NOM | MAX | MIN | NOM | MAX |
| A | 0.80 | 0.90 | 1.00 | 0.031 | 0.035 | 0.040 |
| A1 | 0.00 | 0.05 | 0.10 | 0.000 | 0.002 | 0.004 |
| A3 | 0.15 REF | | | 0.006 REF | | |
| b | 0.25 | 0.32 | 0.4 | 0.010 | 0.012 | 0.016 |
| C | 0.089 | 0.12 | 0.177 | 0.003 | 0.005 | 0.007 |
| D | 1.60 | 1.70 | 1.80 | 0.062 | 0.066 | 0.070 |
| E | 1.15 | 1.25 | 1.35 | 0.045 | 0.049 | 0.053 |
| L | 0.08 | | | 0.003 | | |
| HE | 2.30 | 2.50 | 2.70 | 0.090 | 0.098 | 0.105 |

STYLE 1:
PIN 1. CATHODE
2. ANODE

SOLDERING FOOTPRINT*

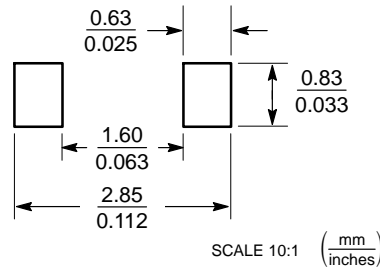

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com
Order Literature: <http://www.onsemi.com/orderlit>
For additional information, please contact your local Sales Representative

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View MM3Z43VT1G](#) on WIN SOURCE

 [ON Semiconductor](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management