
THE DATASHEET OF


2752065447

** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

SIZE	PART NO.	REV.
B	2752065447	~

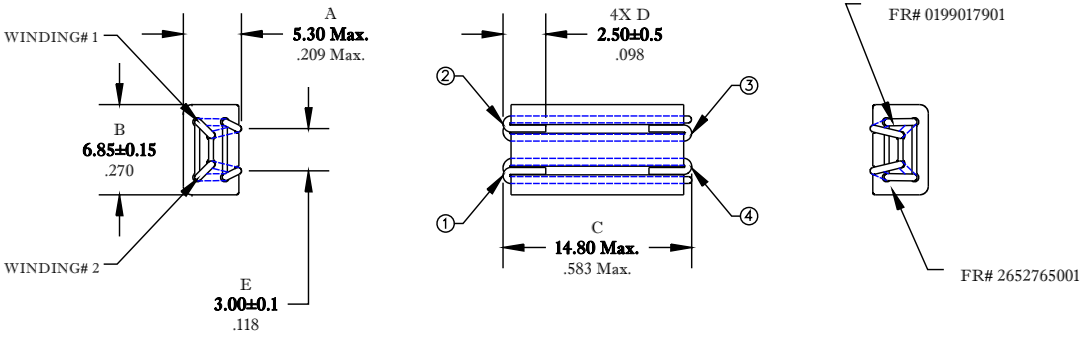



IMPEDANCE VALUES ARE MEASURED BETWEEN TERMINALS 1 AND 4, OR 2 AND 3, ON A HP4191A, USING A 16092A FIXTURE, WITH FIXTURE COMPENSATION

Impedance (Ohms)		
100 MHz	250 MHz	500 MHz
185 Min.	305 Min.	360 Min.

DIMENSIONS
BOLD NUMBERS ARE IN MILLIMETERS
LIGHT NUMBERS ARE IN INCHES

NOTES:

1 – PARTS MEETS FAIR-RITE PRODUCTS VISUAL INSPECTION CRITERIA FOR GENERIC SURFACE MOUNT BEADS.

2 – PARTS MEET FAIR-RITE PRODUCTS SOP# ELC-27, FOR THERMAL SHOCK RESISTANCE.

3 – WIRE MEETS SOLDERABILITY SPECIFICATION WHEN TESTED PER SOP# ELC-57.

4 – COPLANARITY BETWEEN LEADS: **0.15mm** [.006"] Max.

5 – PARTS ARE SUPPLIED TAPED AND REELED PER IEC 60286-3 AND EIA 481 STANDARDS.

6 – PARTS ARE TO BE 100% TESTED & 100% CERTIFIED FOR BREAKDOWN VOLTAGE BETWEEN CONDUCTORS: 1000 Vdc.

FR# 52

FAIR-RITE PRODUCTS CORP.

TITLE: MULTI-TURN COMMON MODE BEAD

DRAWN BY	DATE	SIZE	PART NO.	REV.
D. FOOTE	9/18/2019	B	2752065447	~
CHKD BY				
APPRVD BY		SCALE: NONE		SHEET 1 OF 1

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- View 2752065447 on WIN SOURCE
- FAIR-RITE PRODUCTS Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- Global Sourcing Solution
- Obsolete Management
- Cost Control Management
- Shortage Management
- Alternative Solution
- Excess Inventory Management